


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

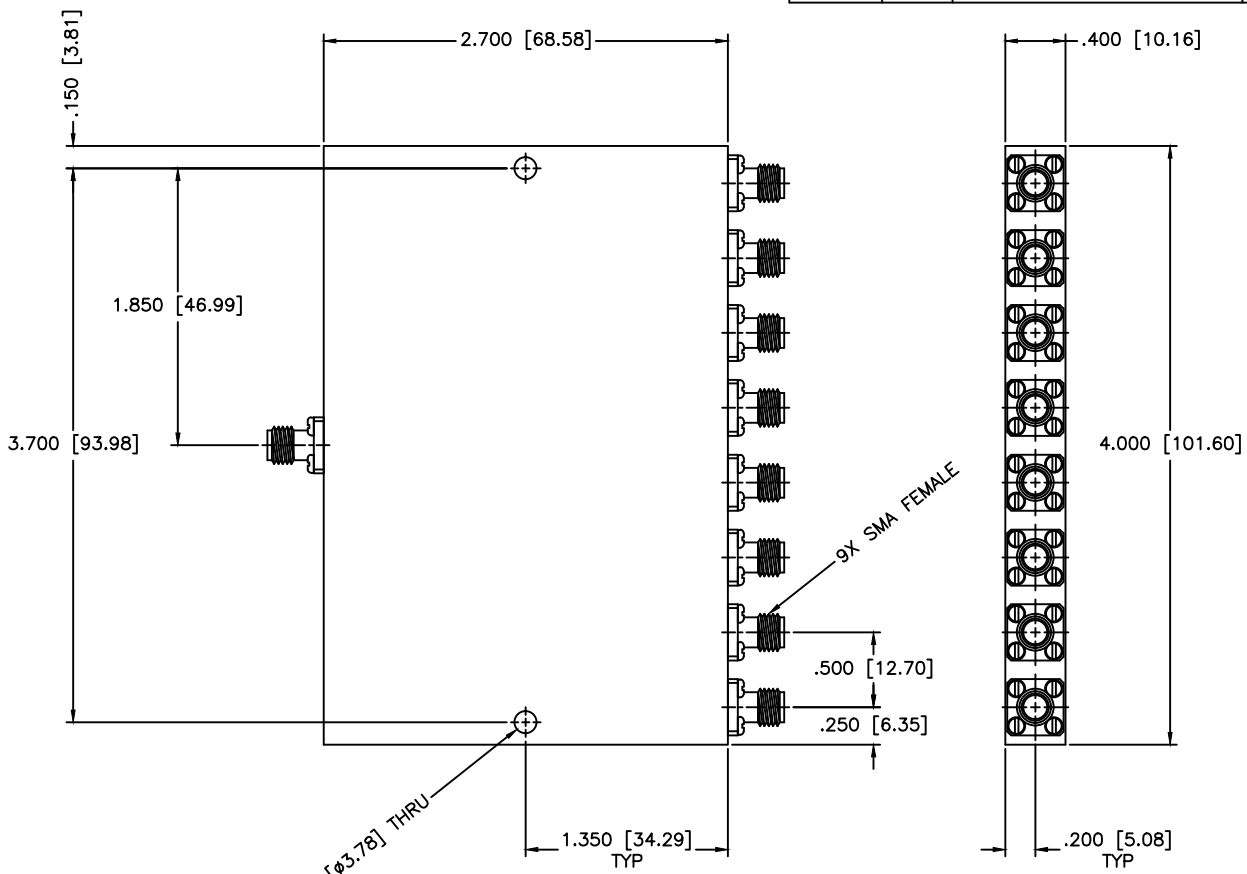

SPECIFICATIONS

- Frequency Range: 0.8–2.7 GHz
- Insertion Loss: 1.4dB Max.
- Isolation: 17dB Min.
- Power Rating: 30 Watts
- Amplitude Balance: ± 0.4 dB Max.
- VSWR IN/OUT: 1.50:1/1.45:1 Max.
- Phase Balance: ± 10 Deg. Max.

2x ø.149 [ø3.78] THRU

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:	8-WAY POWER DIVIDER
DRAWN:		DATE:		PART NO.		PS8-122
Paiboon Luekhamhan		10-15-1998		CAGE CODE:		
APPROVED:		DATE:		SIZE:		DO NOT SCALE THE DRAWING
T. Nguyen		10-15-1998		N/A		
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV:		DWG NO.
		THIRD ANGLE PROJECTION 		N/A		
				OD2L5		86295