


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

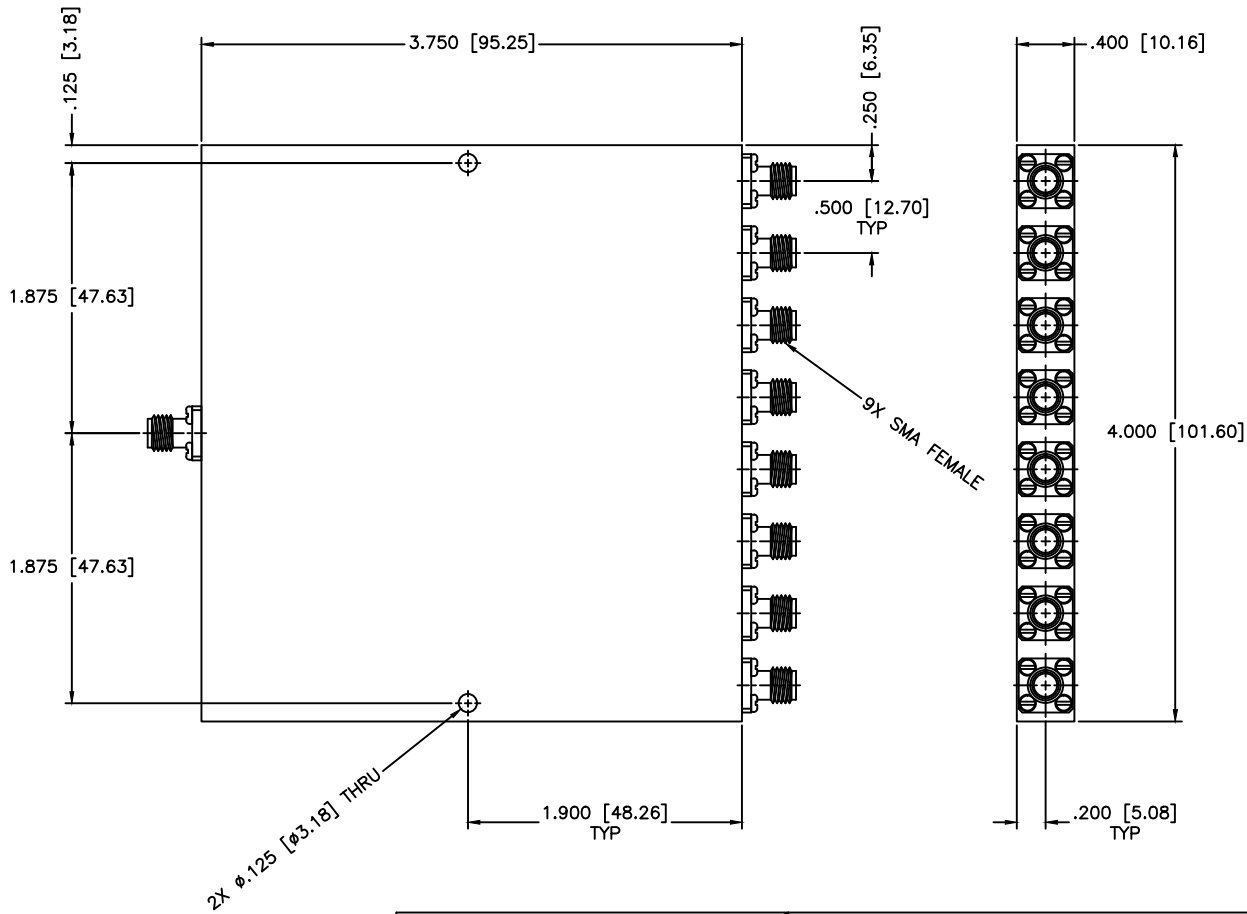

SPECIFICATIONS

Frequency Range: 2-18 GHz
 VSWR In/Out: 1.80:1/1.80:1 Max.
 Insertion Loss: 3.8dB Max.
 Isolation: 15dB Min.
 Phase Balance: ±18 Deg. Max.
 Amplitude Balance: ±0.8dB Max.
 Power Rating: 20W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS8-13		
DATE: 10-02-1997		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 10-02-1997		SIZE: N/A
THIRD ANGLE PROJECTION		REV: N/A		DWG NO. 80253
		DO NOT SCALE THE DRAWING		