


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

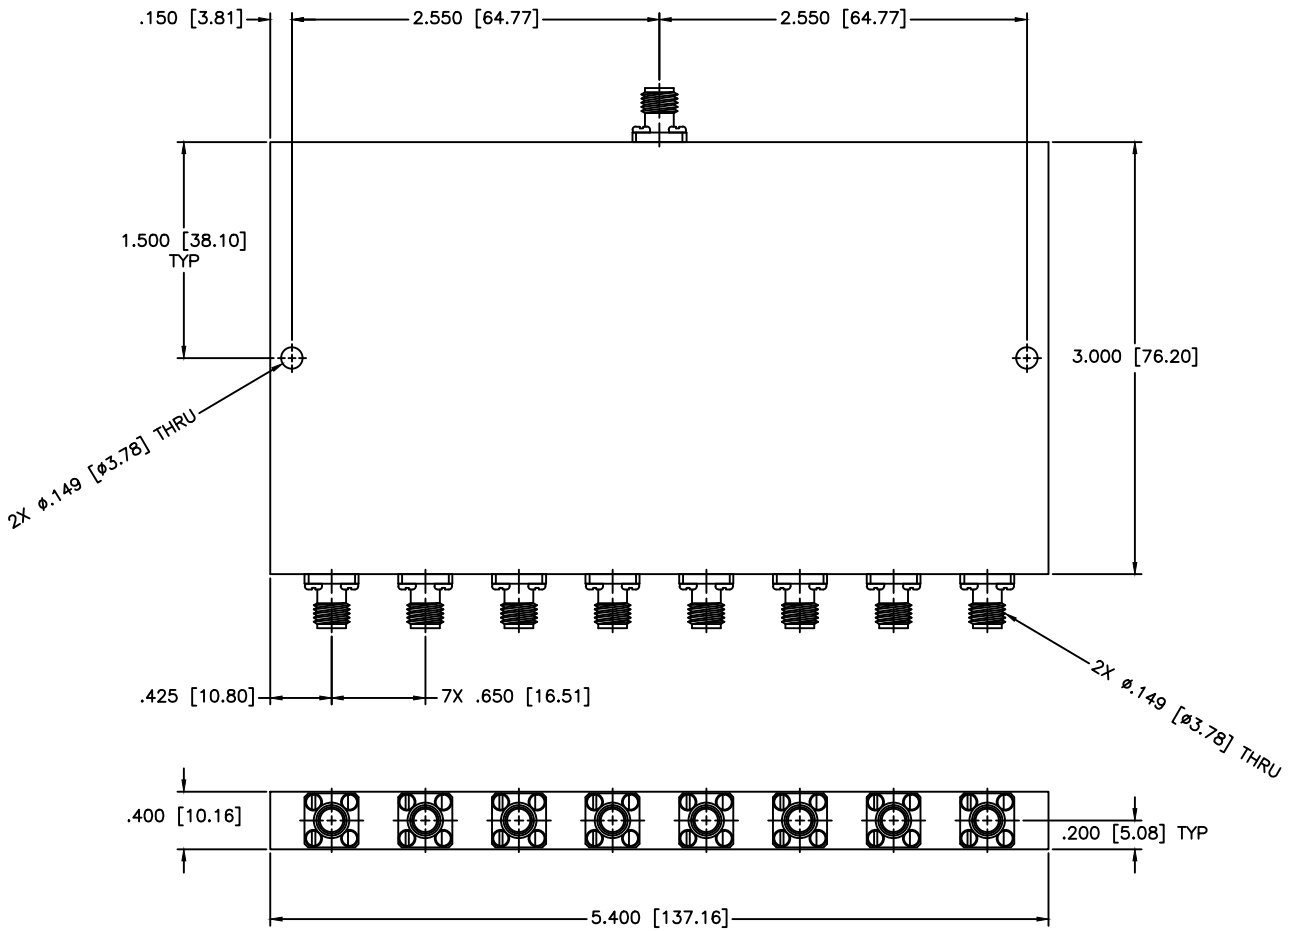

SPECIFICATIONS
 Frequency Range: 0.8–2.0 GHz
 Insertion Loss: 1.5dB Max.
 Isolation: 16dB Min.
 Amplitude Balance: ± 0.80 dB Max.
 Phase Balance: ± 4 Deg. Max.
 VSWR Input/Output: 1.35:1 Max./1.25:1 Max.
 Input Power: 30 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: 8-WAY POWER DIVIDER
		PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: PS8-130
DRAWN: Paiboon Luekhamhan	DATE: 04-04-2012	THIRD ANGLE PROJECTION	CAGE CODE: OD2L5
APPROVED: T. Nguyen	DATE: 04-04-2012		SIZE: N/A
			REV: N/A
			DWG NO.: 81924
DO NOT SCALE THE DRAWING			