


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

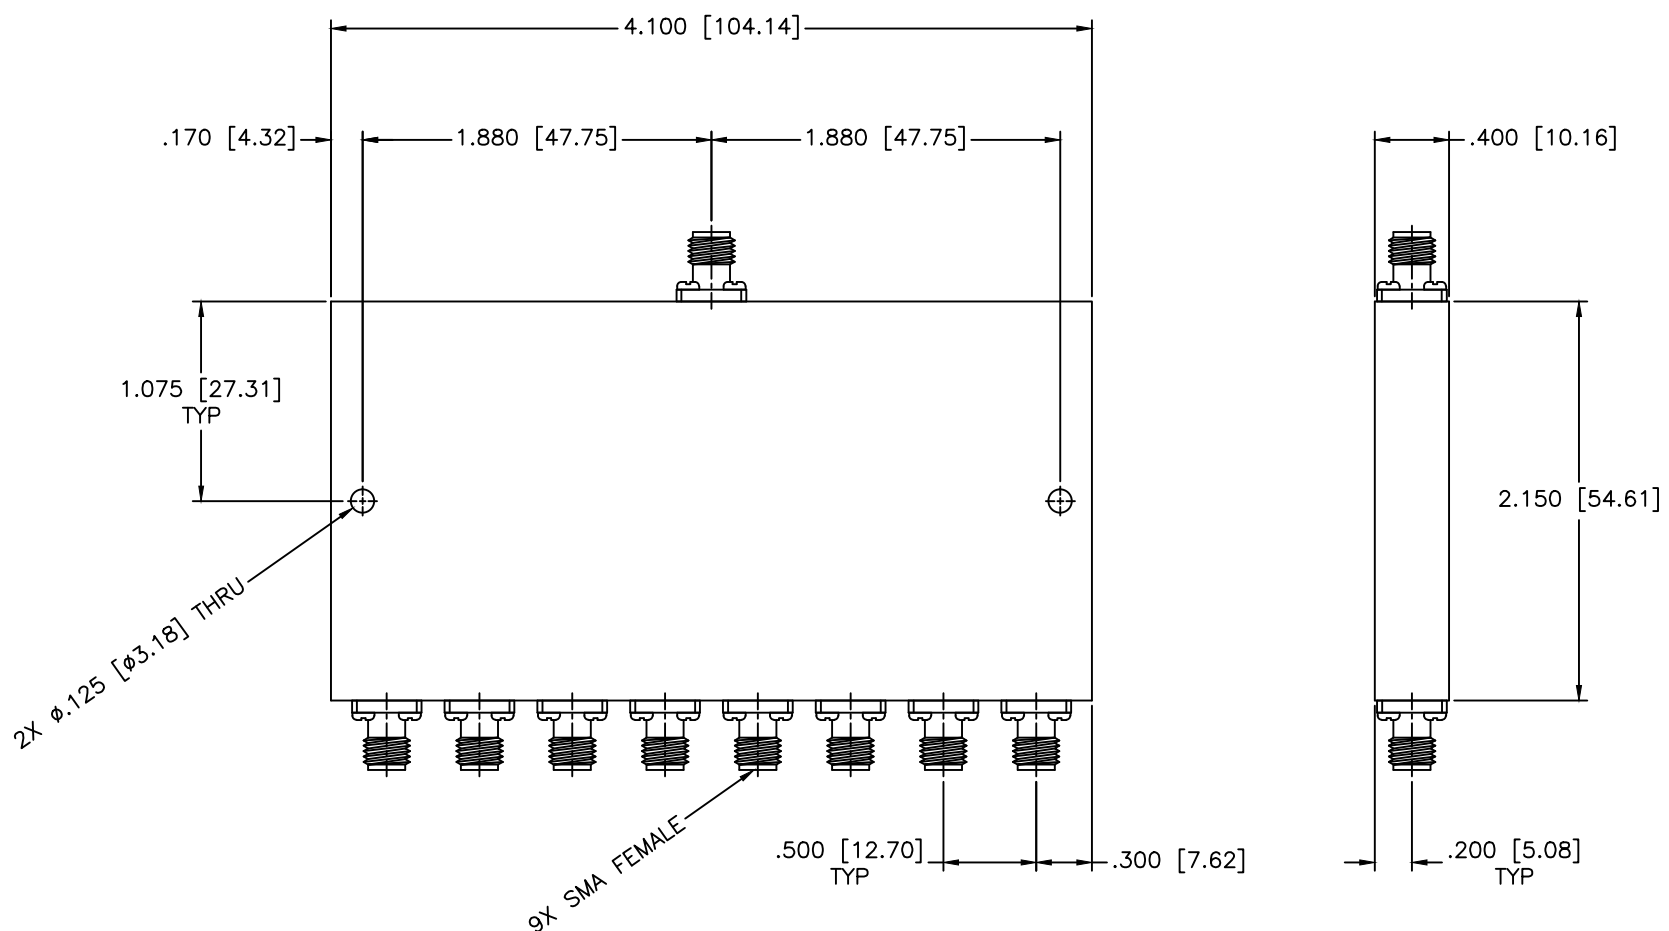

**SPECIFICATIONS**

- Frequency Range: 0.75–1.50 GHz
- Insertion Loss: 0.8dB Max.
- Isolation: 17dB Min.
- VSWR: 1.45:1 Max.
- Phase Balance: ±5 Deg. Max.
- Amplitude Balance: ±0.5dB Max.
- Power Rating: 30 Watts

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>8-WAY POWER DIVIDER</b>		
DRAWN: Paiboon Luekhamhan		PART NO. <b>PS8-131</b>		
DATE: 06-22-1999		CAGE CODE: <b>OD2L5</b>		
APPROVED: T. Nguyen		DATE: 06-22-1999		DWG NO. <b>81322</b>
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: N/A REV: N/A <b>DO NOT SCALE THE DRAWING</b>		
THIRD ANGLE PROJECTION 				