


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

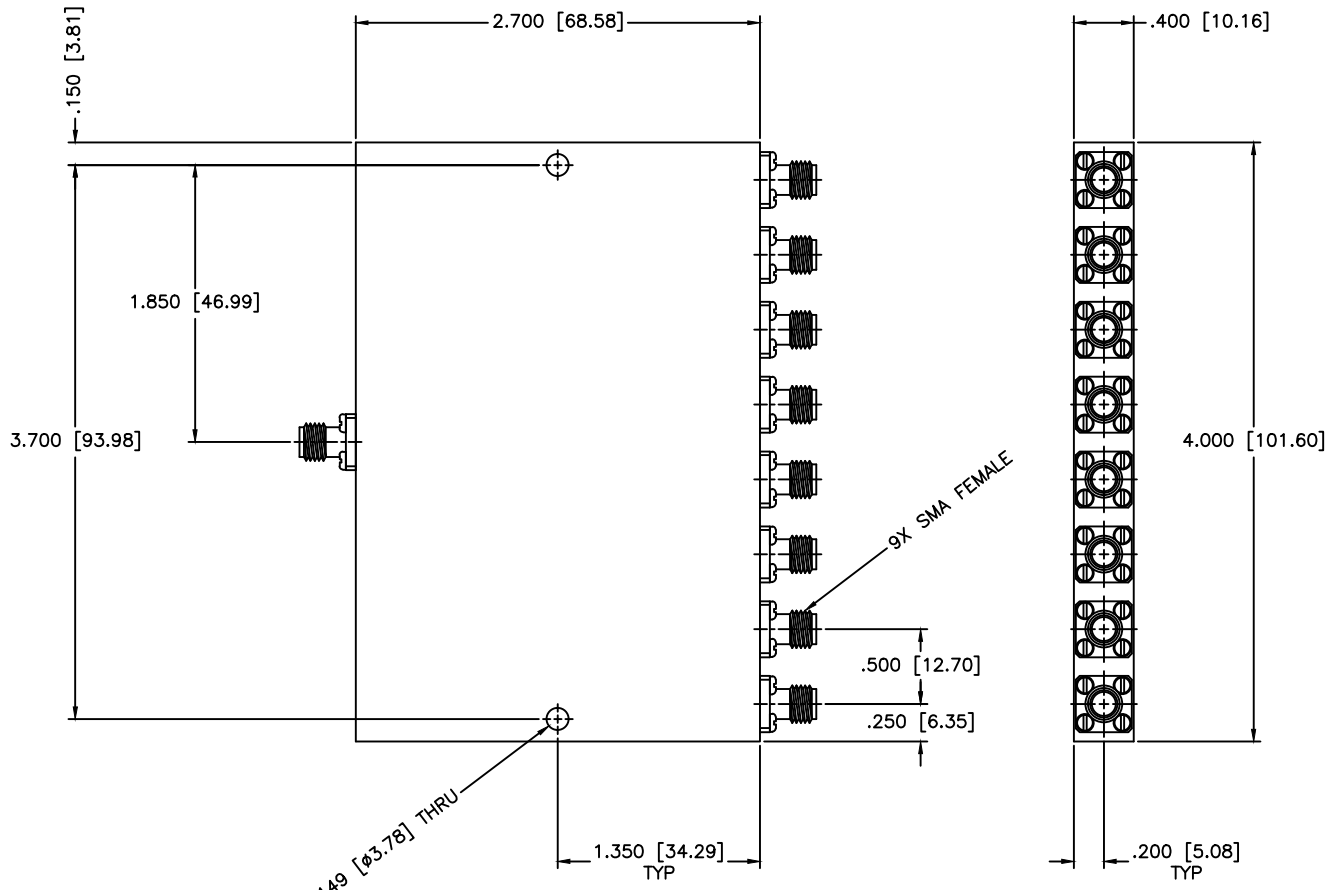

**SPECIFICATIONS**

Frequency Range: 0.8–1.5 GHz  
 Insertion Loss: 1.4dB Max.  
 Isolation: 17dB Min.  
 VSWR In/Out: 1.50:1/1.45:0 Max.  
 Phase Balance: ±10 Deg. Max.  
 Amplitude Balance: ±0.4dB Max.  
 Power Rating: 30 Watts

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: <b>8-WAY POWER DIVIDER</b>	
DRAWN: Paiboon Luekhamhan		DATE: 10-15-1998	PART NO. <b>PS8-134</b>	
APPROVED: T. Nguyen		DATE: 10-15-1998	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 86296
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DO NOT SCALE THE DRAWING	
		THIRD ANGLE PROJECTION		