


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

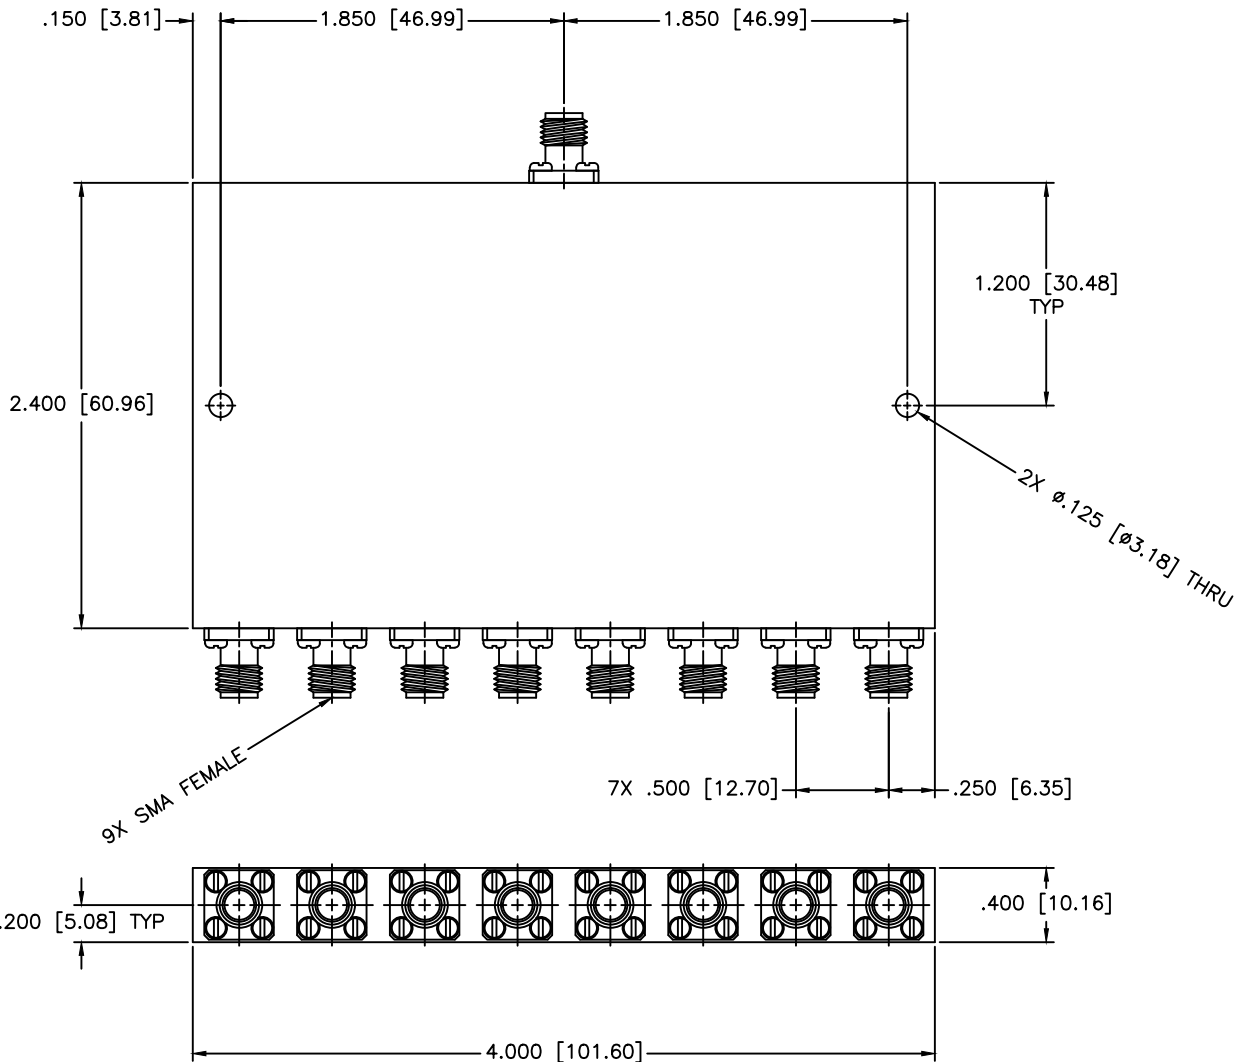

SPECIFICATIONS

Frequency Range: 8–26.5 GHz
 Insertion Loss: 3.2dB Max.
 Isolation: 15dB Min.
 VSWR: 1.75:1 Max.
 Phase Balance: ±8 Deg. Max.
 Amplitude Balance: ±0.8dB Max.
 Power Rating: 10W Avg, 1kW Peak
 Operating Temperature: –32°C to +85°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY POWER DIVIDER		
DRAWN: Paiboon Luexhamhan		PART NO. PS8-135		
DATE: 11-29-2011	DATE: 11-29-2011	CAGE CODE: OD2L5	SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 11-29-2011	DWG NO. 85975		DO NOT SCALE THE DRAWING

