


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

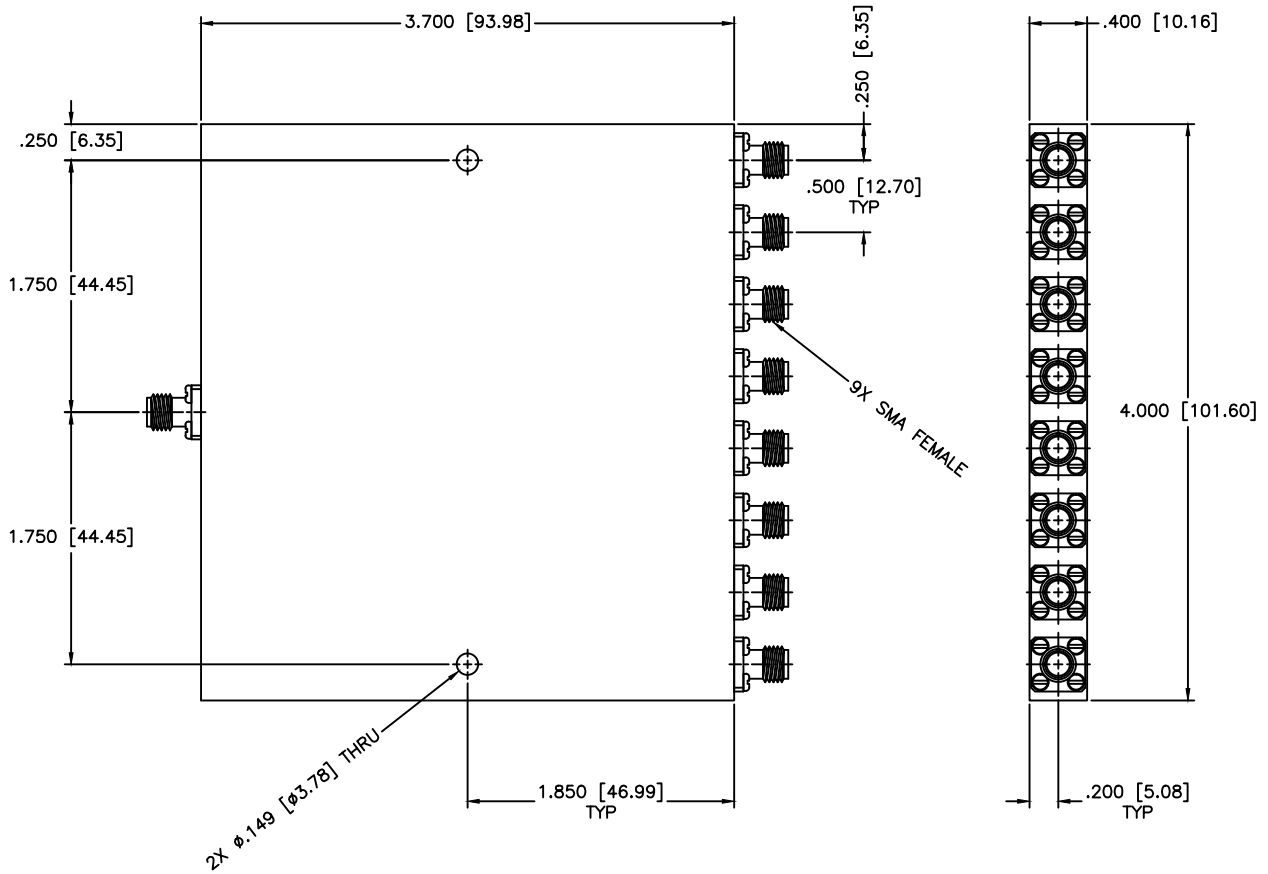

SPECIFICATIONS

Frequency Range: 2-18 GHz
 VSWR In/Out: 1.80:1/1.80:1 Max.
 Insertion Loss: 3.8dB Max.
 Isolation: 15dB Min.
 Phase Balance: ±18 Deg. Max.
 Amplitude Balance: ±0.8dB Max.
 Power Rating: 20W (Load vswr @ 1.2)

MATERIAL:	
/	
DRAWN: Paiboon Luekhamhan	DATE: 03-17-1999
APPROVED: T. Nguyen	DATE: 03-17-1999

MCLI	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: 8-WAY POWER DIVIDER		PART NO. PS8-13A	
CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO. 81213
DO NOT SCALE THE DRAWING			

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION