


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

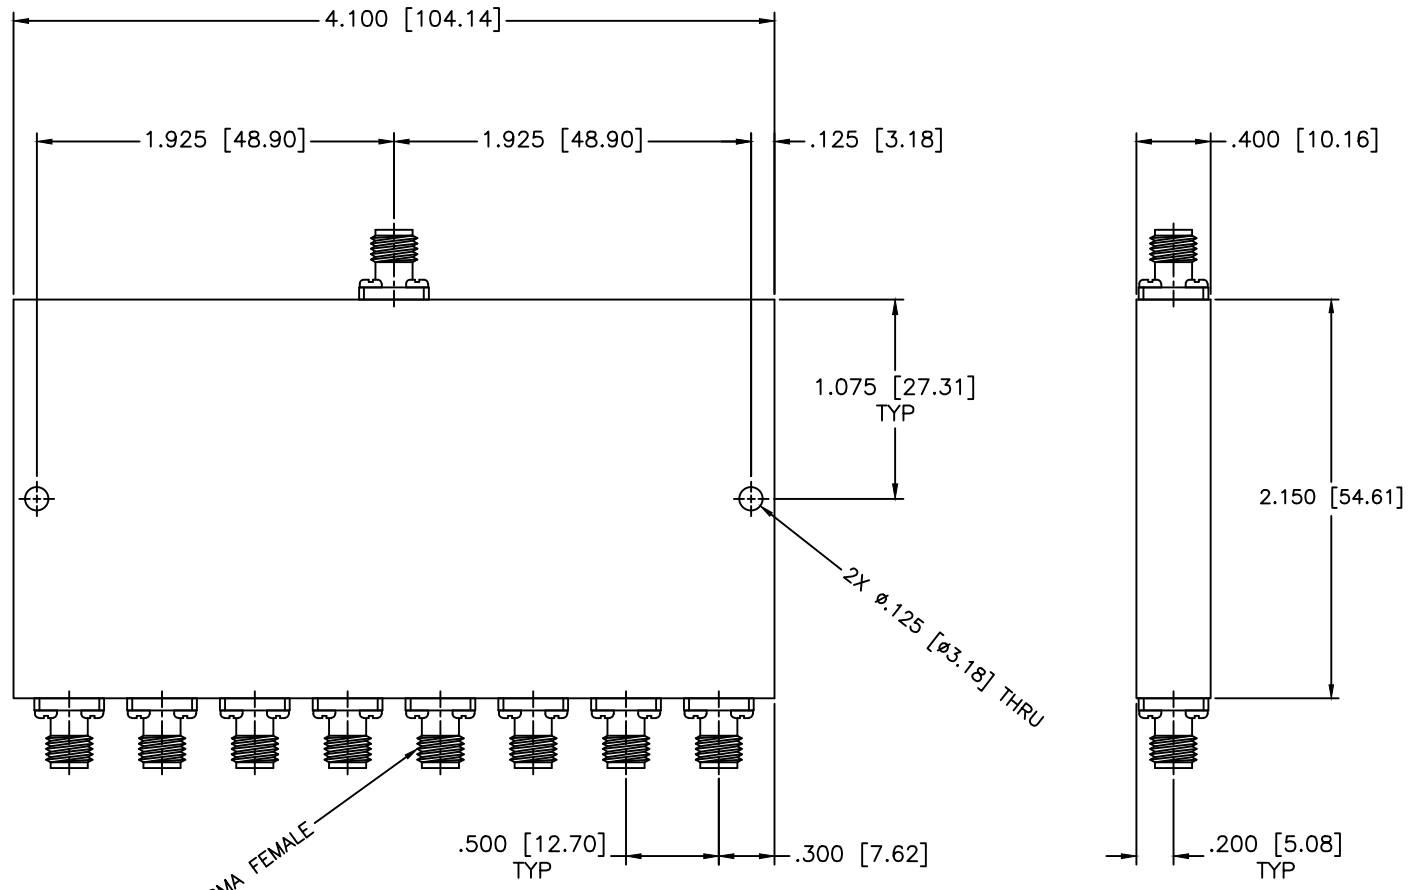

9X SMA FEMALE

2X ϕ .125 [ϕ 3.18] THRU

SPECIFICATIONS

Frequency Range: 0.8–2.4 GHz
 VSWR In/Out: 1.60:1/1.30:1 Max.
 Insertion Loss: 1.2dB Max.
 Isolation: 16dB Min.
 Phase Balance: ± 12 Deg. Max.
 Amplitude Balance: ± 0.6 dB Max.
 Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 03-07-1998
APPROVED: T. Nguyen	DATE: 03-07-1998

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
	SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: 8-WAY POWER DIVIDER
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS8-15
CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO. 80975
DO NOT SCALE THE DRAWING	

