


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

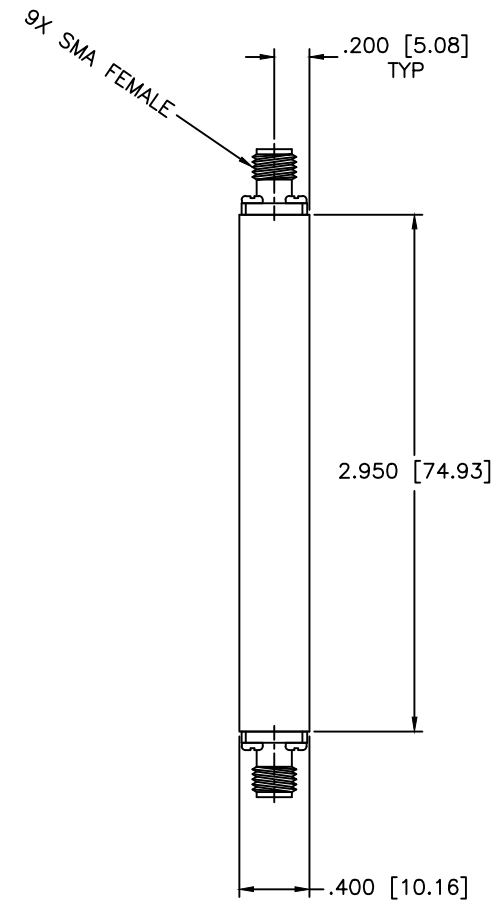

SPECIFICATIONS

- Frequency Range: 18–26.5 GHz
- Insertion Loss: 3.5dB Max.
- Isolation: 14dB Min.
- VSWR: 1.20:1 Max.
- Phase Balance: ±12 Deg. Max.
- Amplitude Balance: ±0.8dB Max.
- Power Rating: 2 Watts

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 09-07-1999
APPROVED: T. Nguyen	DATE: 09-07-1999



MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR (mm) (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE:
8-WAY POWER DIVIDER

PART NO.
PS8-157

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

CAGE CODE:	SIZE:	REV:	DWG NO.
OD2L5	N/A	N/A	81515
DO NOT SCALE THE DRAWING			