
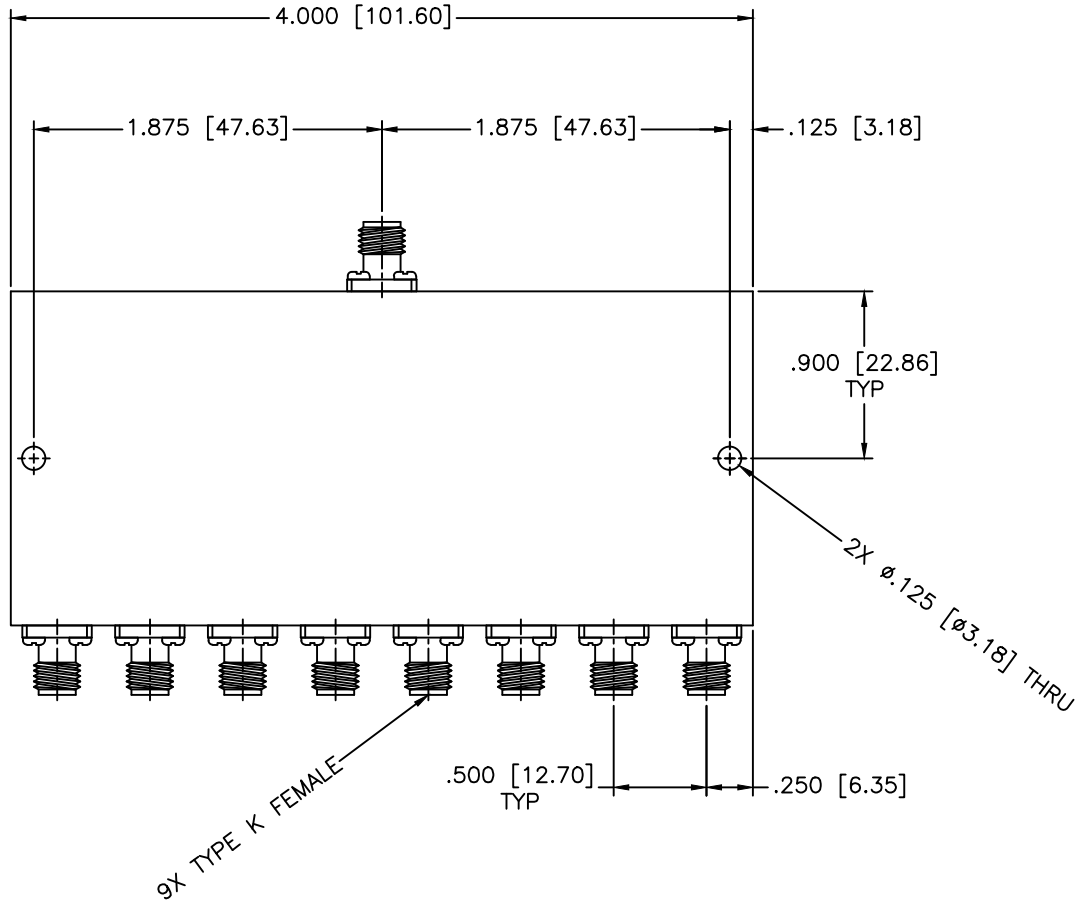


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

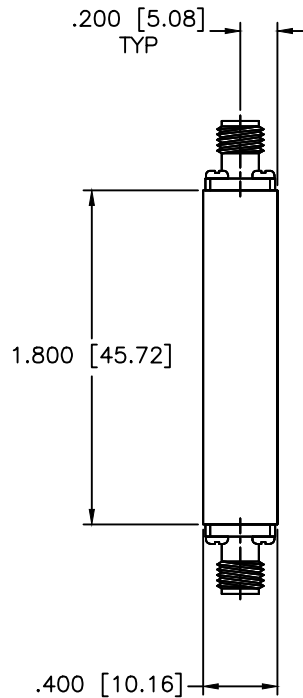

SPECIFICATIONS

- Frequency Range: 18–26.5 GHz
- Insertion Loss: 3.5dB Max.
- Isolation: 14dB Min.
- VSWR: 1.20:1 Max.
- Phase Balance: ±12 Deg. Max.
- Amplitude Balance: ±0.8dB Max.
- Power Rating: 10 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		PART NO.: PS8-157/KF	
DATE: 09-07-1999	DATE: 09-07-1999	CAGE CODE: OD2L5	SIZE: A
APPROVED: T. Nguyen	DATE: 09-07-1999	REV: A	DWG NO.: 85037
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		<small>DO NOT SCALE THE DRAWING</small>	