


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

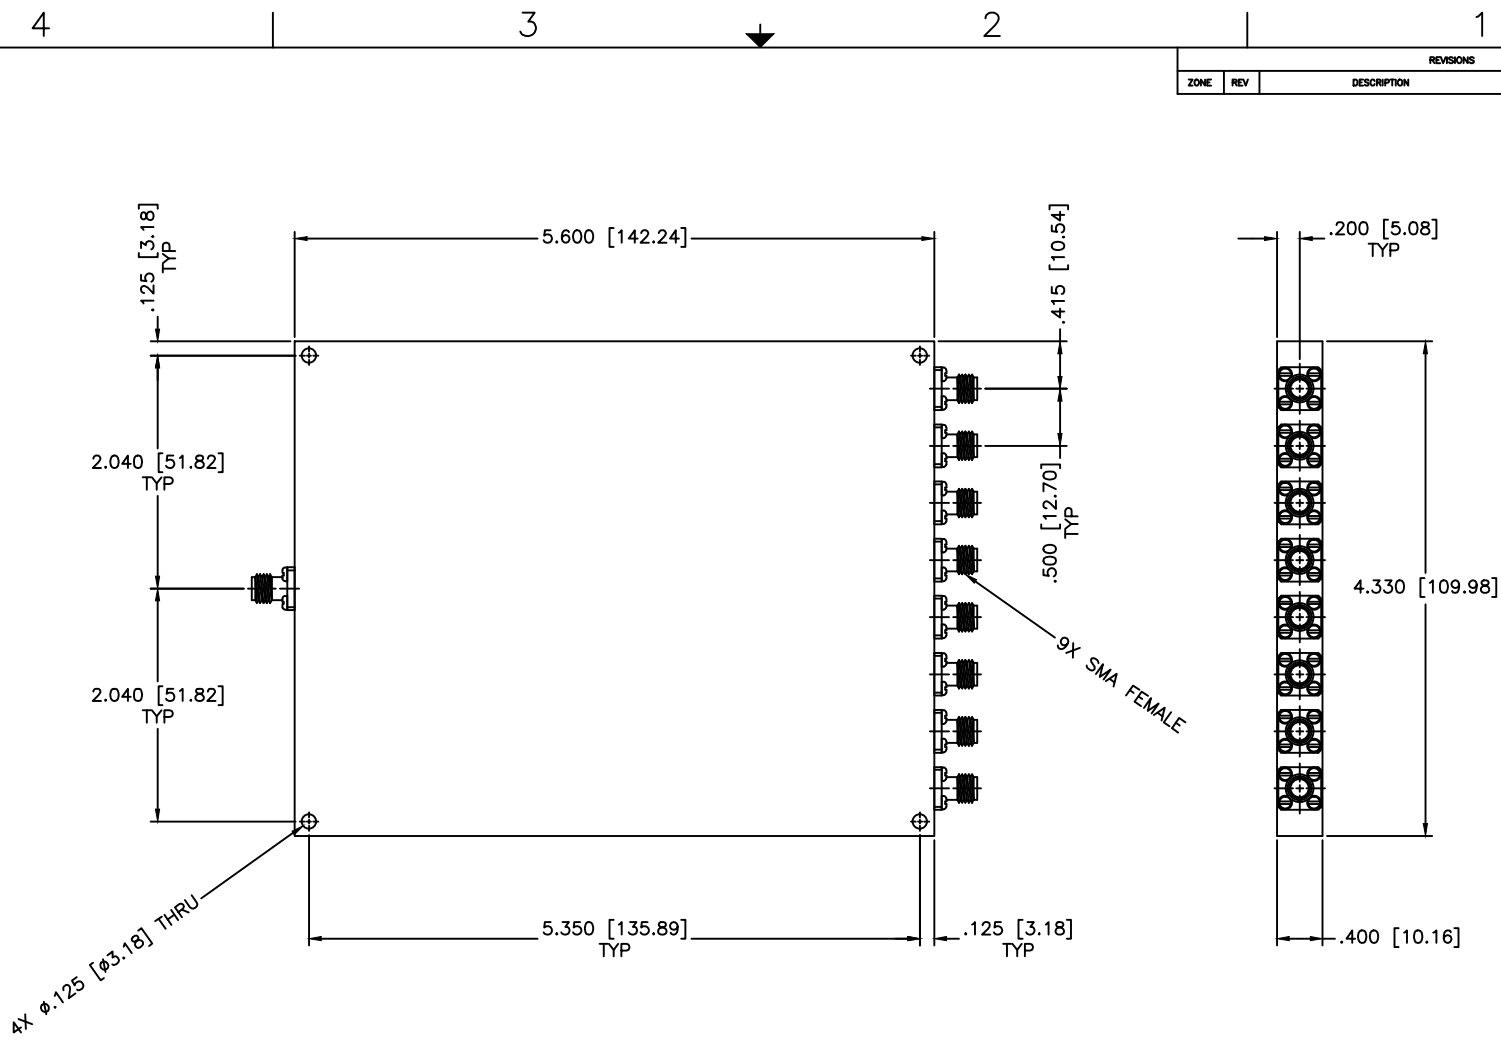

SPECIFICATIONS

Frequency Range: 0.5–1.5 GHz
 VSWR In/Out: 1.45:1/1.45:1 Max.
 Insertion Loss: 1.5dB Max.
 Isolation: 19dB Min.
 Phase Balance: ±8 Deg. Max.
 Amplitude Balance: ±0.8dB Max.
 Power Rating: 20W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.01 ± 0.005 ANGLE: ± 1/2°			DRAWING TITLE: 8-WAY POWER DIVIDER		SHEET: N/A
DRAWING: Paiboon Luekhamhan		DATE: 08-30-2002		PART NO.: PS8-176	
APPROVED: T. Nguyen		DATE: 08-30-2002		CAGE CODE: OD2L5	SIZE: C
THIRD ANGLE PROJECTION		REV: N/A		DWG. NO.: 81993	
DO NOT SCALE THE DRAWING					