
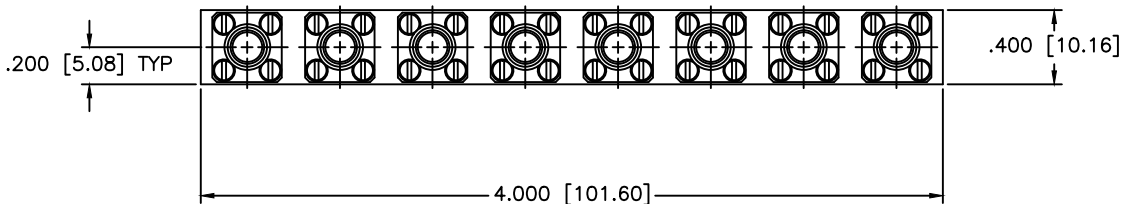


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

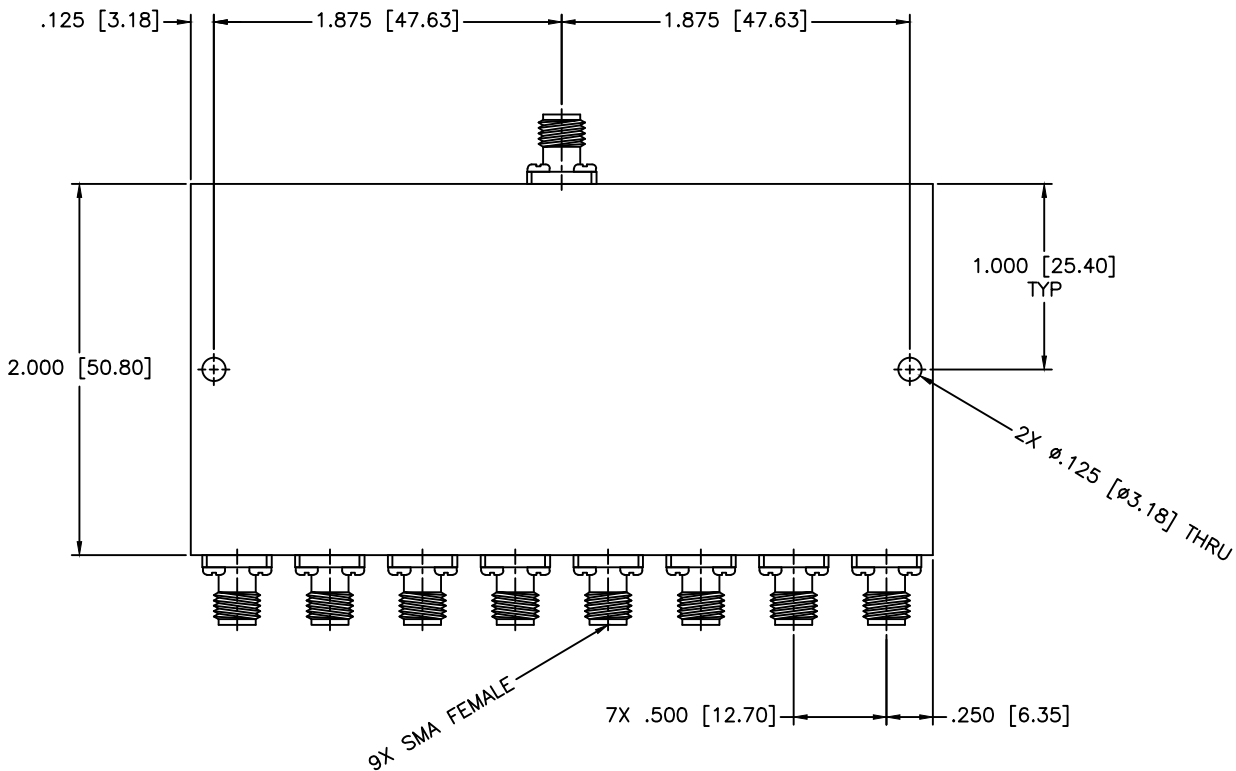

**SPECIFICATIONS**

Frequency Range: 15–17 GHz  
 Insertion Loss: 2.2dB Max.  
 Isolation: 18dB Min.  
 VSWR (In/Out): 1.80:1 Max./1.70:1 Max.  
 Phase Balance: ±15 Deg. Max.  
 Amplitude Balance: ±0.9dB Max.  
 Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		DATE: 03-17-2001	PART NO. PS8-177	
APPROVED: T. Nguyen		DATE: 03-17-2001	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 82283
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		
DO NOT SCALE THE DRAWING				