


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

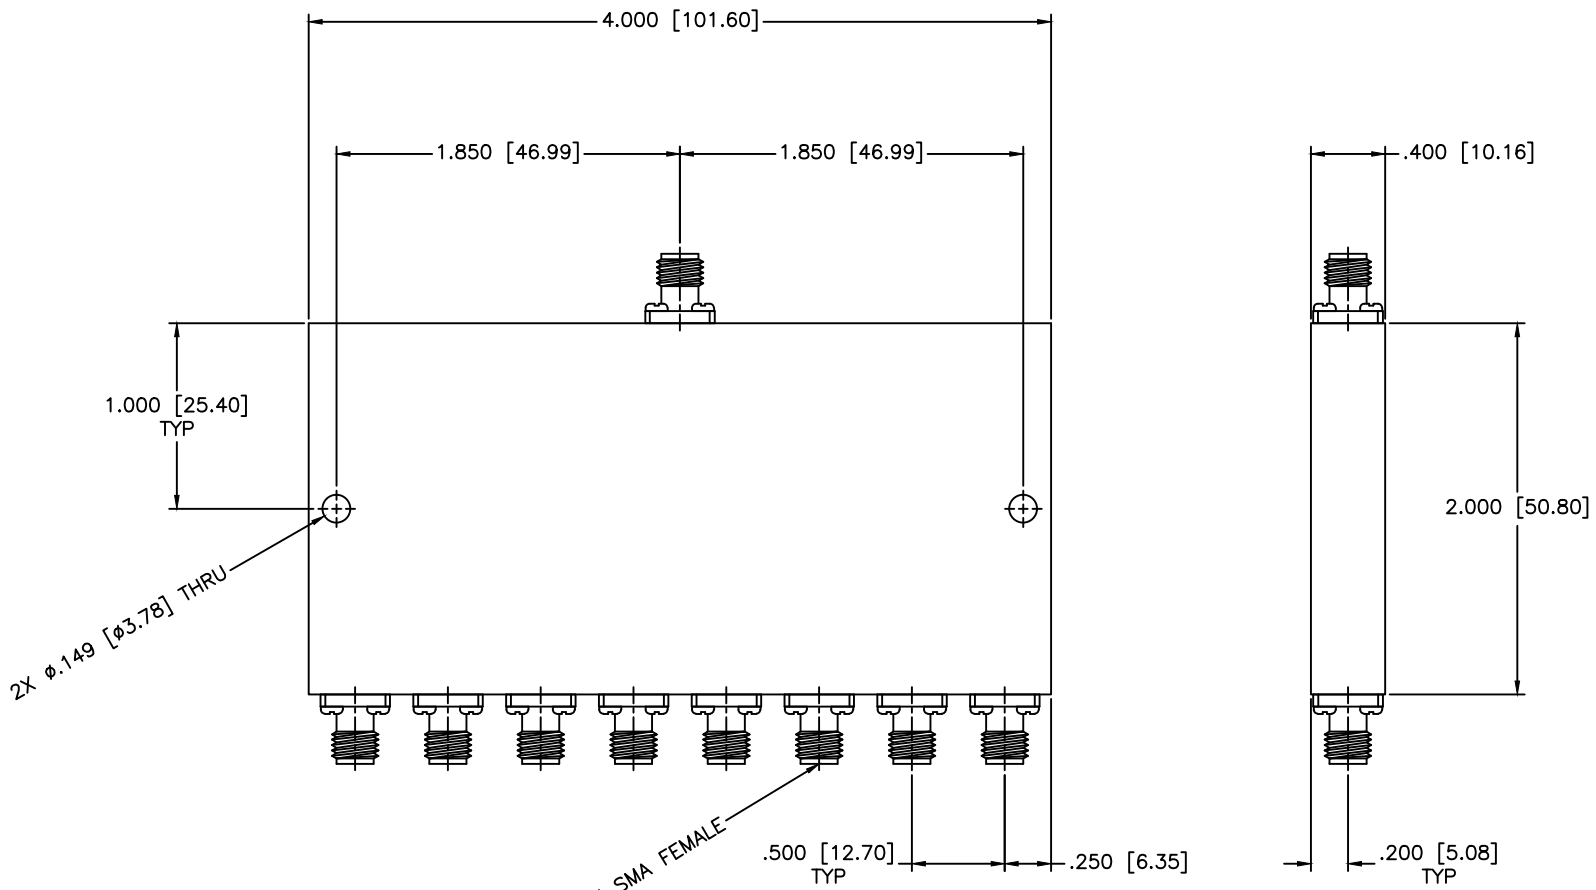

SPECIFICATIONS

- Frequency Range: 5.8–6.425 GHz
- VSWR In/Out: 1.35:1/1.20:1 Max.
- Insertion Loss: 0.9dB Max.
- Isolation: 18dB Min.
- Phase Balance: ±8 Deg. Max.
- Amplitude Balance: ±0.5dB Max.
- Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:	8-WAY POWER DIVIDER
DRAWN: Paiboon Luekhamhan DATE: 11-01-1997		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.:	PS8-20
APPROVED: T. Nguyen DATE: 11-01-1997		CAGE CODE: OD2L5 	SIZE: A REV: N/A DWG NO.: 80247	DO NOT SCALE THE DRAWING