


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

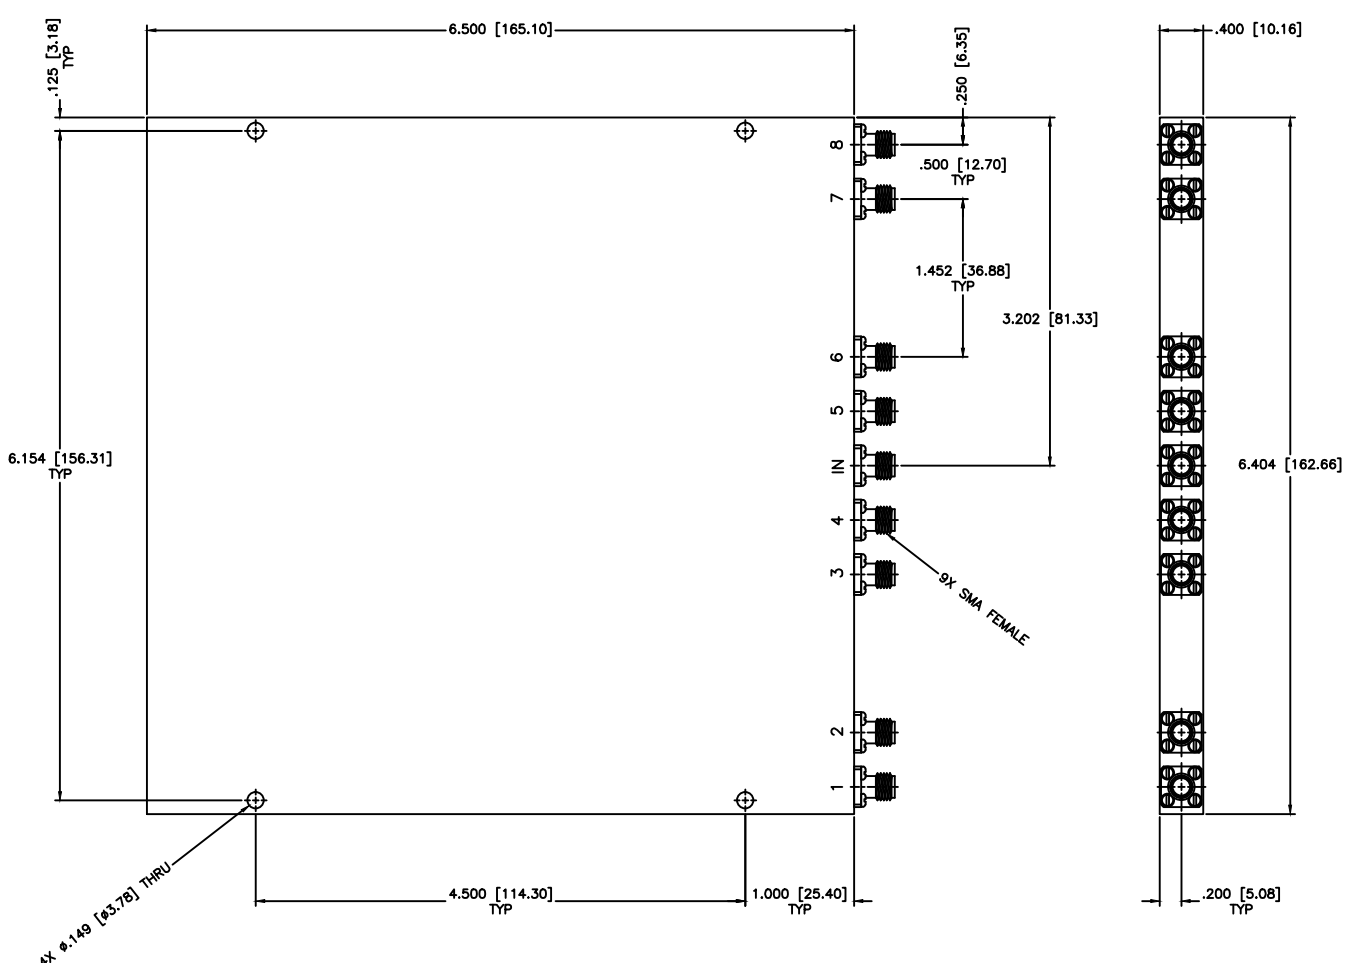

**SPECIFICATIONS**

Frequency Range: 6–15 GHz  
 VSWR In/Out: 1.60:1/1.45:1 Max.  
 Insertion Loss: 1.8dB Max.  
 Isolation: 16dB Min.  
 Phase Balance: ±14 Deg. Max.  
 Amplitude Balance: ±0.6dB Max.  
 Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWN: Paiboon Luekhamhan	DATE: 03-07-1998	DRAWING TITLE: 8-WAY POWER DIVIDER		
APPROVED: T. Nguyen	DATE: 03-07-1998	PART NO. PS8-21		
<small>PROPRIETARY INFO: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> 		CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 80977