


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

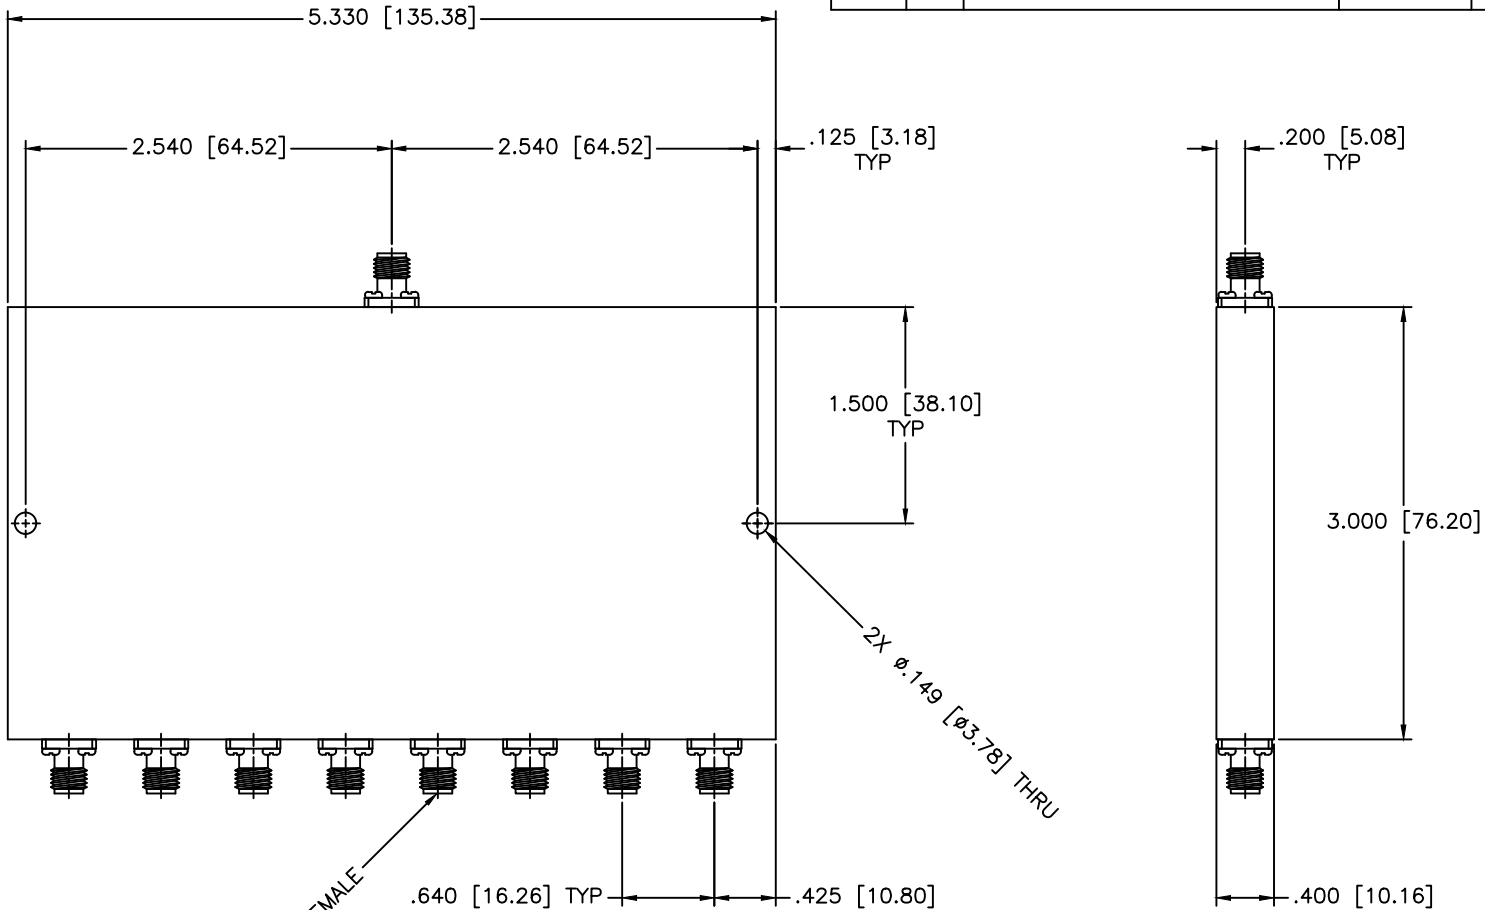

9X SMA FEMALE

**SPECIFICATIONS**

Frequency Range: 3.625–6.45 GHz  
 VSWR: 1.45:1/1.35:1 Max.  
 Insertion Loss: 1.3dB Max.  
 Isolation: 17dB Min.  
 Phase Balance: ±10 Deg. Max.  
 Amplitude Balance: ±0.4dB Max.  
 Power Rating: 30W (Load vswr@1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 03-07-1998
APPROVED: T. Nguyen	DATE: 03-07-1998

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: <b>8-WAY POWER DIVIDER</b>			
PART NO. <b>PS8-24</b>			
CAGE CODE: OD2L5	SIZE: C	REV: N/A	DWG NO. 81548
DO NOT SCALE THE DRAWING			

PROPRIETARY NOTICE:  
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY  
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN  
 PERMISSION FROM MICROWAVE COMMUNICATIONS  
 LABORATORIES INC. (MCLI)

