


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

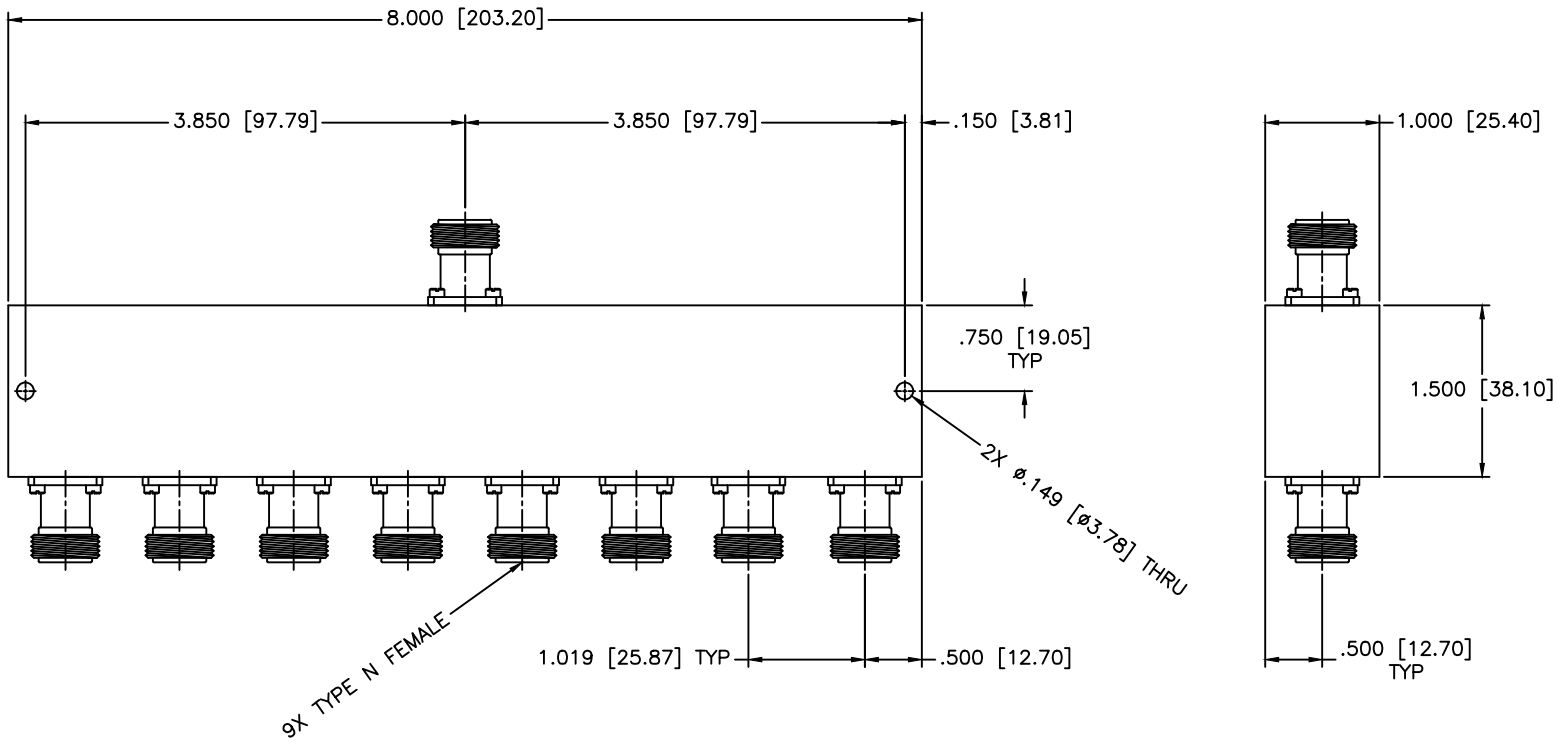

SPECIFICATIONS

Frequency Range: 14–14.5 GHz
 Input VSWR: 1.65:1/1.50:1 Max.
 Insertion Loss: 3.0dB Max.
 Isolation: 15dB Min.
 Phase Balance: ± 10 Deg. Max.
 Amplitude Balance: ± 0.7 dB Max.
 Power Rating: 30W (Load vswr @ 1.2)
 Operating Temperature: -55°C to $+85^{\circ}\text{C}$

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^{\circ}$			SHEET:	N/A
DRAWING TITLE:		8-WAY POWER DIVIDER		
PART NO.:		PS8-26/NF		
DRAWN:	DATE:	PROPERTY NOTICE:	CAGE CODE:	SIZE:
Pai boon Luekhamhan	06-25-1999	THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	OD2L5	N/A
APPROVED:	DATE:	THIRD ANGLE PROJECTION	REV:	DWG NO.:
T. Nguyen	06-25-1999		N/A	81503
DO NOT SCALE THE DRAWING				