


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

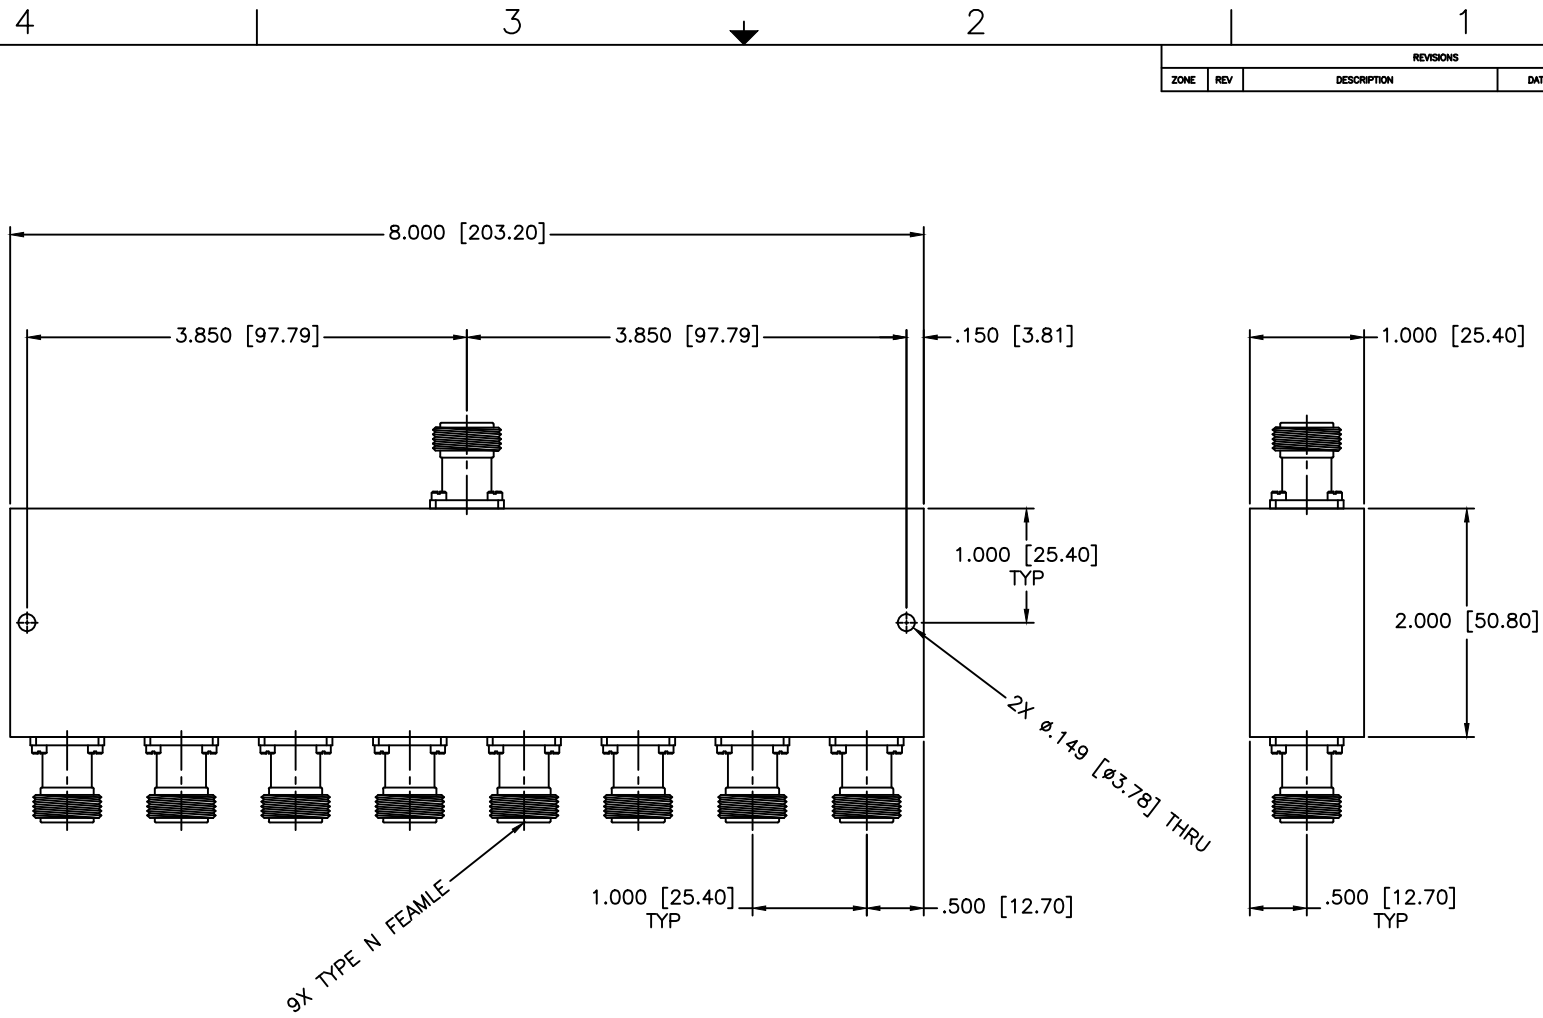

SPECIFICATIONS

Frequency Range: 10.9–12.75 GHz
 Input VSWR: 1.65:1/1.50:1 Max.
 Insertion Loss: 3.0dB Max.
 Isolation: 15dB Min.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: ±0.7dB Max.
 Power Rating: 30 Watts (Load vswr @ 1.2)
 Operating Temperature: -55°C to +85°C

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWING TITLE:		8-WAY POWER DIVIDER		
PART NO.:		PS8-27/NF		
DRAWN:	DATE:	PROPERTY NOTICE:	CAGE CODE:	SIZE:
Paiboon Luekhamhan	03-07-1998	THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	OD2L5	N/A
APPROVED:	DATE:	THIRD ANGLE PROJECTION	REV:	DWG NO.:
T. Nguyen	03-07-1998		N/A	81504
DO NOT SCALE THE DRAWING				