


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

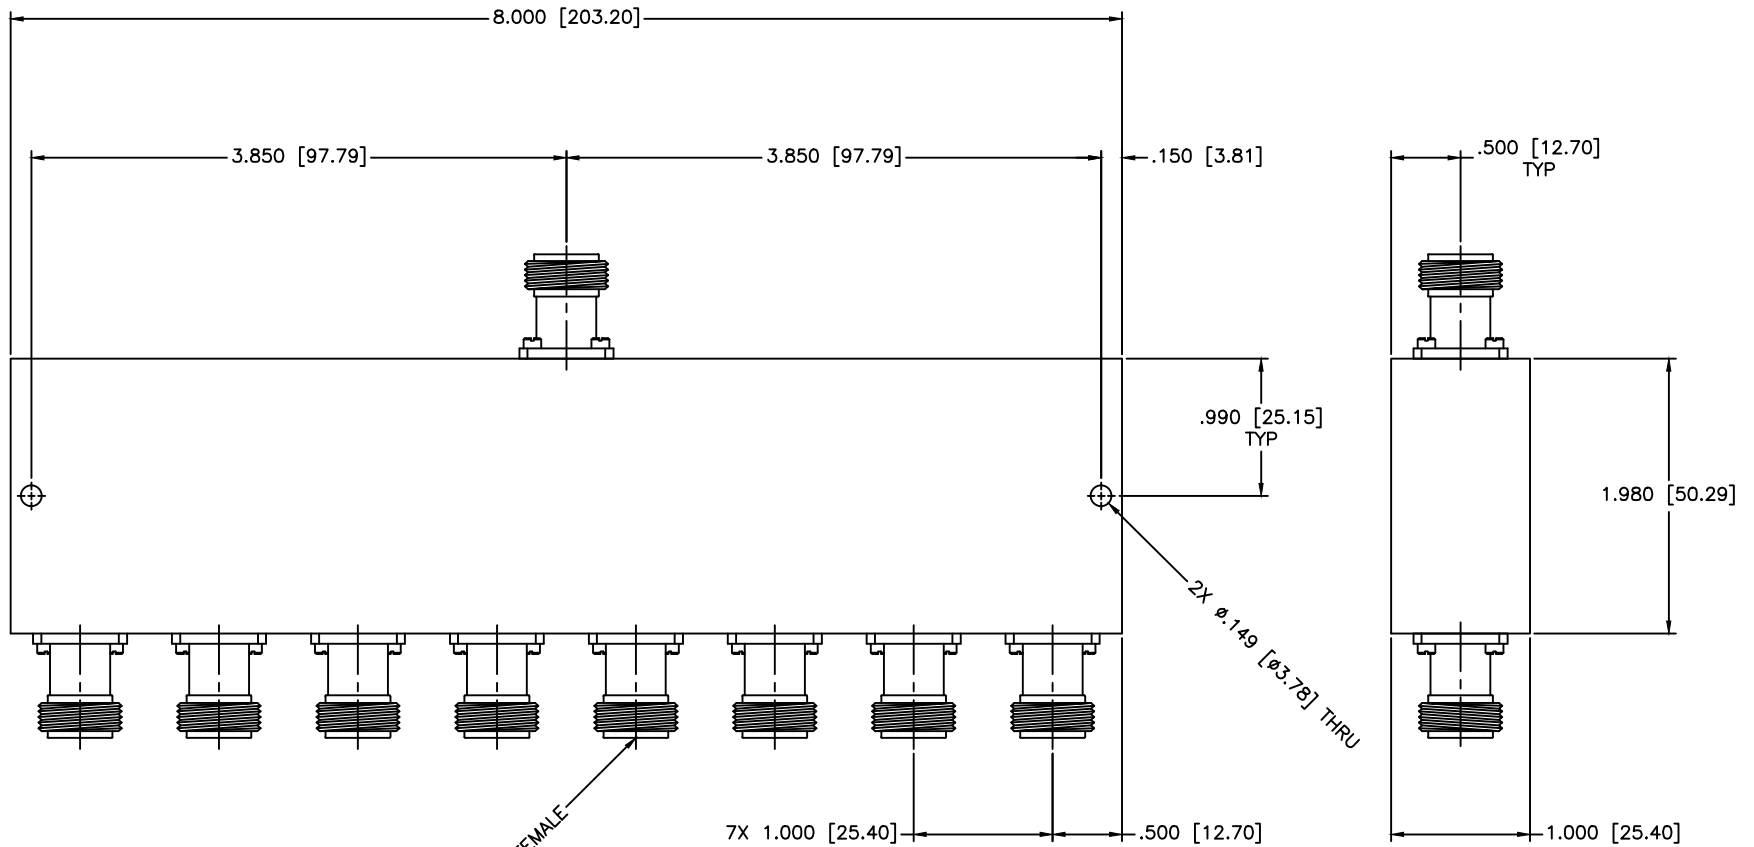

**SPECIFICATIONS**

Frequency Range: 0.9–1.3 GHz  
 Input VSWR: 1.40:1/1.35:1 Max.  
 Insertion Loss: 1.0dB Max.  
 Isolation: 18dB Min.  
 Phase Balance: ±10 Deg. Max.  
 Amplitude Balance: ±0.5dB Max.  
 Power Rating: 30 Watts (Load vswr @ 1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 06-25-1999
APPROVED: T. Nguyen	DATE: 06-25-1999

**MCLI** MICROWAVE COMMUNICATIONS LABORATORIES INC.  
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710  
 TEL: (727) 344-6254 FAX: (727) 381-6116  
 http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:  
 TOLERANCES  
 IN (INCHES) OR [mm] (MILLIMETERS)  
 FRACTIONS: ± 1/64  
 DECIMALS: ±.01 ±.005  
 ANGLE: ±1/2°

THIRD ANGLE PROJECTION

SCALE:	N/A		
SHEET:	N/A		
DRAWING TITLE:	8-WAY RF POWER DIVIDERS		
PART NO.:	PS8-2/NF		
CAGE CODE:	SIZE:	REV:	DWG. NO.:
OD2L5	N/A	N/A	80261
DO NOT SCALE THE DRAWING			