


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

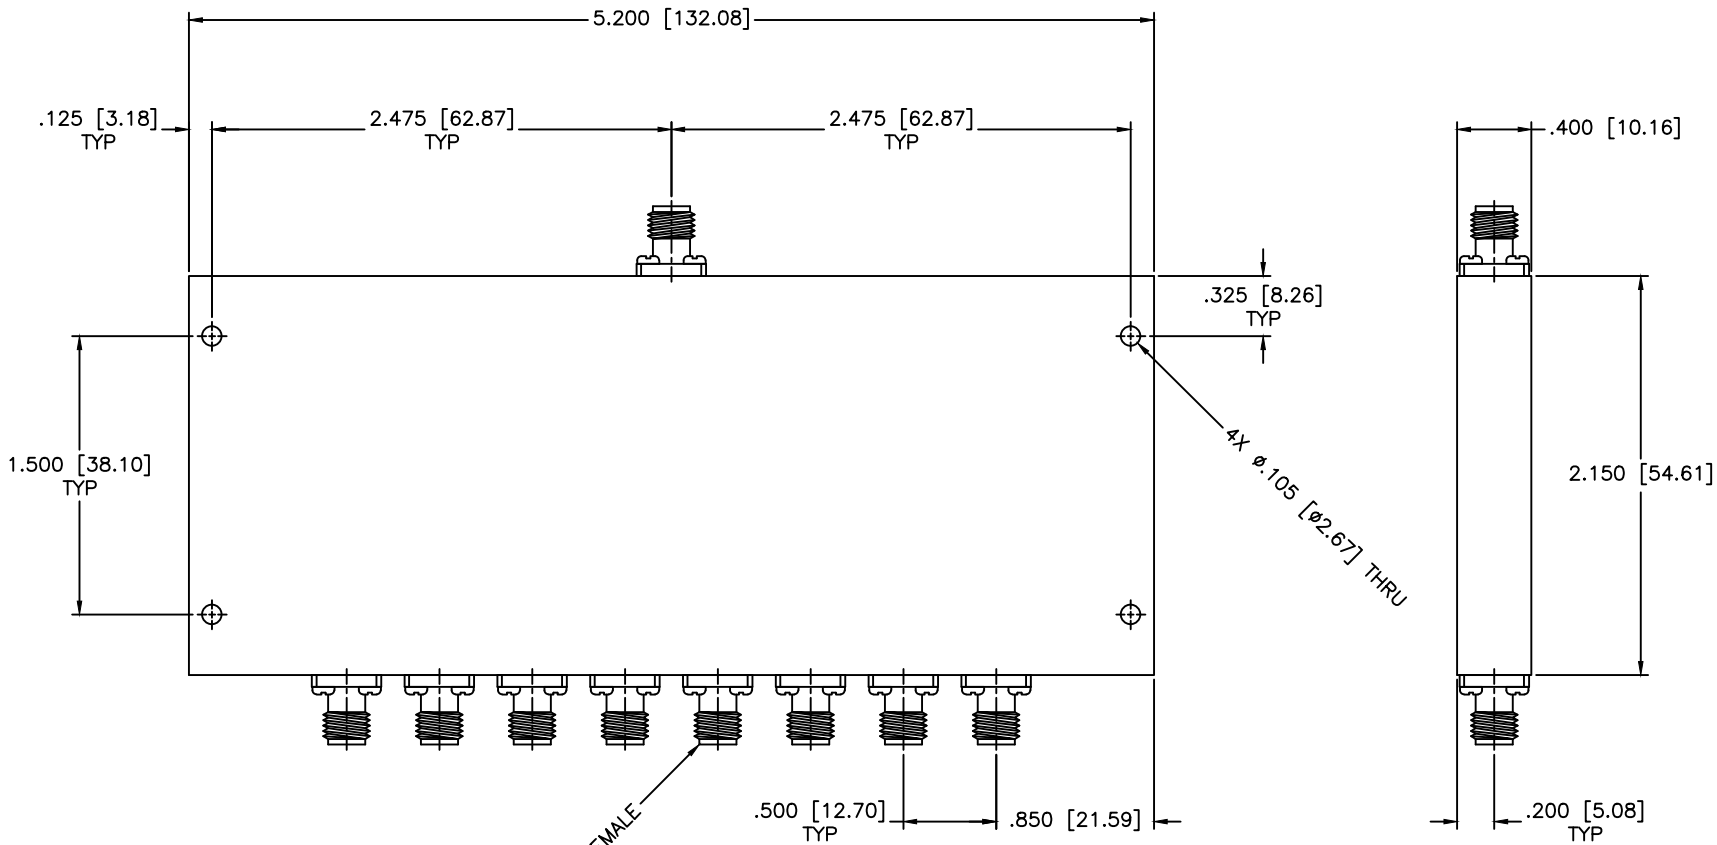

SPECIFICATIONS

- Frequency Range: 1–2 GHz
- VSWR In/Out: 1.45:1/1.35:1 Max.
- Insertion Loss: 0.9dB Max.
- Isolation: 18dB Min.
- Phase Balance: ± 8 Deg. Max.
- Amplitude Balance: ± 0.4 dB Max.
- Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 8-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		PART NO.: PS8-3-S	
DATE: 06-22-1999		CAGE CODE: OD2L5	SIZE: A
APPROVED: T. Nguyen		DATE: 06-22-1999	REV: N/A
THIRD ANGLE PROJECTION		DWG NO.: 81488	
		DO NOT SCALE THE DRAWING	