


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

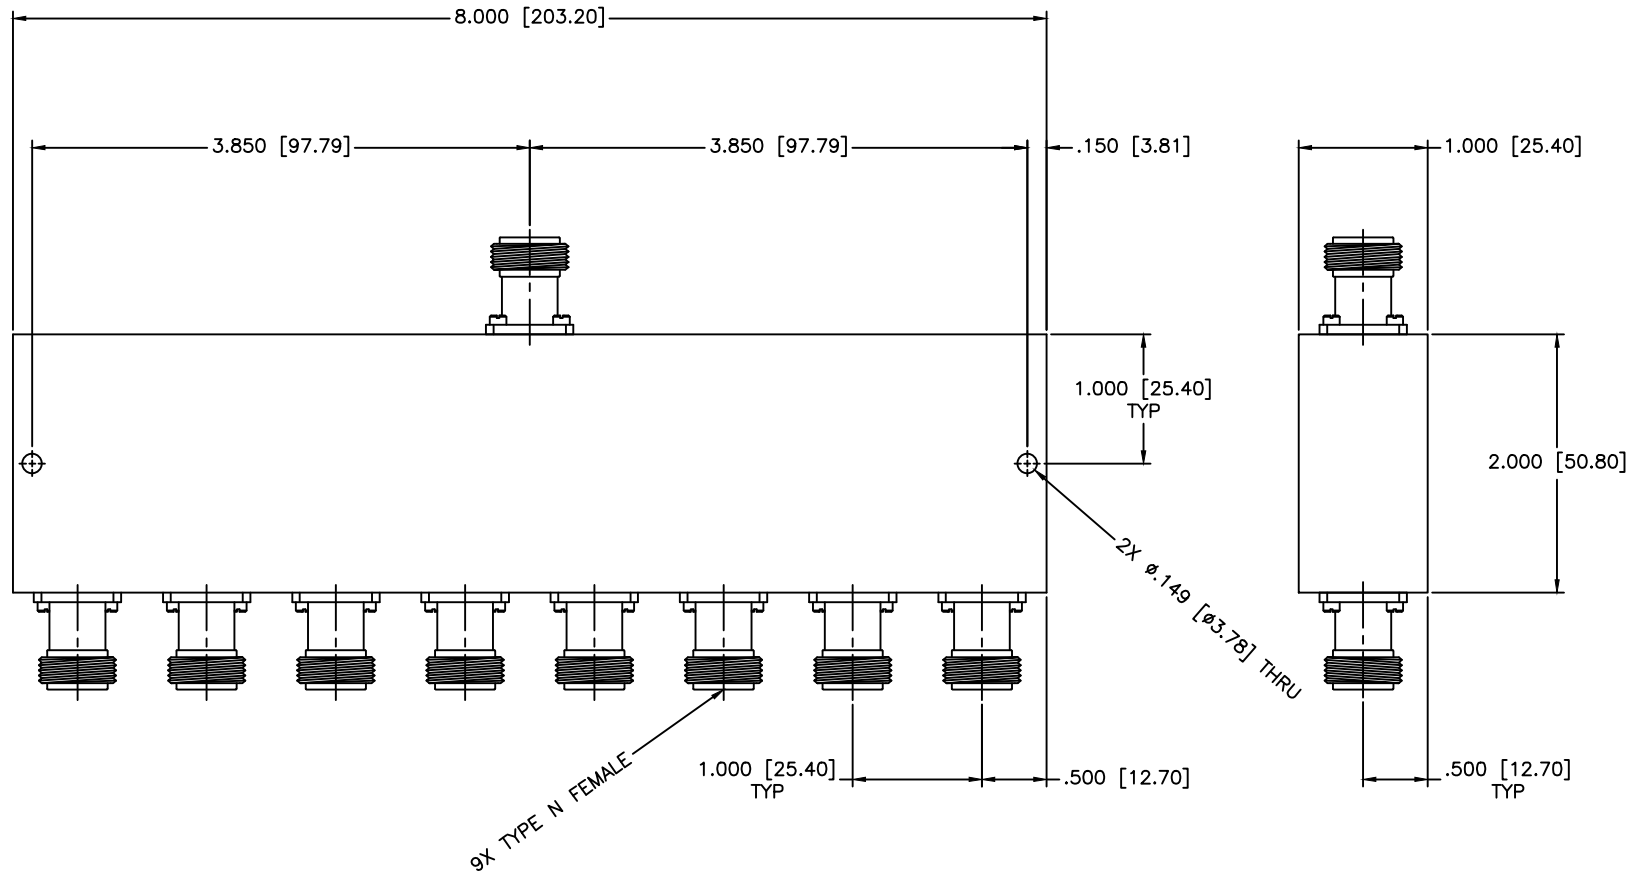

SPECIFICATIONS

Frequency Range: 2-4 GHz
 Input VSWR: 1.50:1/1.40:1 Max.
 Insertion Loss: 0.9dB Max.
 Isolation: 17dB Min.
 Phase Balance: ±5 Deg. Max.
 Amplitude Balance: ±0.5dB Max.
 Power Rating: 30 Watts (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY RF POWER DIVIDERS		
DRAWN: Paiboon Luekhamhan		PART NO.: PS8-4/NF		
DATE: 06-25-1999		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		SIZE: N/A		
DATE: 06-25-1999		REV: N/A		
THIRD ANGLE PROJECTION		DWG NO.: 80263		
		DO NOT SCALE THE DRAWING		