


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

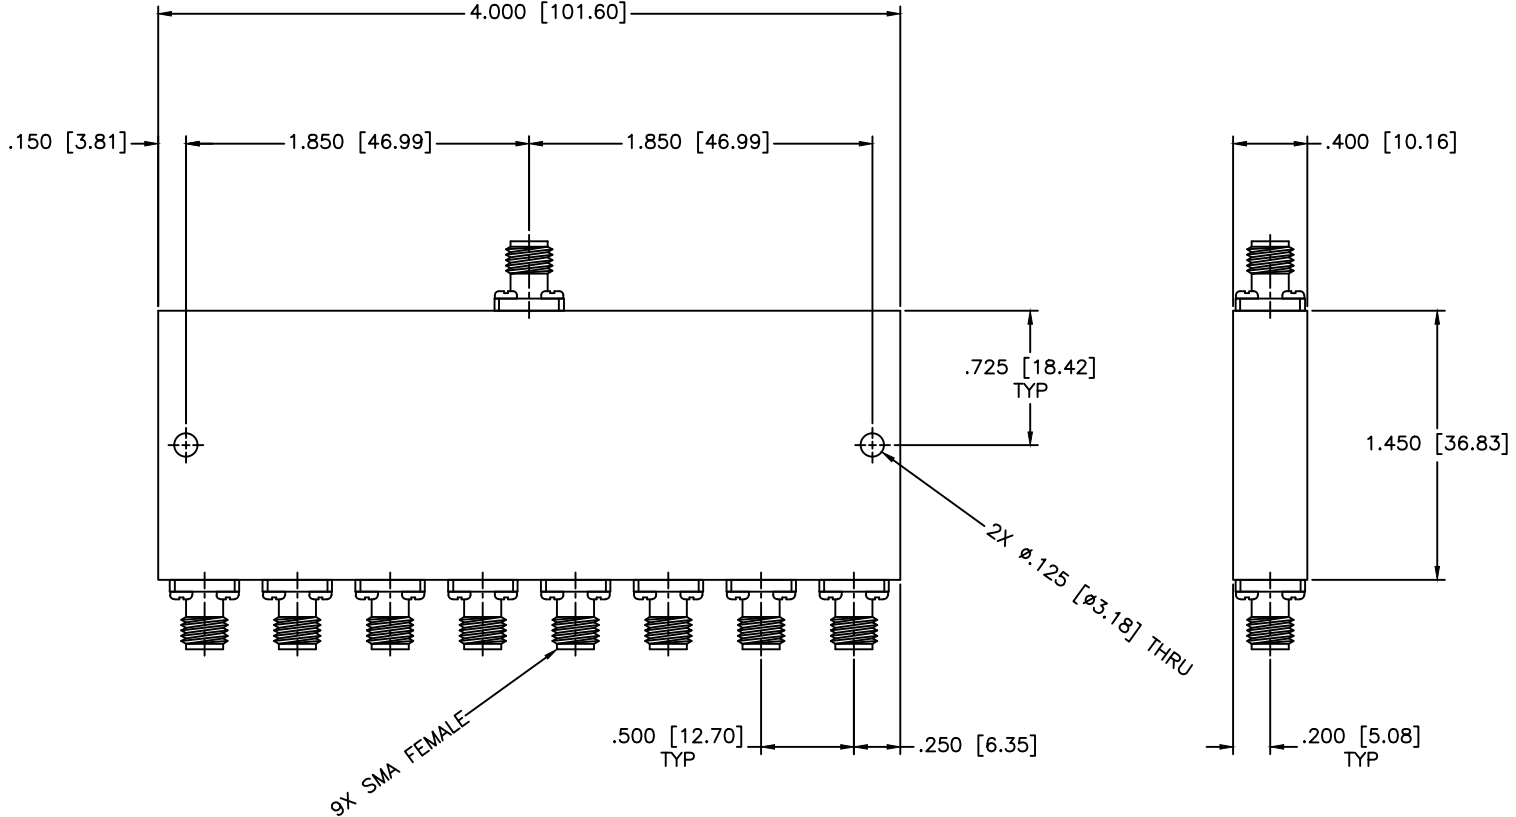

9X SMA FEMALE

**SPECIFICATIONS**

Frequency Range: 3–4.2 GHz  
 Insertion Loss: 1.2dB Max.  
 Isolation: 18dB Min.  
 Power Rating: 30 Watts  
 Amplitude Balance: ±0.4dB  
 VSWR IN/OUT: 1.45:1/1.35:1 Max.  
 Phase Balance: ±8 Deg.

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: <b>8-WAY POWER DIVIDER</b>	
DRAWN: Paiboon Luekhamhan		DATE: 02-05-2002	PART NO. <b>PS8-5</b>	
APPROVED: T. Nguyen		DATE: 02-05-2002	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 80245
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DO NOT SCALE THE DRAWING	
		THIRD ANGLE PROJECTION		

