


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

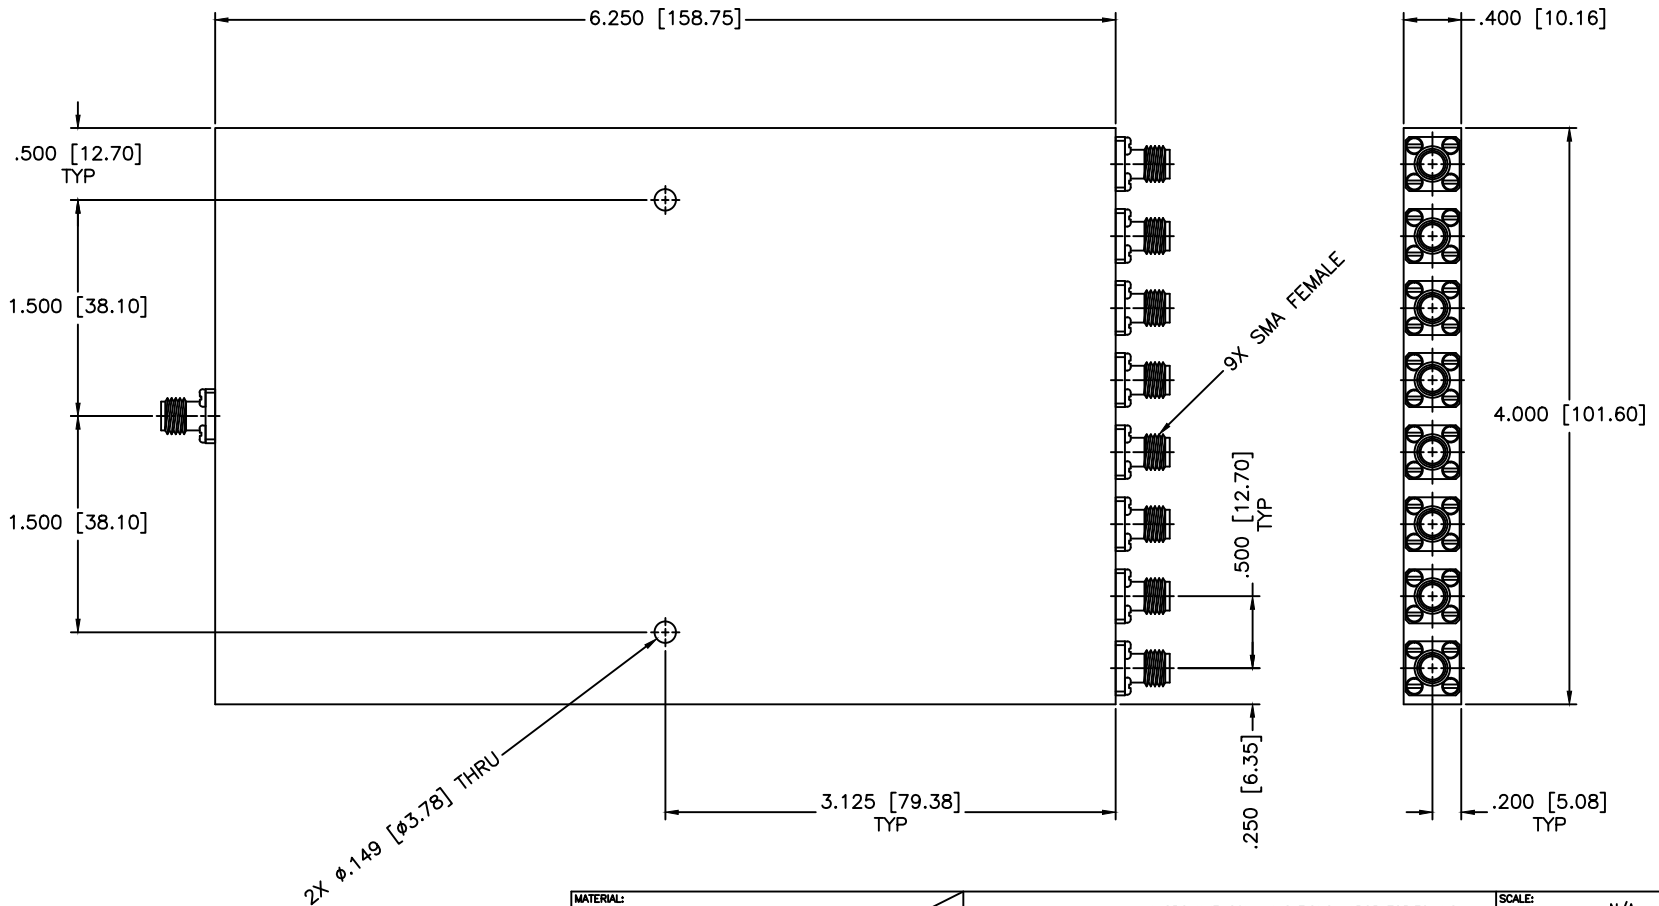

**SPECIFICATIONS**

Frequency Range: 0.45–1.0 GHz  
 VSWR In/Out: 1.35:1/1.30:1 Max.  
 Insertion Loss: 0.8dB Max.  
 Isolation: 18dB Min.  
 Phase Balance: ±8 Deg. Max.  
 Amplitude Balance: ±0.4dB Max.  
 Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>8-WAY POWER DIVIDER</b>		
DRAWN: Paiboon Luekhamhan		PART NO.: PS8-55		
DATE: 04-06-2000		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 04-06-2000		
THIRD ANGLE PROJECTION		SIZE: N/A		
		REV: N/A		
		DWG NO.: 81980		
DO NOT SCALE THE DRAWING				