


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

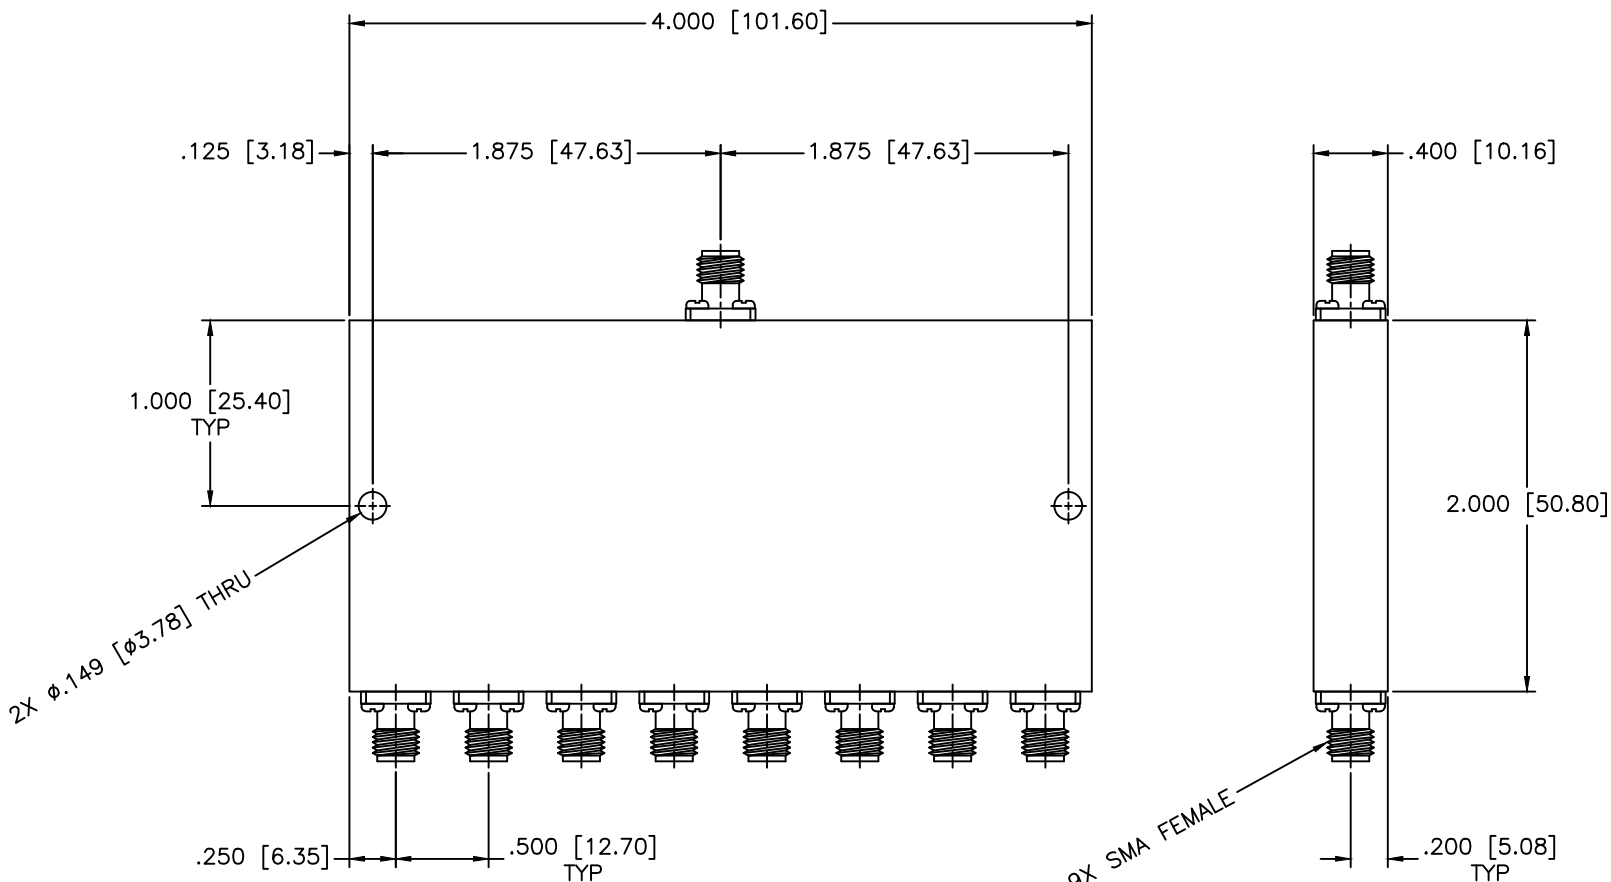

SPECIFICATIONS

Frequency Range: 6–12 GHz
 VSWR In/Out: 1.70:1/1.50:1 Max.
 Insertion Loss: 1.6dB Max.
 Isolation: 17dB Min.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: ±0.5dB Max.
 Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	07-07-1998
APPROVED:	DATE:
T. Nguyen	07-07-1998

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	8-WAY POWER DIVIDER
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. PS8-58		
CAGE CODE:	SIZE:	REV:	DWG NO.	
OD2L5	A	N/A	81078	
DO NOT SCALE THE DRAWING				