


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

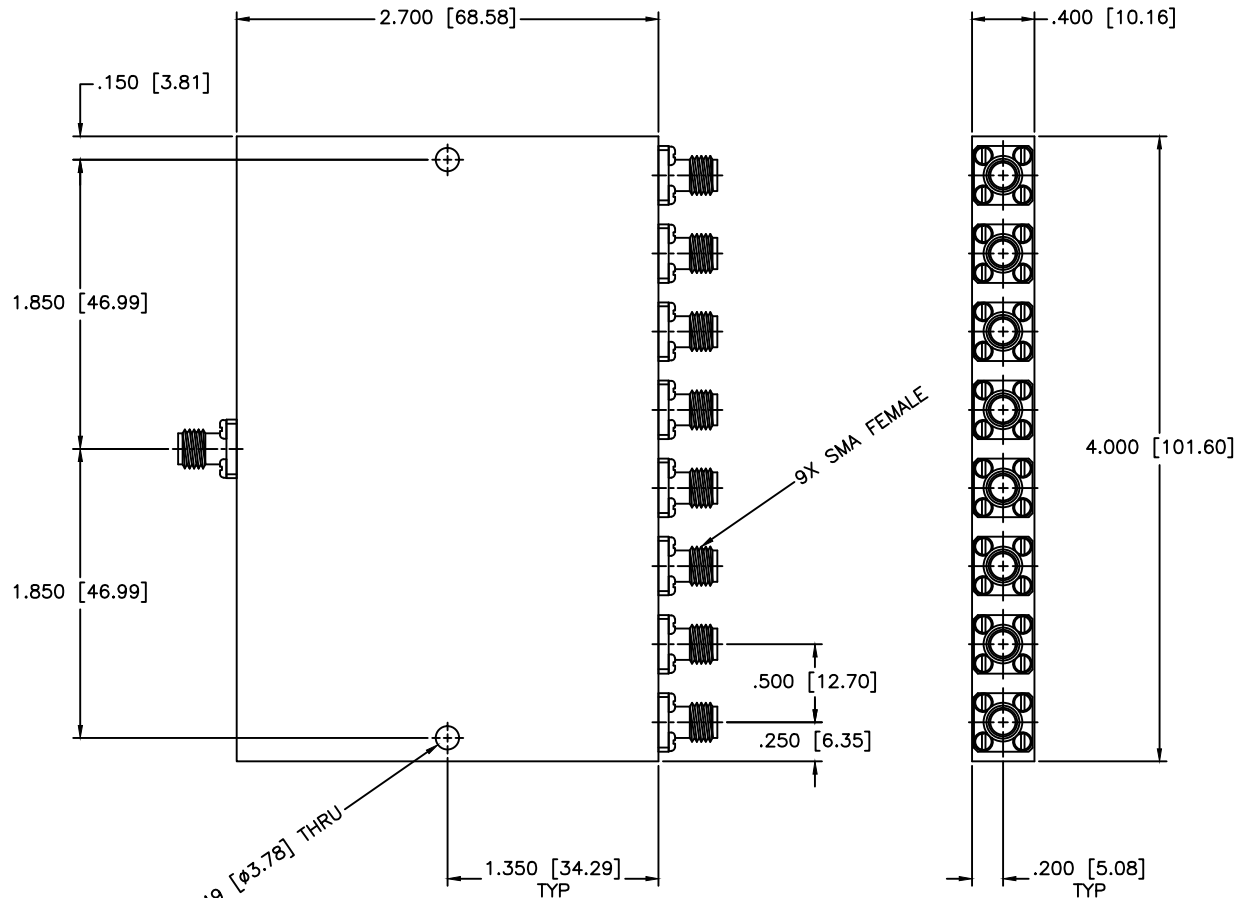

SPECIFICATIONS

Frequency Range: 0.8–2 GHz
 VSWR In/Out: 1.45:1/1.35:1 Max.
 Insertion Loss: 1.2dB Max.
 Isolation: 17dB Min.
 Phase Balance: ±8 Deg. Max.
 Amplitude Balance: ±0.35dB Max.
 Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 03-07-1998
APPROVED: T. Nguyen	DATE: 03-07-1998

MCL MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY POWER DIVIDER	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. PS8-60	
CAGE CODE: OD2L5	SIZE: N/A	REV: A	DWG NO. 80992
DO NOT SCALE THE DRAWING			

