


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

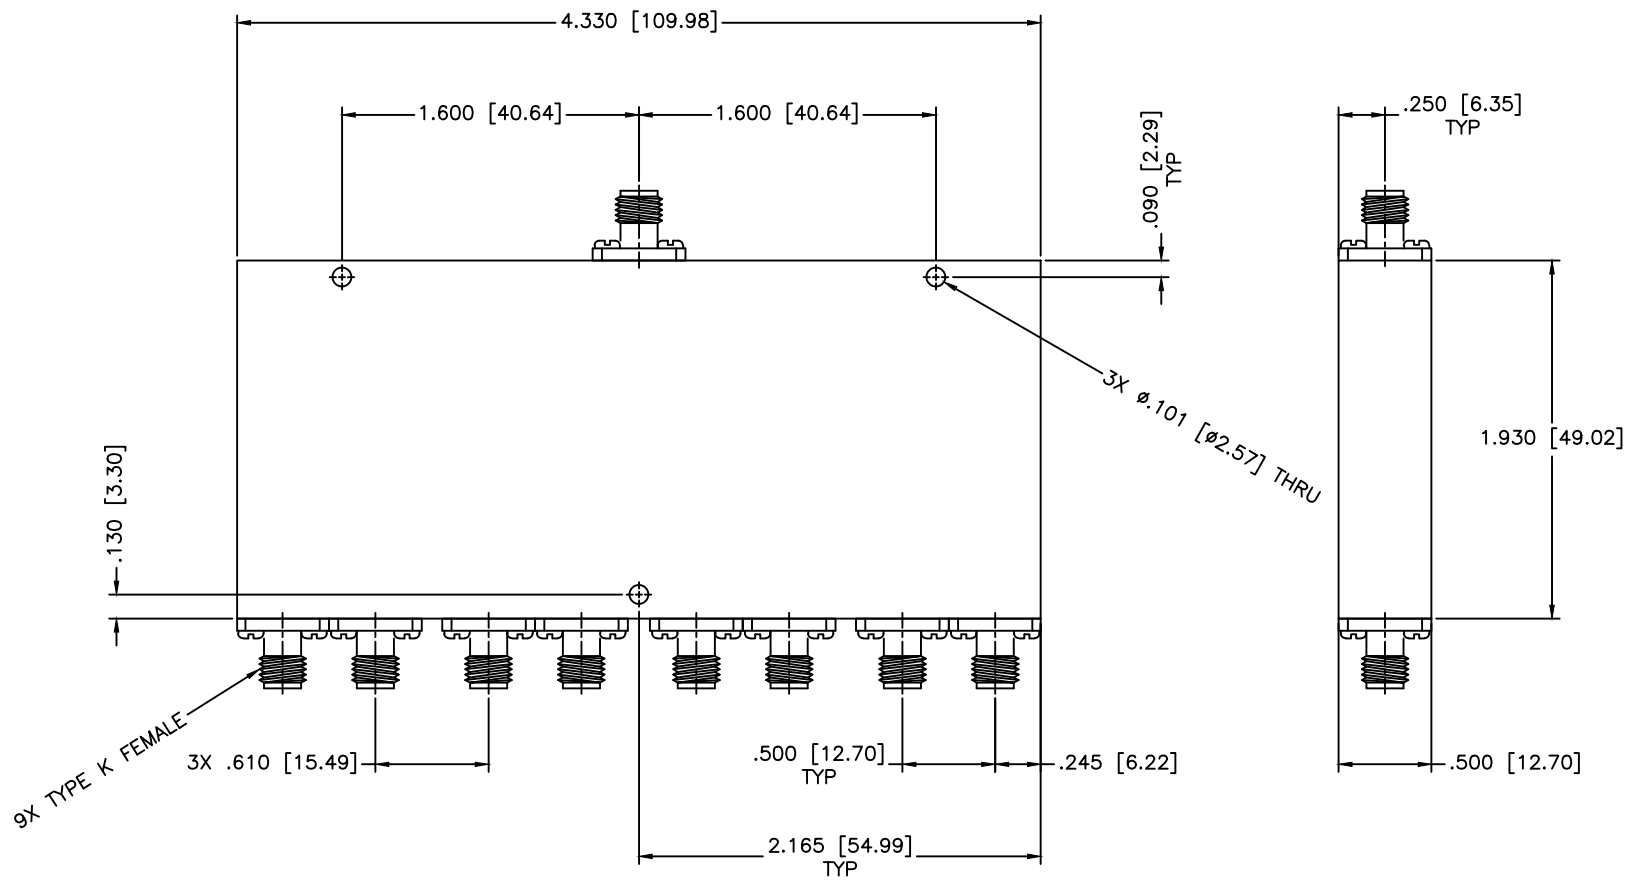

SPECIFICATIONS


Frequency Range: 23–25 GHz
 VSWR In/Out: 1.65:1/1.65:1 Max.
 Insertion Loss: 3.4dB Max.
 Isolation: 15dB Min.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: ±1.0dB Max.
 Power Rating: 10W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		SHEET:	N/A
DRAWN:		DATE:		PART NO.			8-WAY POWER DIVIDER PS8-64
APPROVED:		DATE:		CAGE CODE:		DWG NO.	
Paiboon Luekhamhan		06-29-2006		OD2L5		82583	
T. Nguyen		06-29-2006		DO NOT SCALE THE DRAWING			



UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR (mm) (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)



8-WAY POWER DIVIDER

PS8-64

DO NOT SCALE THE DRAWING