


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

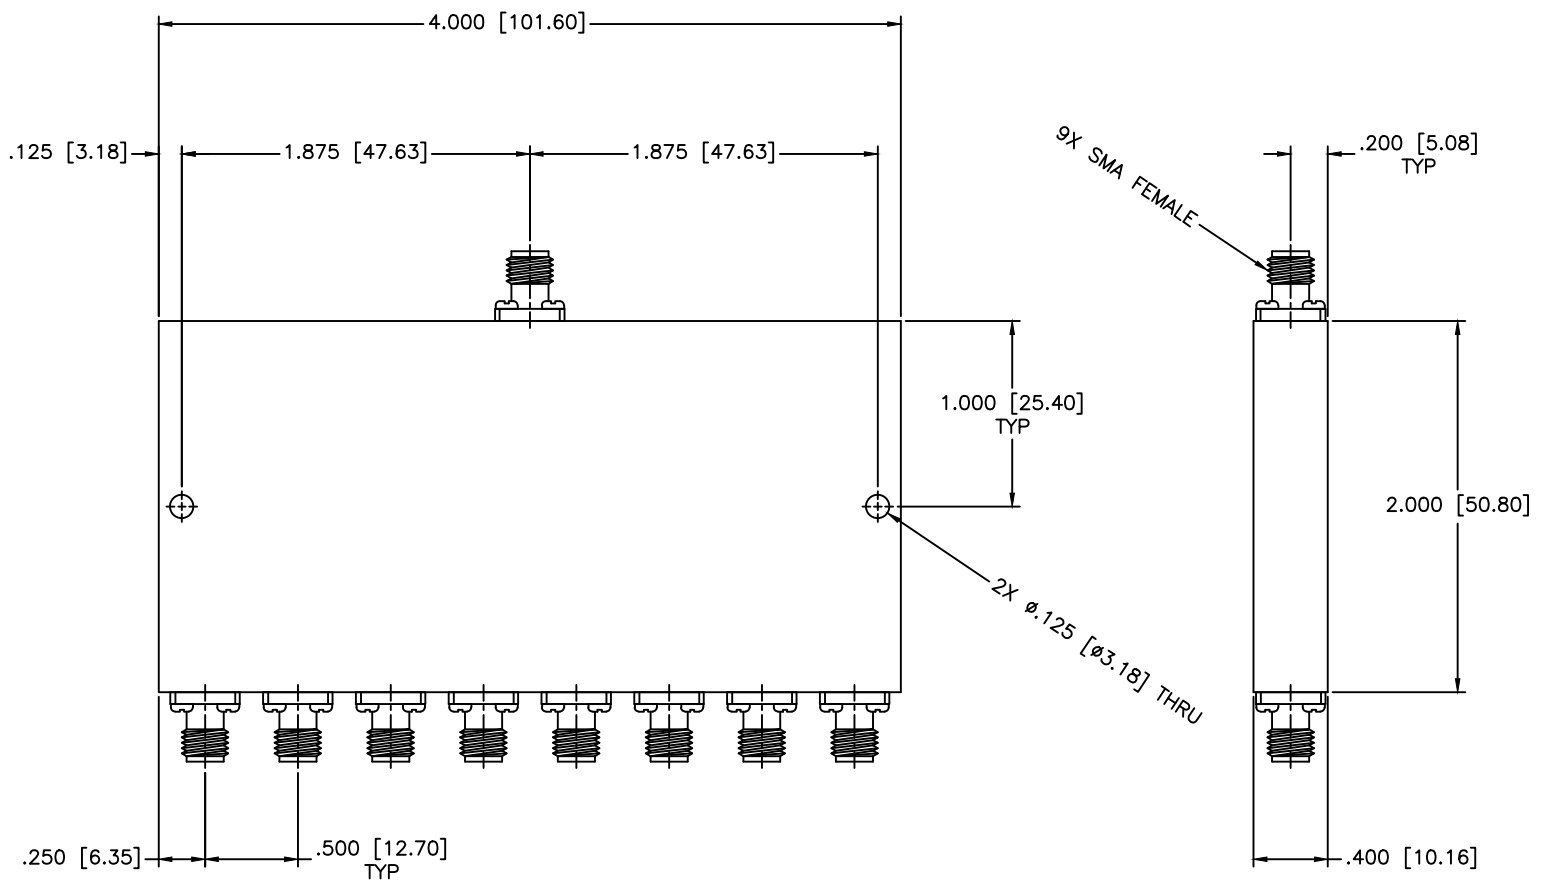

SPECIFICATIONS

- Frequency Range: 5.8–6.4 GHz
- Insertion Loss: 0.7dB Max.
- Isolation: 18dB Min.
- Power Rating: 10 Watts
- Amplitude Balance: ±0.4dB
- VSWR IN/OUT: 1.40:1/1.30:1 Max.
- Phase Balance: ±9 Deg.
- Storage Temperature: -65°C to +125°C
- Operating Temperature: -55°C to +95°C

MATERIAL:	
/	
DRAWN: Paiboon Luekhamhan	DATE: 11-09-1999
APPROVED: T. Nguyen	DATE: 11-09-1999

MCLI	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: 8-WAY POWER DIVIDER		PART NO. PS8-7	
CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 81483
DO NOT SCALE THE DRAWING			

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION