


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

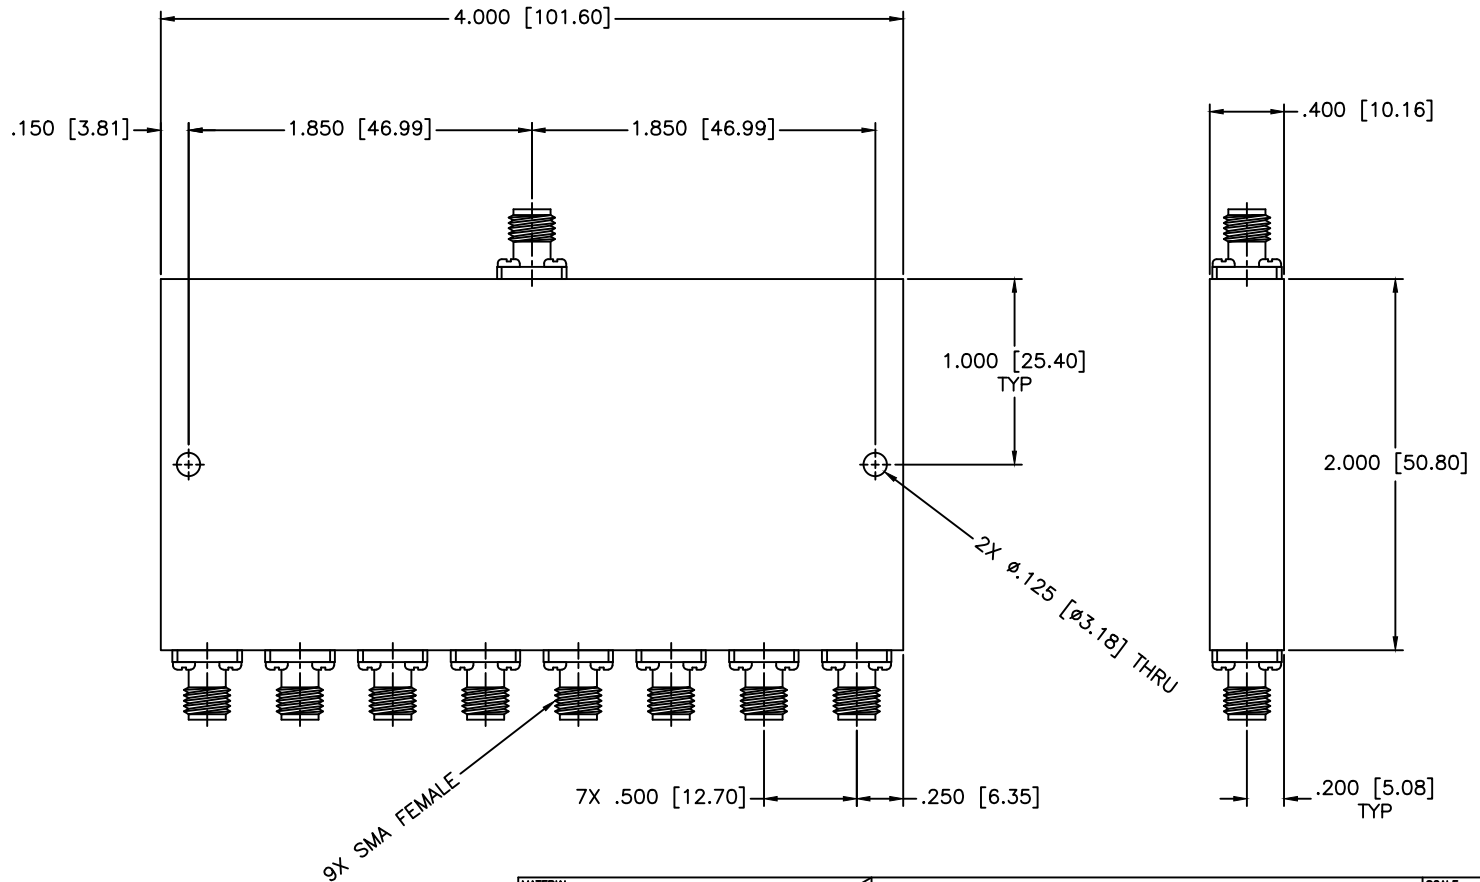

SPECIFICATIONS

Frequency Range: 13.7–14.5 GHz
 Insertion Loss: 1.4dB Max.
 Isolation: 16dB Min.
 Power Rating: 10 Watts
 Amplitude Balance: ±0.6dB
 VSWR In/Out: 1.70:1/1.60:1 Max.
 Phase Balance: ±10 Deg.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE:		8-WAY POWER DIVIDER			
PART NO.:		PS8-77			
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 80993	DO NOT SCALE THE DRAWING
DRAWN: Paiboon Luekhamhan DATE: 10-21-1999	APPROVED: T. Nguyen DATE: 10-21-1999	THIRD ANGLE PROJECTION			