


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

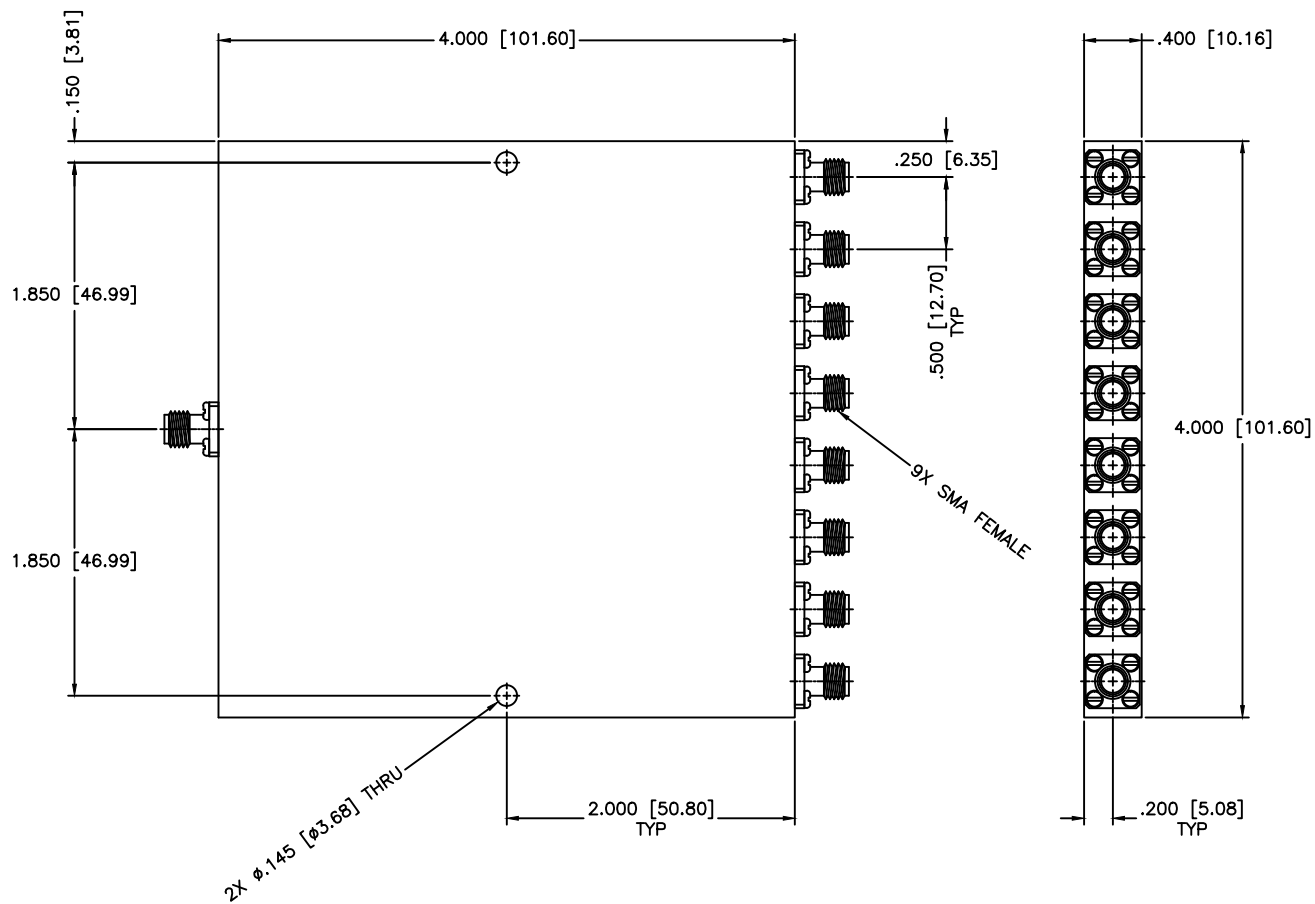

SPECIFICATIONS

Frequency Range: 4–8 GHz
 Insertion Loss: 1.4dB Max.
 Isolation: 16dB Min.
 Power Rating: 10 Watts
 Amplitude Balance: ±0.7 dB
 VSWR: 1.60:1 Max.
 Phase Balance: ±10 Deg.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 8-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 06-18-1998	PART NO. PS8-9A	
APPROVED: T. Nguyen		DATE: 06-18-1998	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 81171
		THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING	