


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

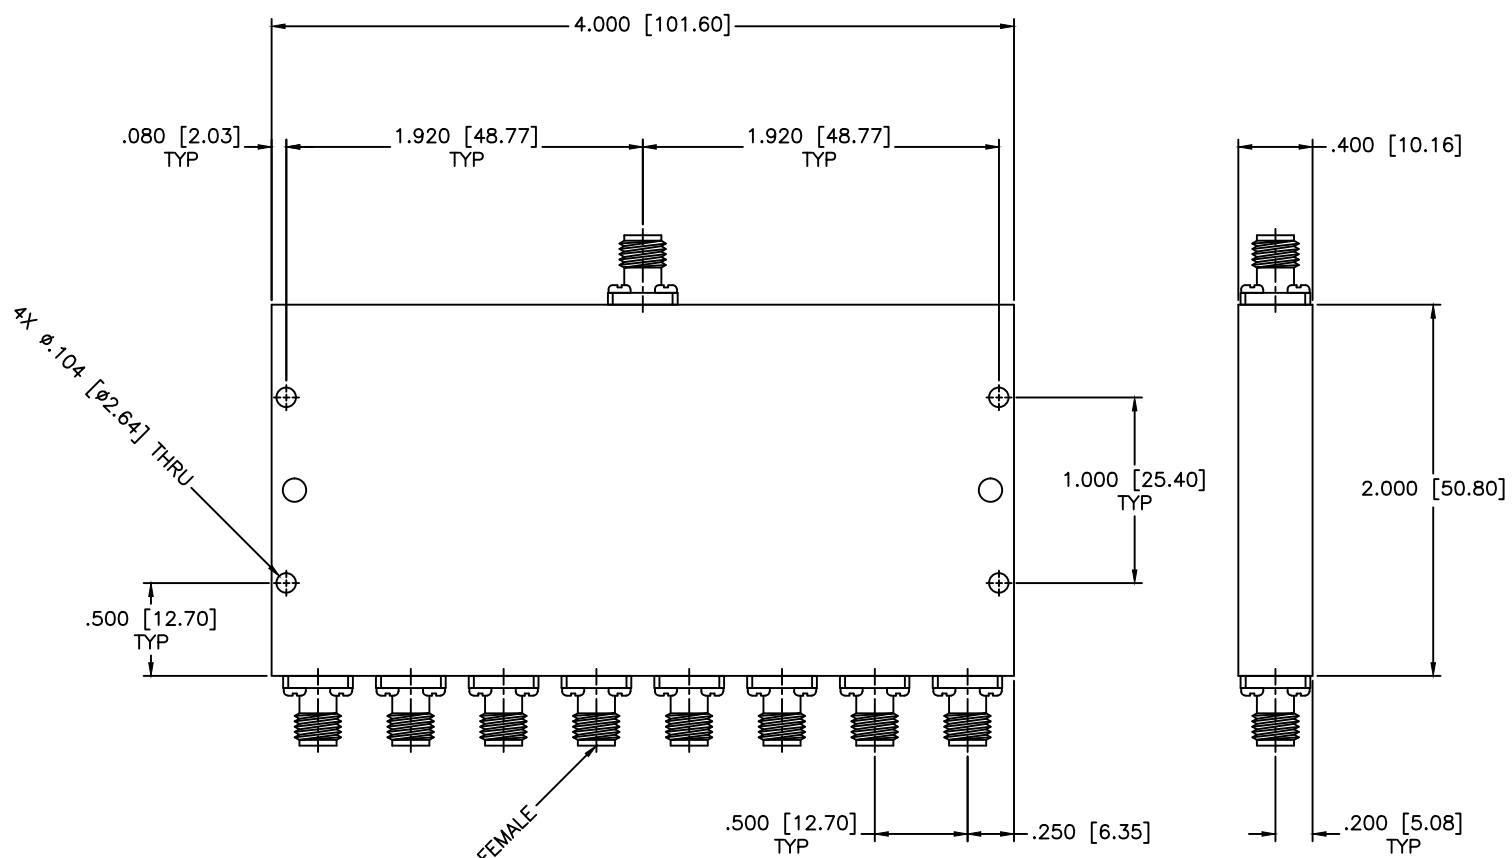

SPECIFICATIONS

Frequency Range: 4–8 GHz
 Insertion Loss: 1.5dB Max.
 Isolation: 15dB Min.
 VSWR: 1.60:1 Max.
 Amplitude Balance: ±0.8dB
 Phase Balance: ±16 Deg.
 Power: 30W Max.
 Operating Temperature: –55°C to +85°C

9X SMA FEMALE

MATERIAL:	
/	
DRAWN: Paiboon Luekhamhan	DATE: 10-06-2010
APPROVED: T. Nguyen	DATE: 10-06-2010

MCLI	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.025 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: 8-WAY POWER DIVIDER		PART NO. PS8-9MA	
CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 85075
DO NOT SCALE THE DRAWING			

