


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

4 | 3 | 2 | 1

D
C
B
A

D
C
B
A

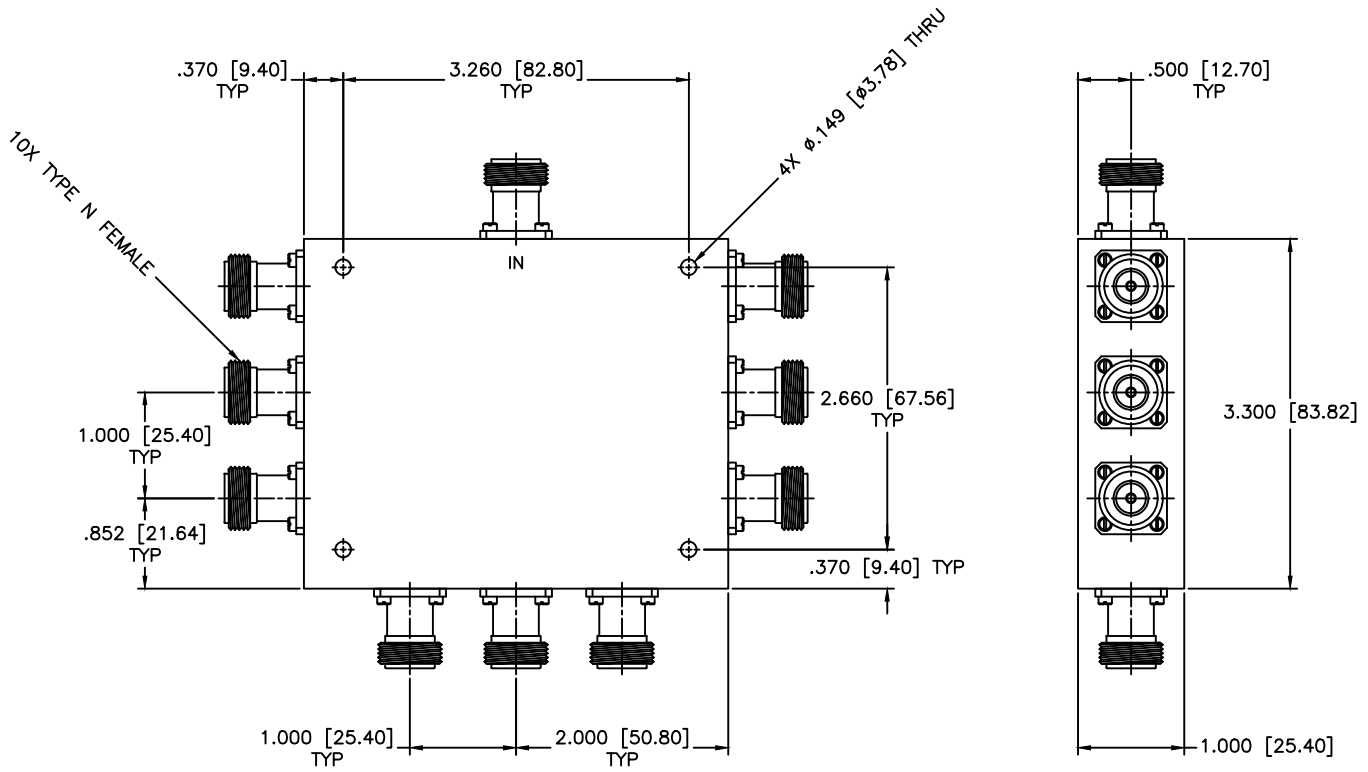

SPECIFICATIONS

Frequency Range: 4.0–8.0 GHz
 VSWR: 1.80:1 Max.
 Amplitude Balance: ±1.6dB Max.
 Phase Balance: ±10 Deg. Max.
 Insertion Loss: 2.0 Max.
 Isolation: 14dB Min.
 Power: 30W

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.015 ANGLE: ±1/2°	DRAWING TITLE:		9-WAY POWER DIVIDER
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.:		PS9-16/NF	
DRAWN: Paiboon Luekhamhan	DATE: 06-17-2021		CAGE CODE:	SIZE:	REV:	DWG. NO.:
APPROVED: T. Nguyen	DATE: 06-17-2021		OD2L5	C	N/A	86910
			DO NOT SCALE THE DRAWING			

4 | 3 | 2 | 1