


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

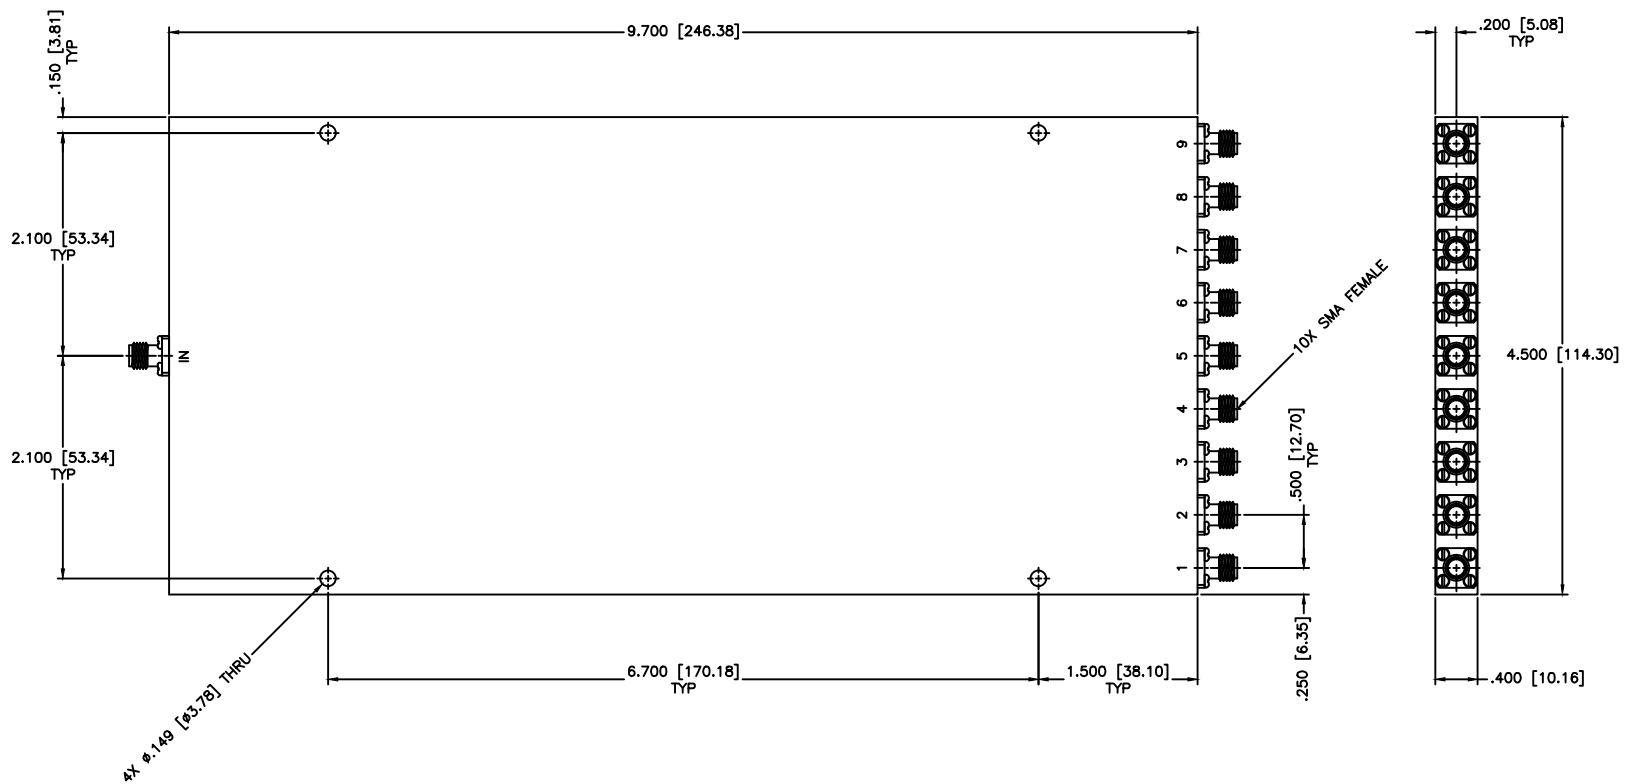

SPECIFICATIONS

Frequency Range: 2–18 GHz
 Insertion Loss: 4.2dB Max.
 Isolation: 15dB Min.
 VSWR Input/Output: 2.00:1/1.90:1 Max.
 Amplitude Balance: 2.0dB Max.
 Power: 10W (Load vswr@1.2)
 Operating Temperature: –55°C to +95°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°			SHEET:
DRAWING TITLE: 9-WAY POWER DIVIDER		PART NO. PS9-18	
DRAWN: Paiboon Luekhamhan	DATE: 01-10-2012	CAGE CODE: OD2L5	
APPROVED: T. Nguyen	DATE: 01-10-2012	SIZE: N/A	REV: N/A
THIRD ANGLE PROJECTION		DWG NO. 85963	
DO NOT SCALE THE DRAWING			