


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

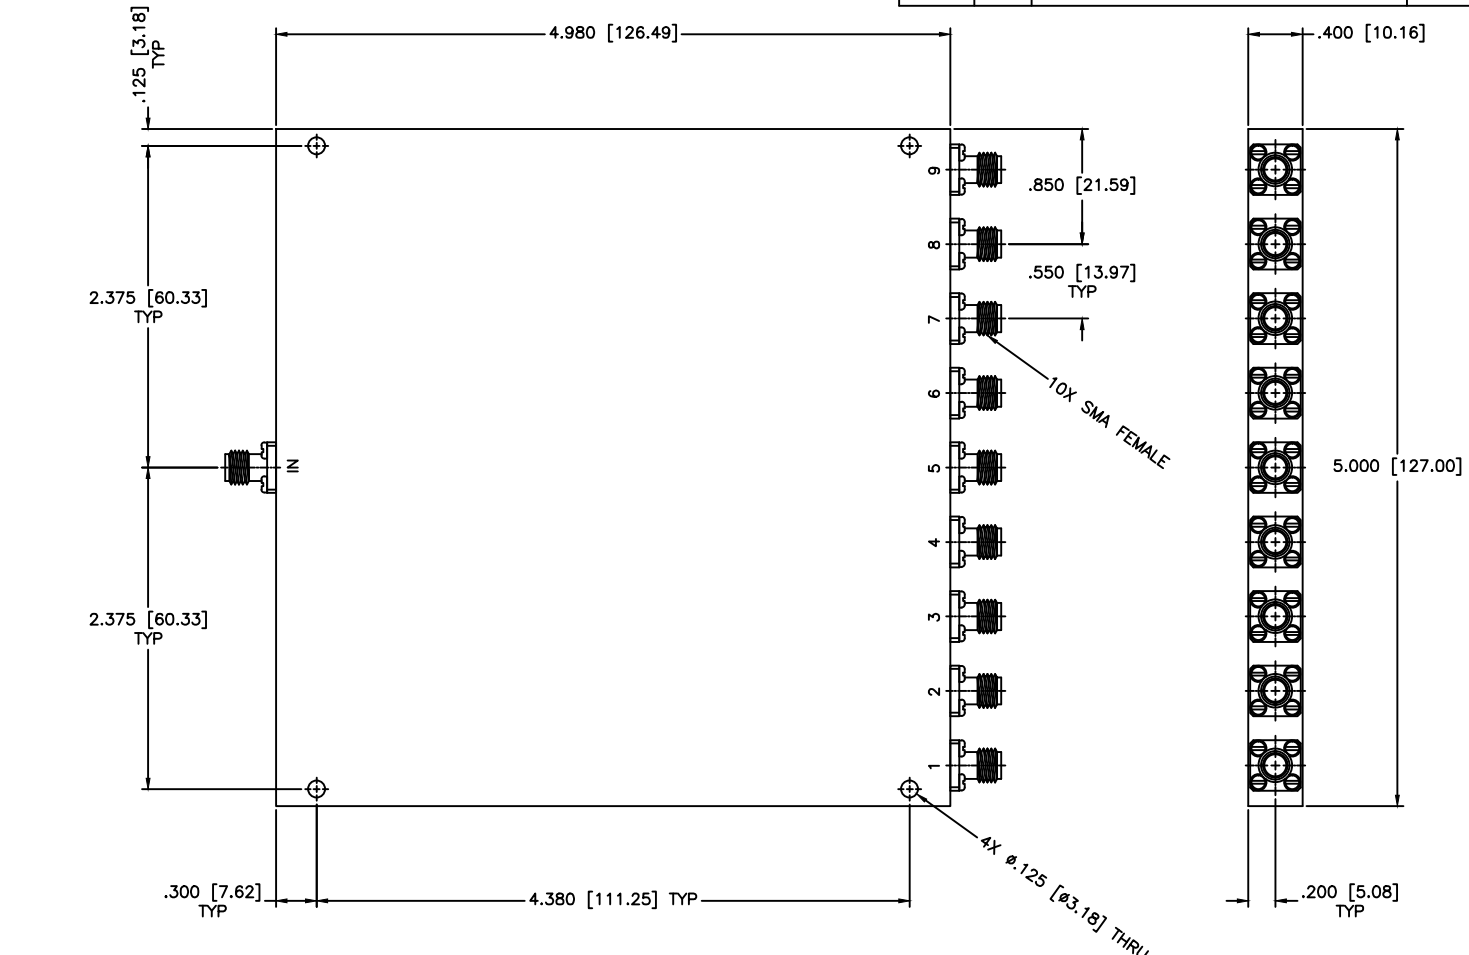

**SPECIFICATION**

Frequency Range: 0.5–1 GHz  
 Insertion Loss: 1.8dB MAX.  
 Isolation: 16dB MIN.  
 VSWR IN/OUT: 1.70:1/1.50:1 MAX.  
 Amplitude Balance: ±0.9dB  
 Input Power: 20 Watts

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>9-WAY POWER DIVIDER</b>	
DRAWN: Paiboon Luekhamhan DATE: 09-23-2010		PART NO.: PS9-1/S	
APPROVED: T. Nguyen DATE: 09-23-2010		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 85056
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	