


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

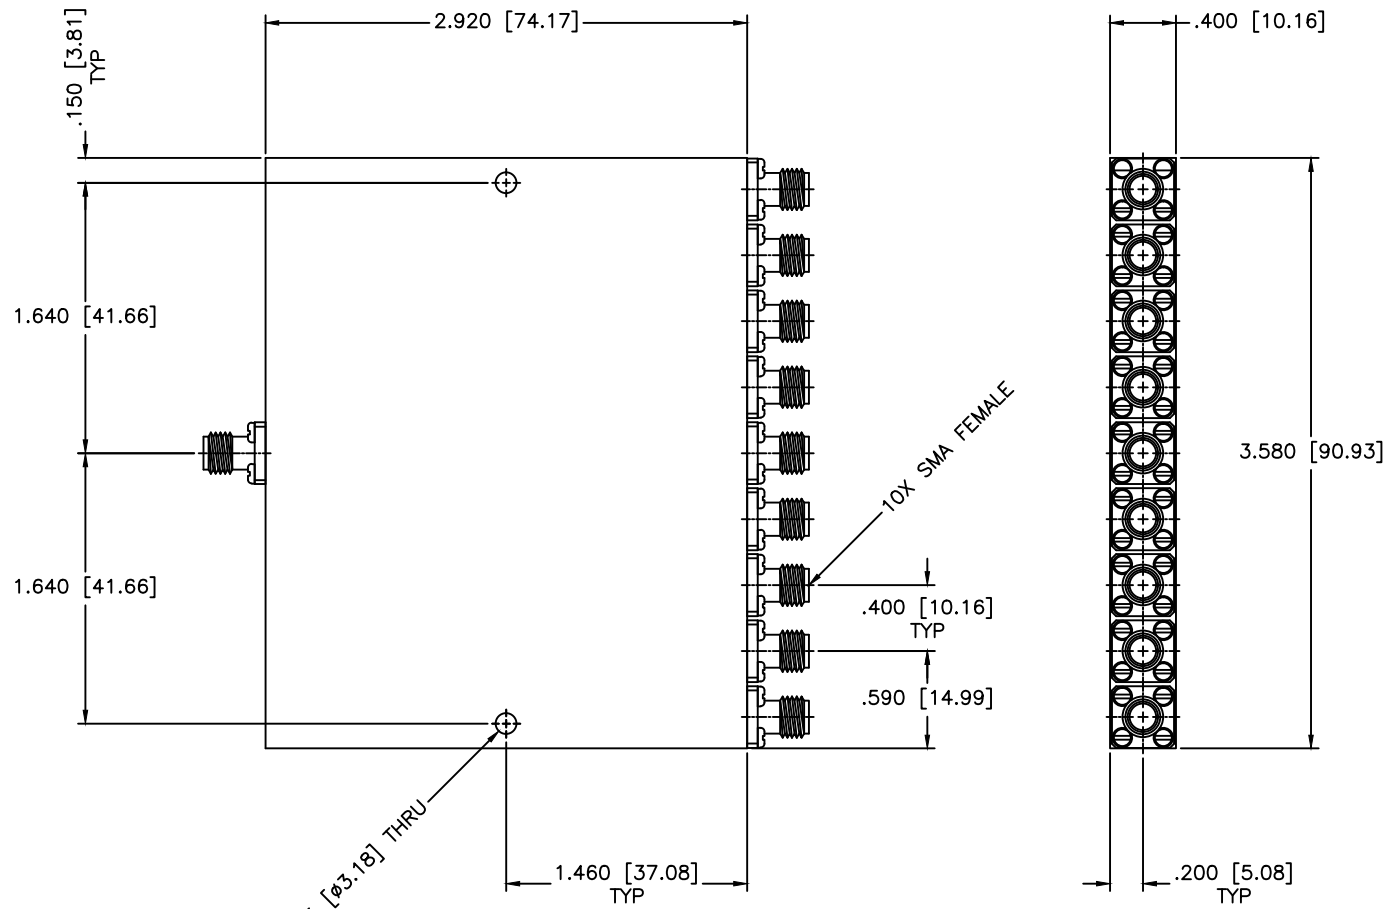

SPECIFICATION

Frequency Range: 869–894 MHz
 Insertion Loss: 0.9dB MAX.
 Isolation: 15dB MIN.
 VSWR IN/OUT: 1.60:1/1.50:1 MAX.
 Amplitude Balance: ±0.9dB
 Input Power: 20 Watts

2X Ø.125 [Ø3.18] THRU

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 9-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS9-3/S		
DATE: 09-29-2010		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 09-29-2010		SIZE: N/A
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV: N/A		DWG NO. 85061
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		