


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

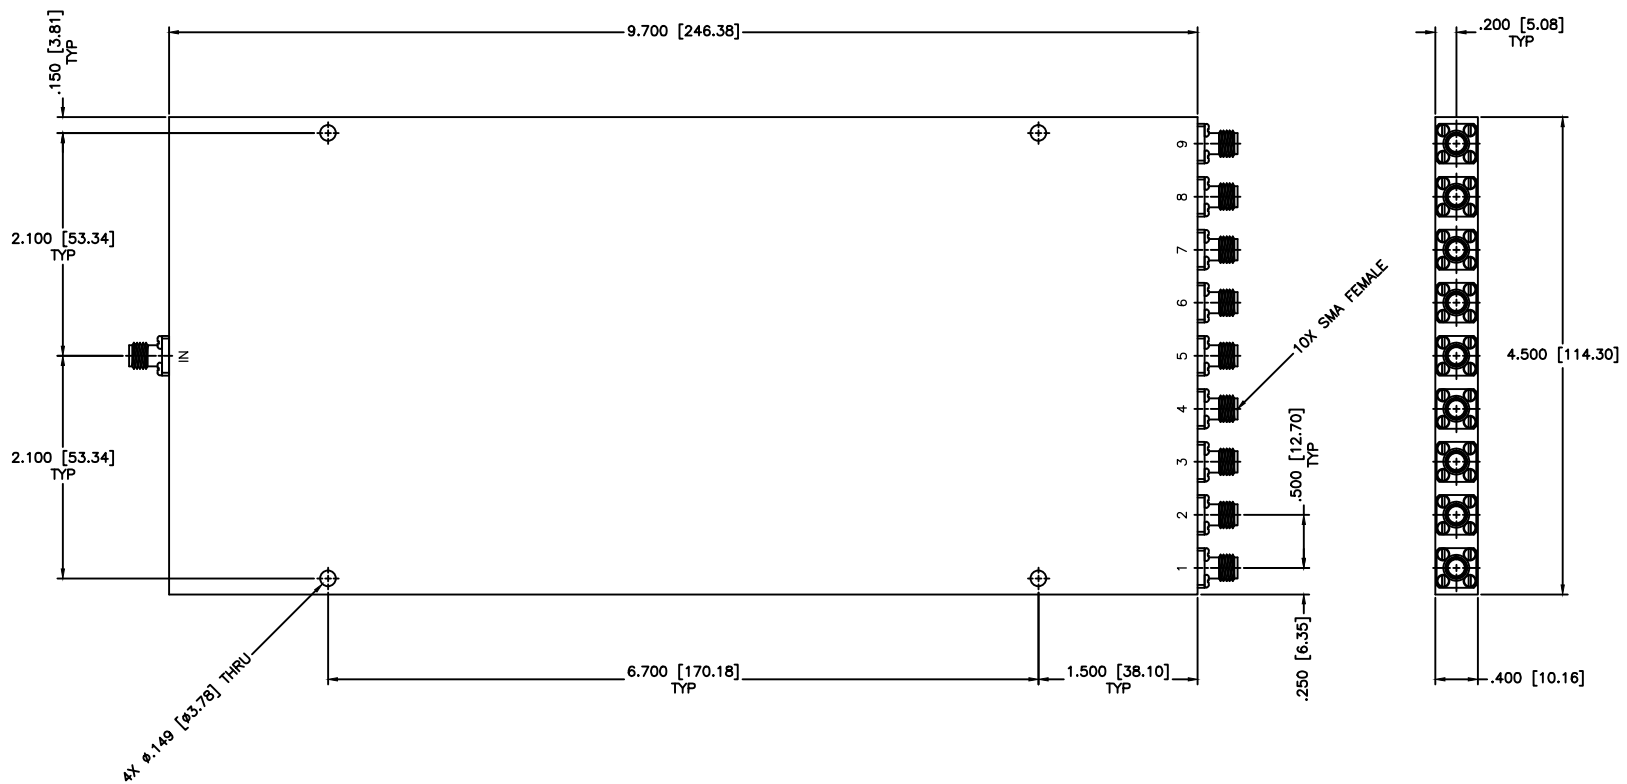

SPECIFICATIONS

Frequency Range: 2–10 GHz
 Insertion Loss: 3.9dB Max.
 Isolation: 15dB Min.
 VSWR Input/Output: 1.90:1/1.90:1 Max.
 Amplitude Balance: 1.9dB Max.
 Power: 10W (Load vswr@1.2)
 Operating Temperature Range: -55°C to +95°C

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .02 ± .008 ANGLE: ± 1/2°			SHEET:
DRAWING TITLE:		9-WAY POWER DIVIDER	
PART NO.:		PS9-8	
DRAWN: Paiboon Luekhamhan	DATE: 03-14-2012	CAGE CODE: OD2L5	SIZE: N/A
APPROVED: T. Nguyen	DATE: 03-14-2012	REV: N/A	DWG NO. 86028
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	