


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

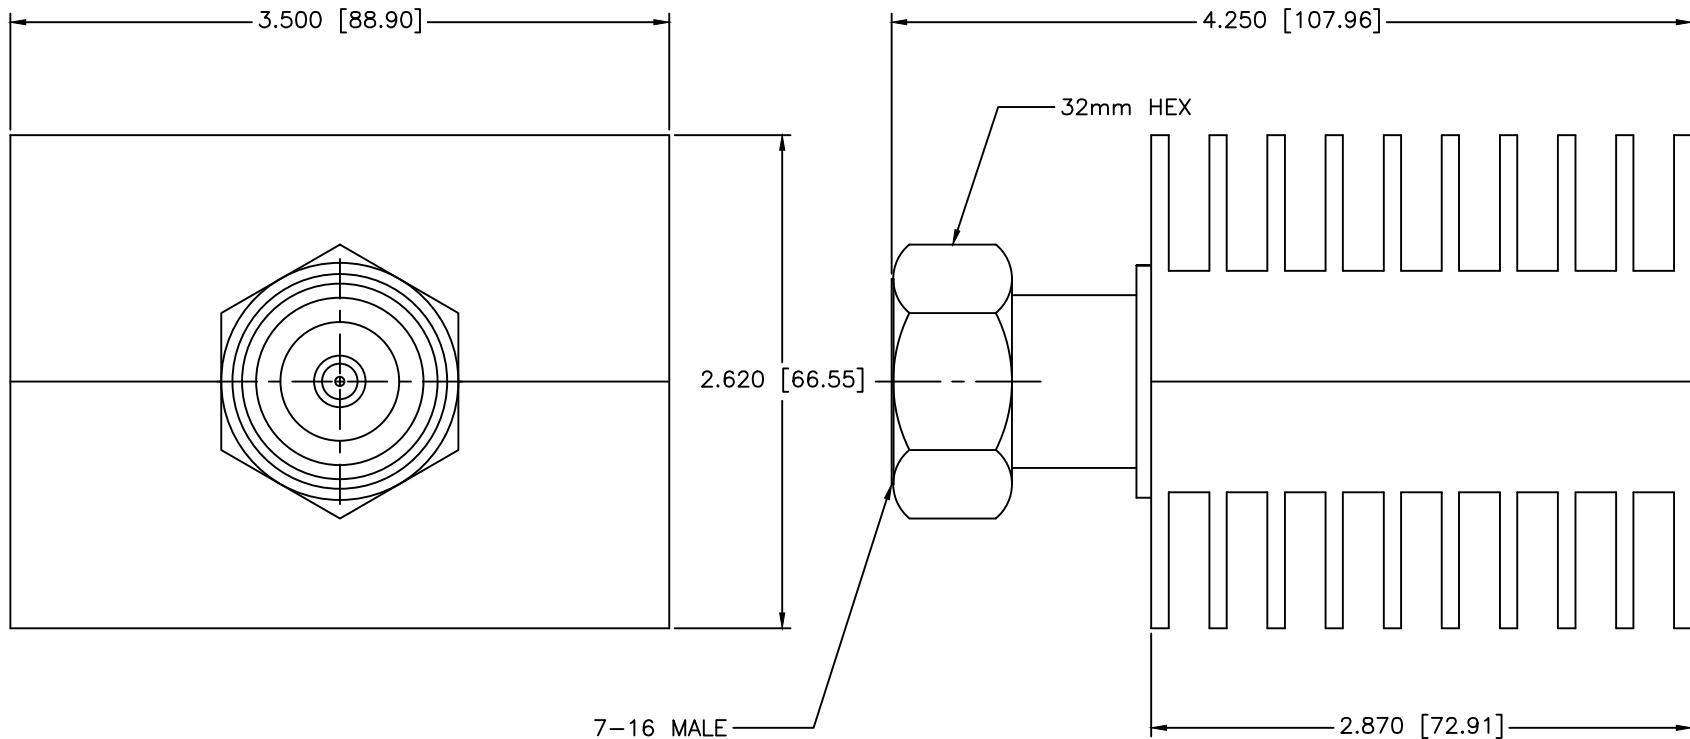

Specifications

Frequency: DC-3.0 GHz
 Impedance: 50 Ohms
 VSWR: 1.20:1 Max.
 Power Average: 50 Watts @ 25° C
 Power Peak: 2,000 Watts
 Connector: Nickel Plated Brass
 Torque: 220 In-Lbs
 Operating Temperature: -55°C to +125°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°		DRAWING TITLE: 7-16 MALE TERMINATION, 50 WATTS		
DRAWN: Paiboon Luekhamhan		PART NO. TDM-3-50		
DATE: 08-26-2011		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 08-26-2011		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: A REV: N/A DWG. NO. 85872 DO NOT SCALE THE DRAWING		