


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

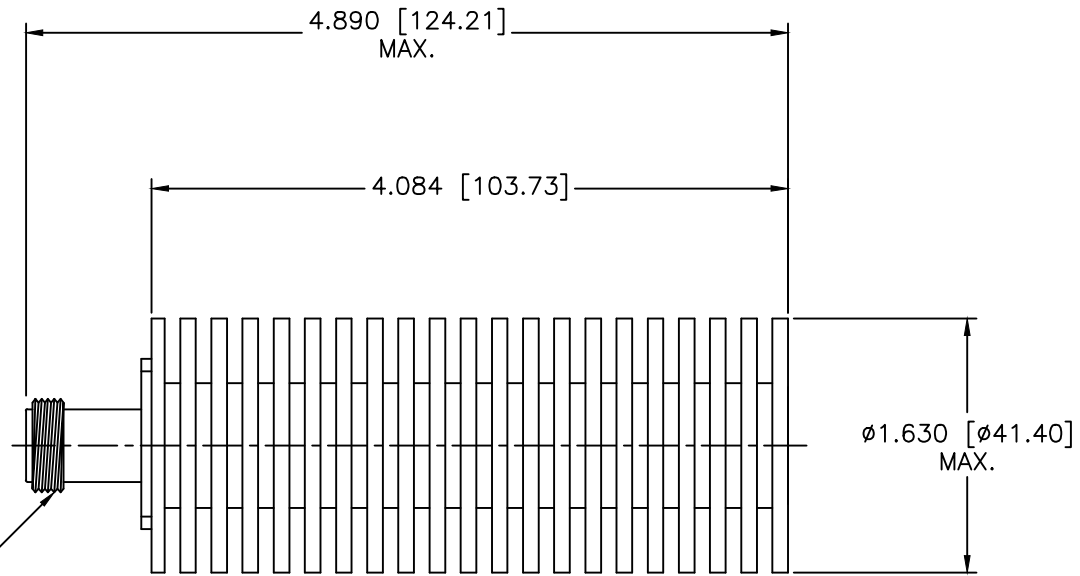

SPECIFICATIONS

FREQUENCY RANGE: DC-6 GHz
 VSWR: 1.25:1 Max.
 IMPEDANCE: 50 Ohms
 INPUT POWER: 50 Watts Avg @+25°C
 Derated Linearly to 10 Watts @ +125°C
 PEAK POWER: 500 Watts Max.
 OPERATING TEMPERATURE RANGE: -65°C to +125°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A	
			SHEET:	N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: COAXIAL TERMINATION		
			PART NO. TNF-21		
DRAWN: Paibon Luekhamhan	DATE: 06-12-2013	<small>FREQUENCY NOTES: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> 	CAGE CODE:	OD2L5	
APPROVED: T. Nguyen	DATE: 06-12-2013		SIZE:	N/A	REV:
			DWG NO. 82501		
			DO NOT SCALE THE DRAWING		