


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

SPECIFICATIONS

FREQUENCY RANGE: DC-12 GHz
 VSWR: 1.15:1
 IMPEDANCE: 50 Ohms ±5%
 INPUT POWER: 5 Watts @+25°C
 Derated Linearly to 0.5 Watts @ +125°C
 PEAK POWER: 500 Watts
 5uSec Pulse, 0.2% duty cycle
 OPERATING TEMP. RANGE: -55°C to +125°C

MECHANICAL

CONNECTOR SHELL: PASSIVATED STAINLESS STEEL
 CENTER CONDUCTOR: GOLD PLATED BERYLLIUM COPPER
 BODY: BLACK ANODIZED ALUMINUM

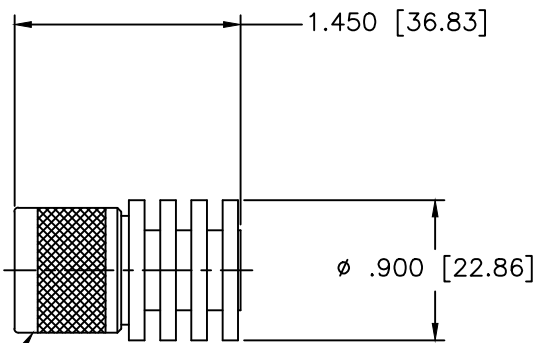

TYPE N MALE

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/32 DECIMALS: ± .010 ANGLE: ± 1/2°		DRAWING TITLE: TYPE N MALE TERMINATION, 5 WATTS		
DRAWN: Paiboon Luekhamhan		PART NO. TNM-1		
DATE: 01-05-2012		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 01-05-2012		
<small>FREQUENTLY MISSED: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> 		SIZE: N/A	REV: A	DWG NO. 80770
DO NOT SCALE THE DRAWING				