

SPECIFICATIONS

FREQUENCY RANGE: DC-40 GHz

VSWR: 1.20:1 MAX.

INPUT POWER: 0.5 WATT AVG @ 25°C

IMPEDANCE: 50 OHMS

OPERATING TEMPERATURE RANGE: -45°C to +85°C


RF LEAKAGE: 90dB MIN.

MECHANICAL

SHELL: PASSIVATED STAINLESS STEEL

CONTACT: GOLD PLATE BERYLLIUM COPPER

REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

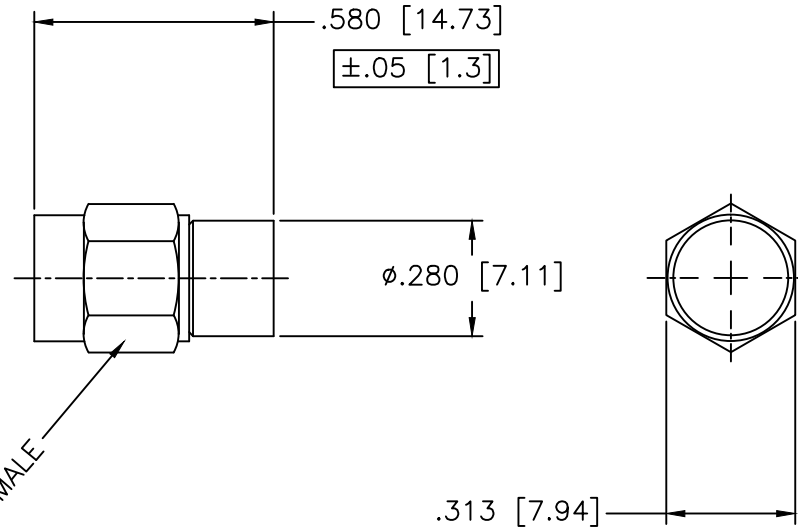

TYPE 2.92MM MALE

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: SMA MALE TERMINATION		
DRAWN: Paiboon Luekhamhan		DATE: 06-19-2007		PART NO. TSM-40	
APPROVED: T. Nguyen		DATE: 06-19-2007		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 82840
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	