


Control Voltage: 0 to +8 Volts typical.
 Operating Power: + 20 dBm max.
 Power Handling: +27 dBm max.
 Operating Temperature: -25°C to +80°C

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

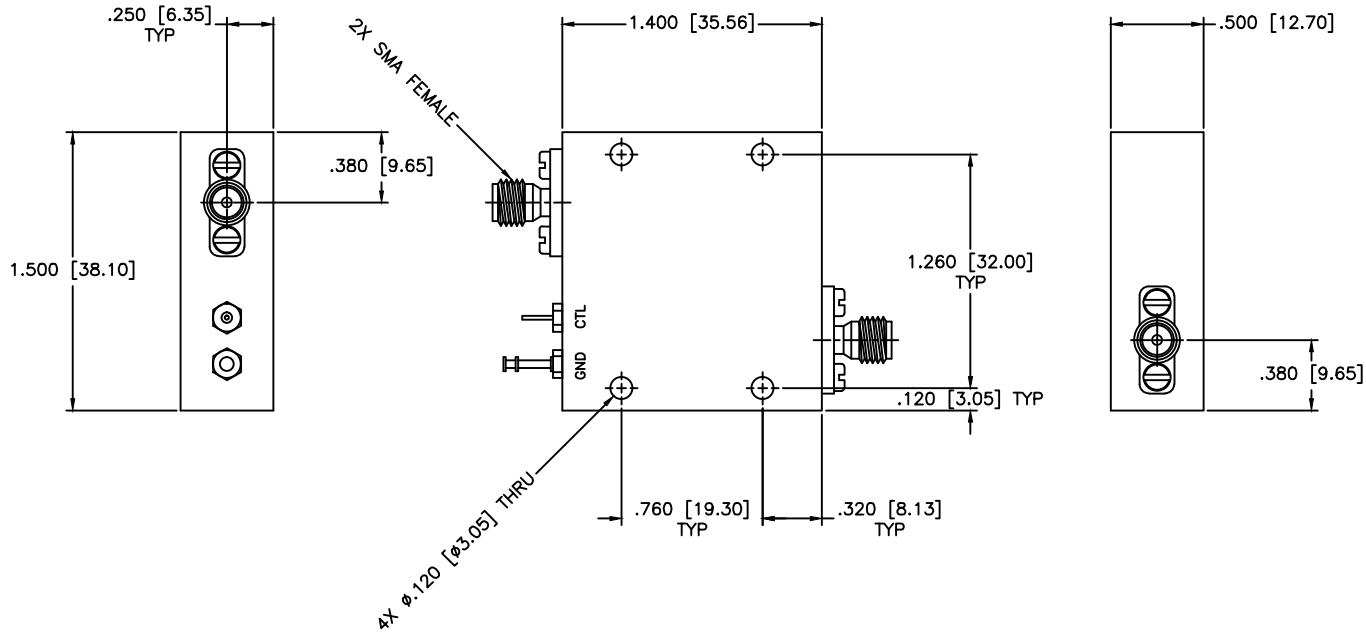

SPECIFICATIONS

Frequency Range: 9.0–9.5 GHz
 Insertion Loss: 4.0dB Max.
 VSWR: 2.00:1 Max.
 Attenuation Range: 30dB

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		SHEET:
			VOLTAGE CONTROLLED ATTENUATOR			
			PART NO.		VC-13-30	
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE:	REV:	DWG NO.
APPROVED:	DATE:		OD2L5	A	N/A	84397
		THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING			