


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

F = FLANGE TYPES

- 6 = UG-COVER
- 7 = UG-CHOKE
- S = SPECIAL

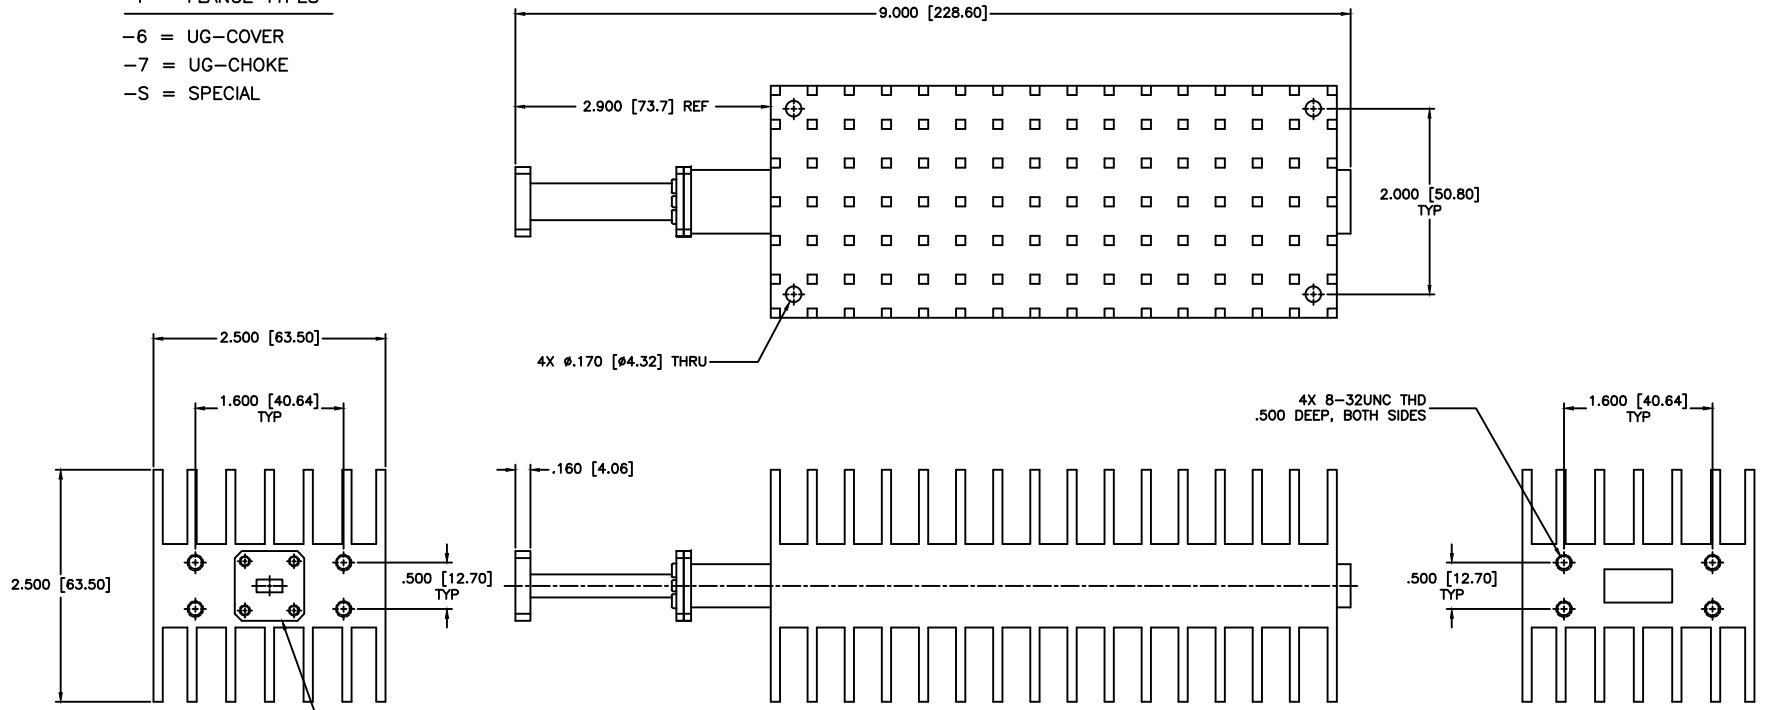

SPECIFICATIONS

Frequency Range: 33-50 GHz
 Waveguide Size: WR22 (Input)
 Flange Types: Per Order (-6,-7,-S)
 VSWR: 1.15 Max.
 Average Power: 500 Watts

ORDERING INFORMATION

EXAMPLE PART NUMBER: WL-16-F
 VERY HIGH POWER SERIES
 FREQUENCY BAND
 FLANGE TYPE

MATERIAL: ALUMINUM 6061		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7225 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-8116 HTTP://WWW.MCLI.COM		SCALE: N/A
DRAWN: Paiboon Luekhamhan		DATE: 05-02-2011		SHEET: N/A
APPROVED: T. Nguyen		DATE: 05-02-2011		DRAWING TITLE: TERMINATION, WR22 500 Watts
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		PART NO. WL-16-F		
CAGE CODE: OD2L5		SIZE: N/A	REV: N/A	DWG NO. 85644
DO NOT SCALE THE DRAWING				