


F = FLANGE TYPES

- 1 CPRG
- 2 CPRF
- 6 UG-COVER
- 7 UG-CHOKE
- S SPECIAL

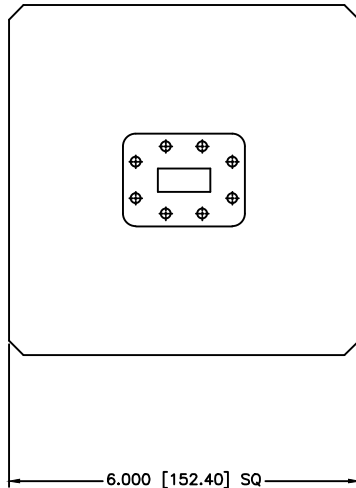

SPECIFICATIONS

Frequency Range: 5.85-8.20 GHz


Waveguide Size: WR137 (Input)

Flange Types: Per Order (-1,-2,-6,-7,-S)

VSWR: 1.15 Max.

Average Power: 3000 Watts

REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

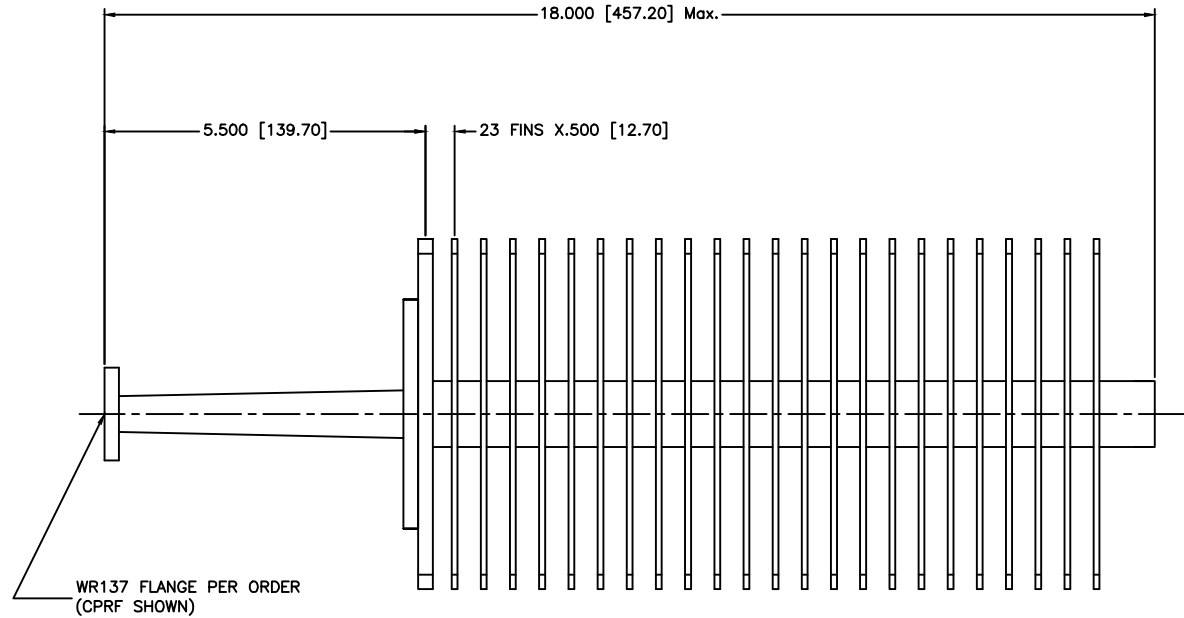

ORDERING INFORMATION

EXAMPLE PART NUMBER: WL-8-F
 VERY HIGH POWER SERIES
 FREQUENCY BAND
 FLANGE TYPE

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: VERY HIGH POWER, WR137 TERMINATION	
DRAWN: Paiboon Luekhamhan		PART NO.: WL-8-F	
DATE: 05-02-2011		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		SIZE: N/A	REV: N/A
DATE: 05-02-2011		DWG NO.: 85643	
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	