


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

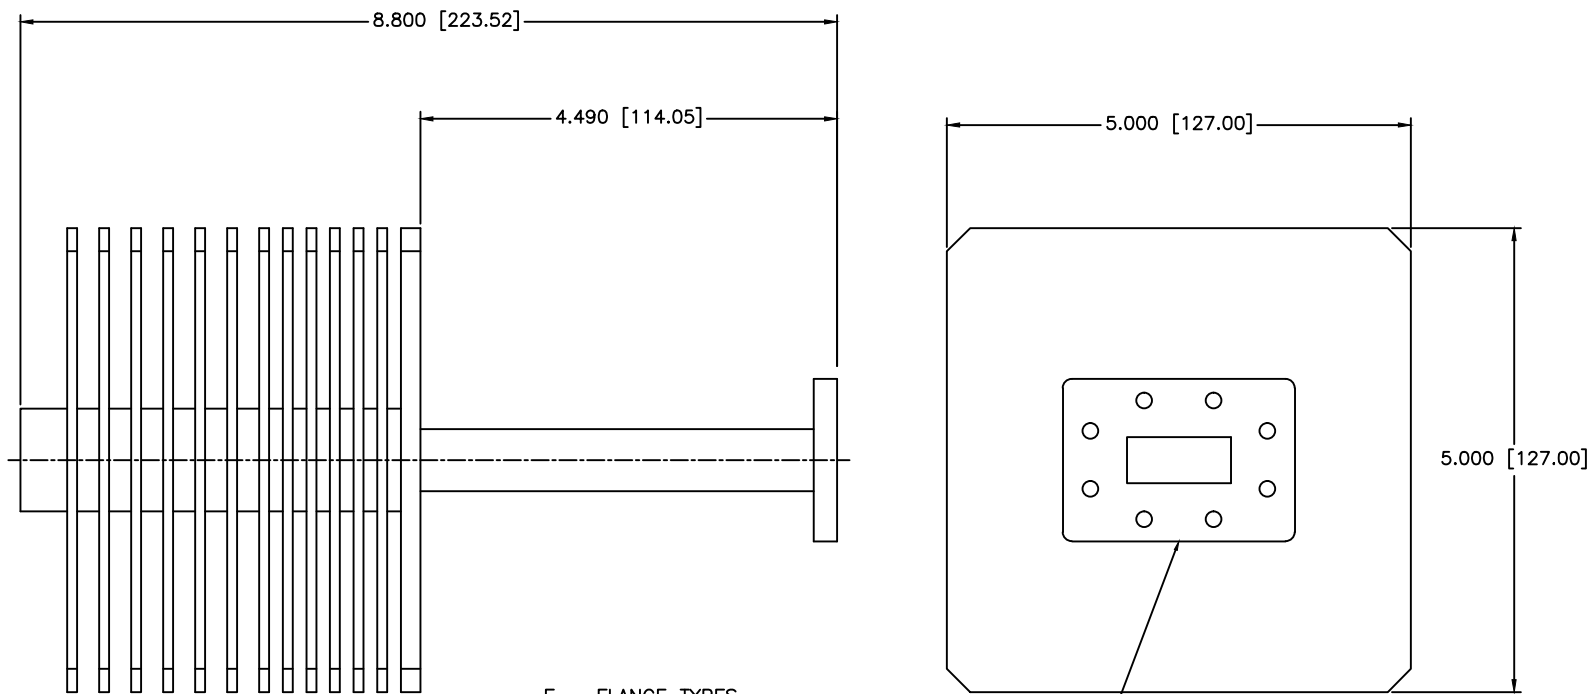

- F = FLANGE TYPES
- 1 = CPRG
 - 2 = CPRF
 - 6 = UG-COVER
 - 7 = UG-CHOKE
 - S = SPECIAL

SPECIFICATIONS

Frequency Range: 7.05-10 GHz

Waveguide Size: WR112 (Input)

Flange Types: Per Order (-1,-2,-6,-7,-S)

VSWR: 1.15 Max.

Average Power: 3000 Watts

CPR112F STANDARD
OTHERS UPON REQUEST

ORDERING INFORMATION

EXAMPLE PART NUMBER: WL-9-F

VERY HIGH POWER SERIES

FREQUENCY BAND

FLANGE TYPE

MATERIAL: ALUMINUM 6061		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7225 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-8116 http://www.mcli.com		SCALE: N/A
DRAWN: Paiboon Luekhamhan		DATE: 05-03-2011	DRAWING TITLE: TERMINATION, WR112 3000 Watts	
APPROVED: T. Nguyen		DATE: 05-03-2011	PART NO. WL-9-F	
<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.01 ± 0.005 ANGLE: ± 1/2°</small>		<small>DEPENDENT DIMS: THE DIMENSION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED IN ANY OTHER DRAWING WITHOUT THE WRITING PERMISSION OF MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>	CAGE CODE: OD2L5	SIZE: C REV: N/A DWG NO.: 85656
DO NOT SCALE THE DRAWING				