


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

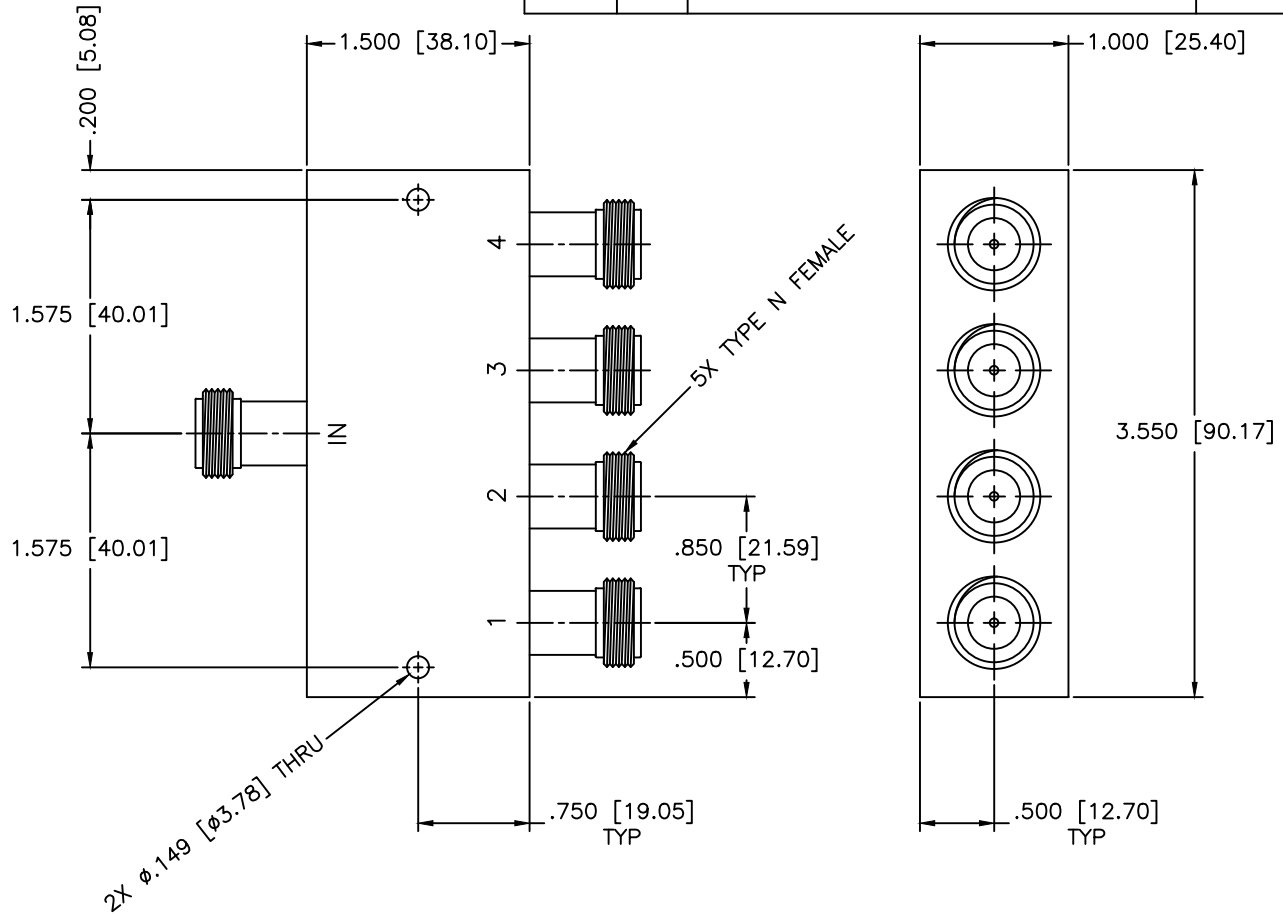

SPECIFICATIONS

Frequency Range: 3–500 MHz
 Isolation: 18dB Min.
 VSWR: 1.50:1 Max.
 Insertion Loss: 0.9dB Max.
 Amplitude Balance: ±0.5dB Max.
 Phase Balance: ±6 Deg. Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-23-1997
APPROVED: T. Nguyen	DATE: 10-23-1997

MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: 4-WAY POWER DIVIDER		
PART NO. PL4-2/NF		
CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
DO NOT SCALE THE DRAWING		DWG NO. 80156

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION