


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

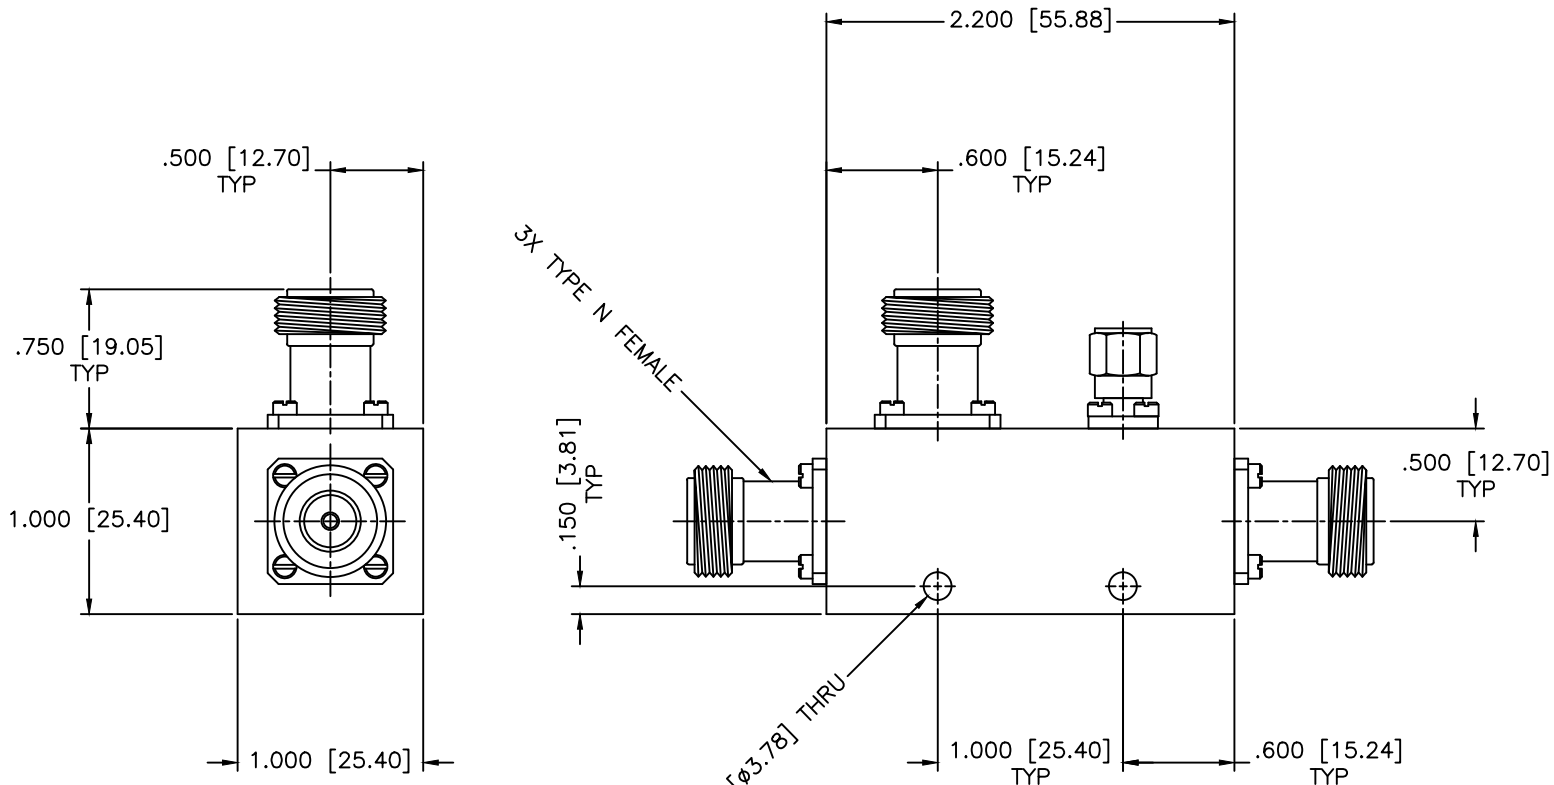

**SPECIFICATIONS**

Frequency Range: 7–12.4 GHz  
 Coupling: 20±1.25dB  
 Frequency Sensitivity: ±0.85dB  
 Insertion Loss: 0.45dB Max.  
 Directivity: 15dB Min.  
 VSWR: 1.50:1 Max.  
 Power Incident, Reflected: 50W, 50W, 3kW Peak

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWN:		DRAWING TITLE:		DIRECTIONAL COUPLER		
DATE:		PART NO.:		C6-20/NF		
Paiboon Luekhamhan 11-12-1997		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	SIZE: A	REV: N/A
APPROVED: T. Nguyen 11-12-1997		THIRD ANGLE PROJECTION 		OD2L5	DO NOT SCALE THE DRAWING	
						DWG NO. 80416