


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

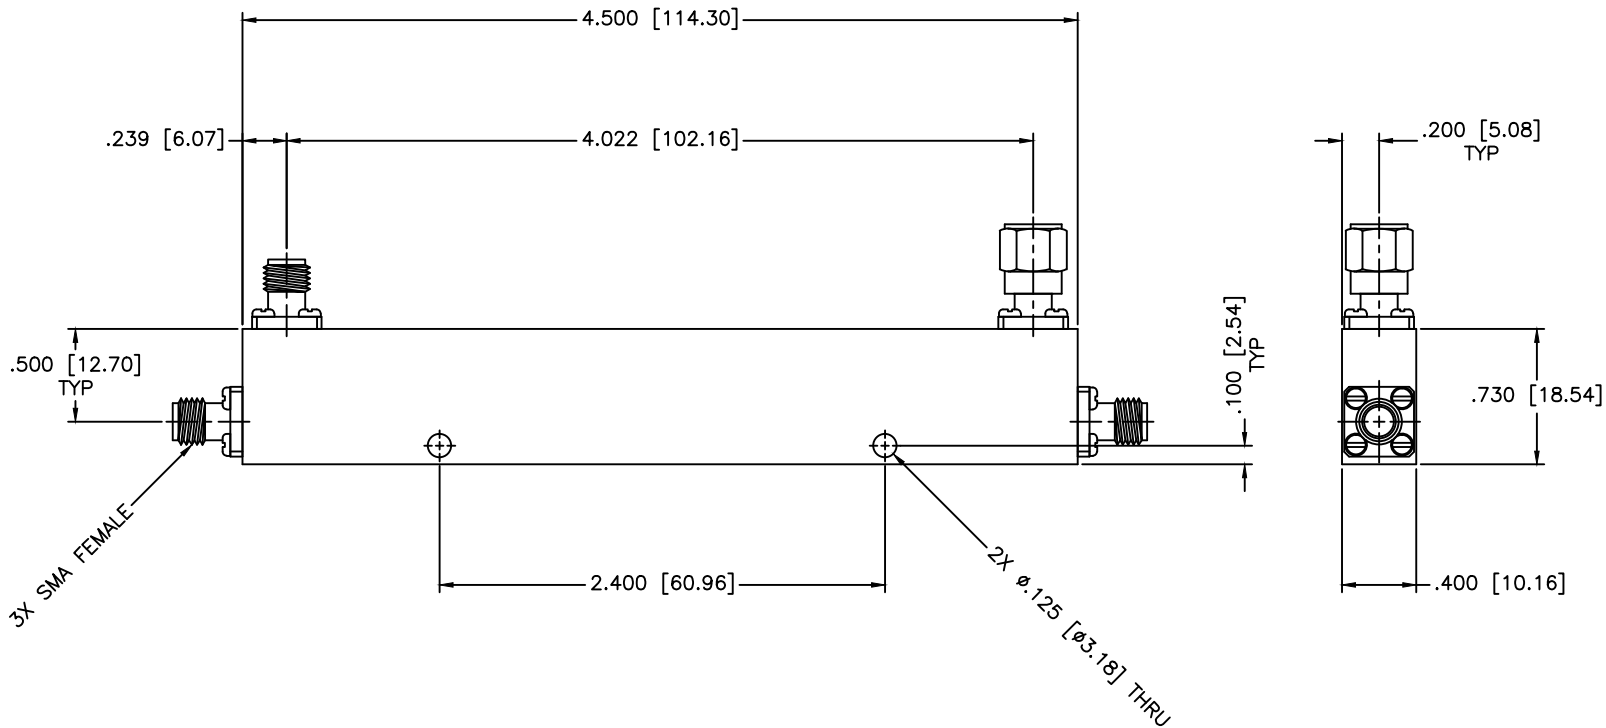

SPECIFICATIONS

Frequency Range: 0.5–8 GHz
 VSWR: 1.35:1 Max.
 Coupling: 10±1dB
 Insertion Loss: 1.3dB Max.
 Directivity: 15dB Min.
 Frequency Sensitivity: ±1.0dB
 Average Power: 20W, 3kW Peak
 Operating Temperature: -32°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: DIRECTIONAL COUPLER		
DRAWN: Paiboon Luekhamhan		PART NO. CB98-10		
DATE: 01-06-2011		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 01-06-2011		SIZE: N/A
THIRD ANGLE PROJECTION		REV: A		DWG NO. 85210
DO NOT SCALE THE DRAWING				