


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

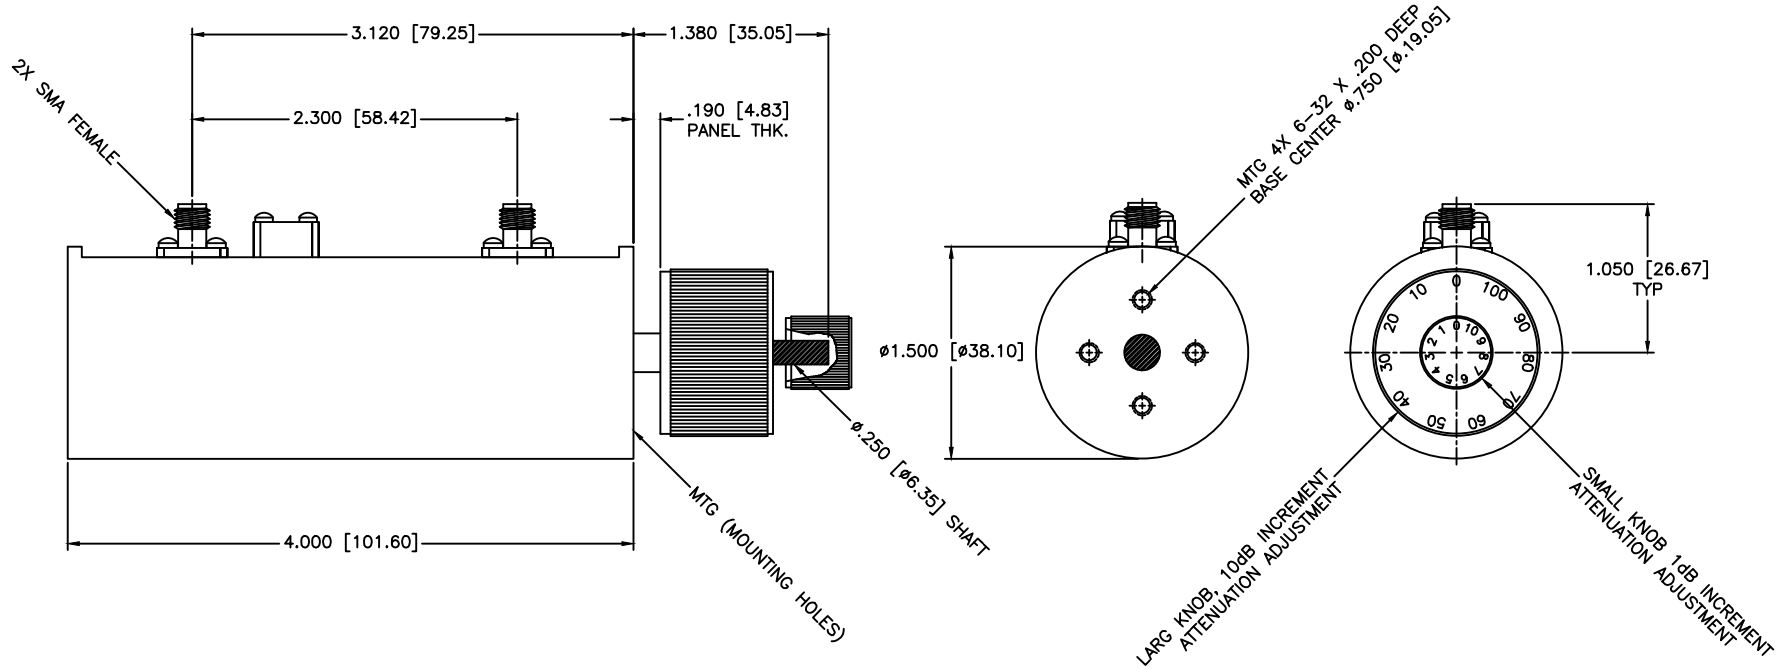

SPECIFICATIONS

Frequency Range: 406–406.1 MHz
 Attenuation: 50dB (±0.2dB or 1%)
 Insertion Loss: 0.5dB Max.
 VSWR: 1.50:1 Max.
 RF Power: 2W Avg. 1kW Peak

Environmental

Temperature Range: –20°C to +85°C
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 40,000ft. Survival 25,000ft Operating

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: DUAL CONCENTRIC ROTARY STEP ATTENUATOR		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 02-07-2011		PART NO. CVA34-50	
APPROVED: T. Nguyen		DATE: 02-07-2011		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 85368
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING	