


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

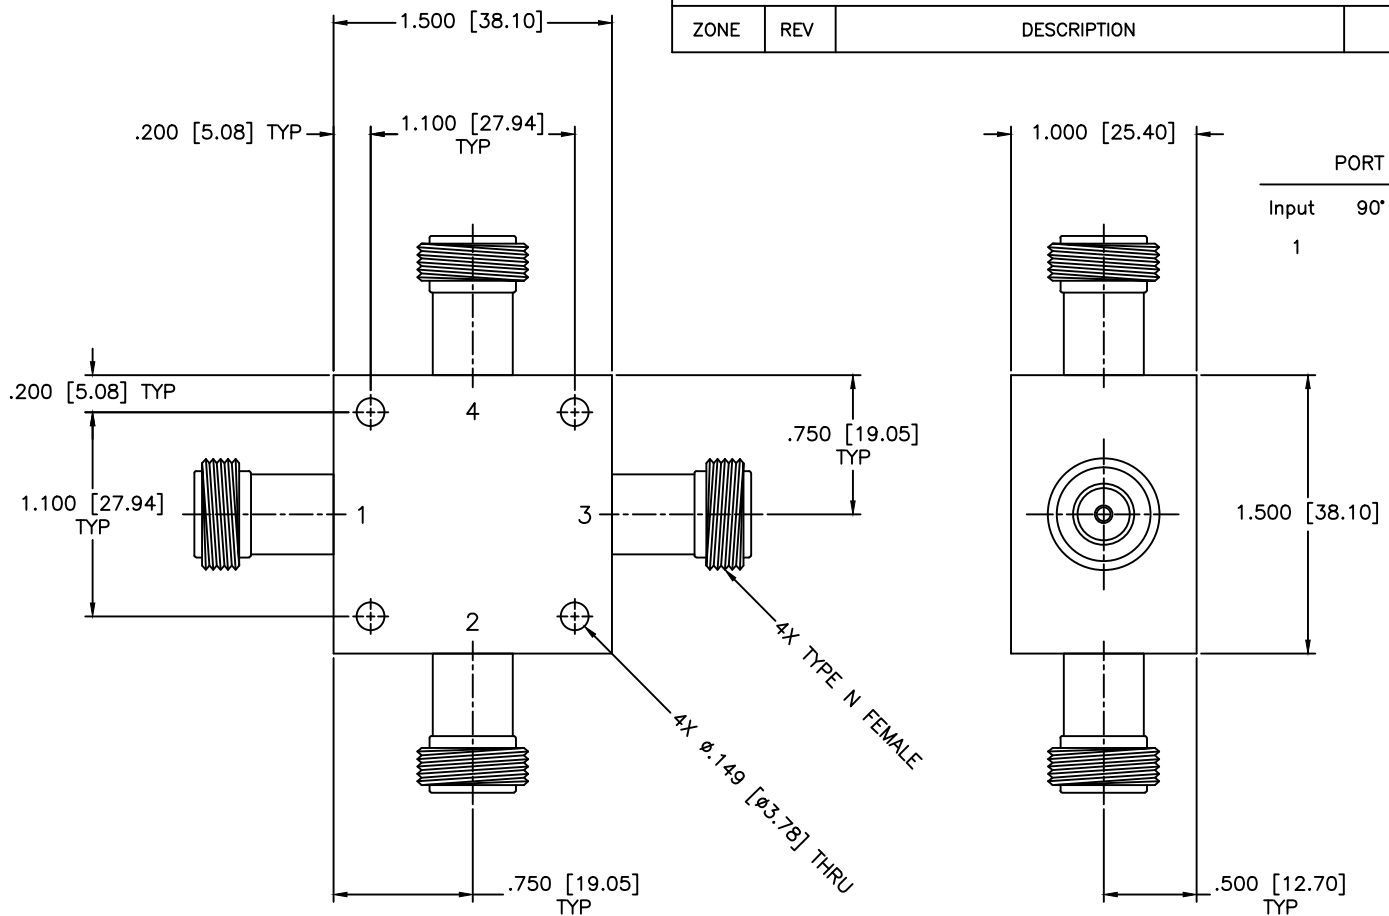

PORT CONFIGURATION			
Input	90° Out	Isolated	0° Out
1	2	3	4

SPECIFICATIONS

Frequency Center: 21.4 MHz
 Isolation: 25dB Min.
 VSWR: 1.20:1 Max.
 Insertion Loss: 0.5dB Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±2 Deg. Max.
 Operating Temperature: -55°C to +85°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 11-29-1997
APPROVED: T. Nguyen	DATE: 11-29-1997

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	90° HYBRID 10% BANDWIDTH
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.	HL-3/NF	
CAGE CODE:	SIZE:	REV:	DWG NO.	
OD2L5	A	N/A	80667	
DO NOT SCALE THE DRAWING				

