


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

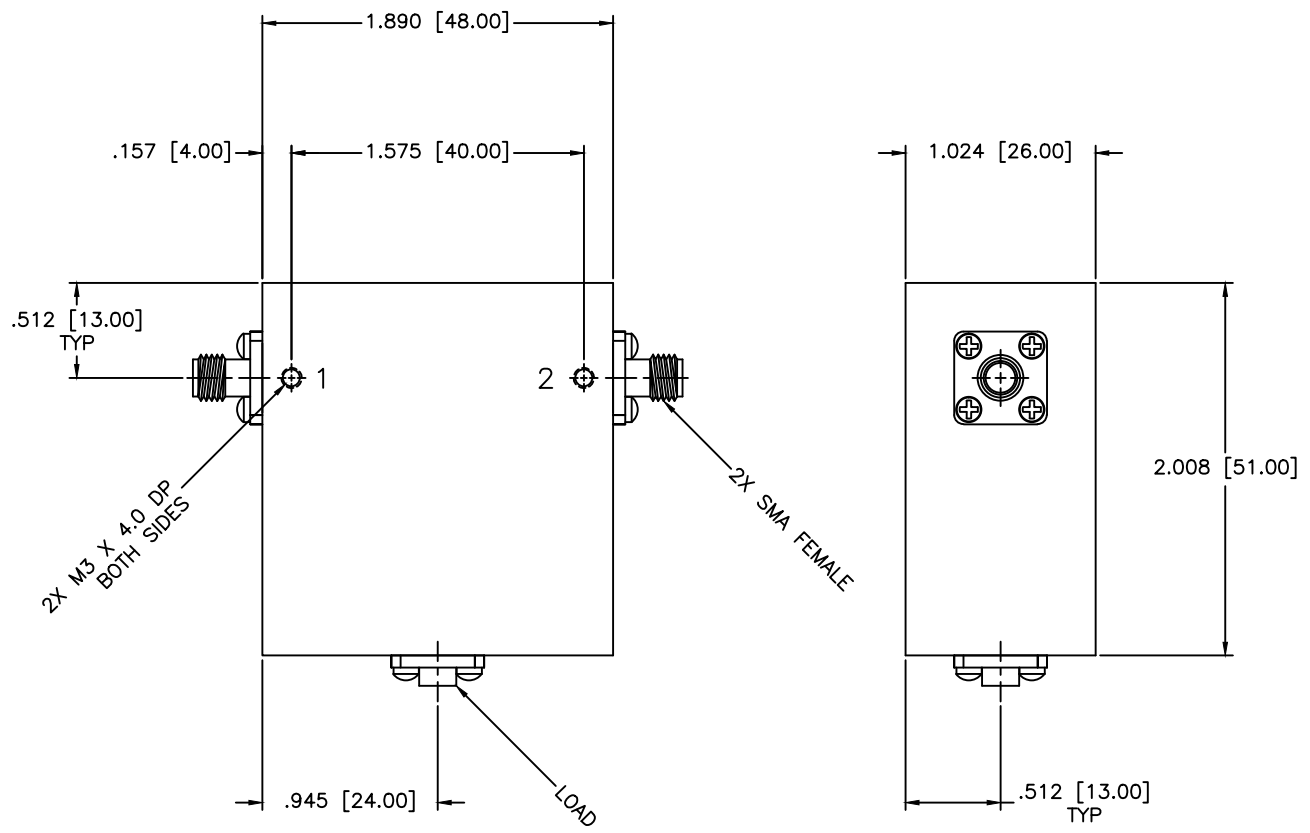

SPECIFICATIONS

Frequency Range: 0.40–0.52 GHz
 Isolation: 17dB Min.
 Insertion loss: 0.80dB Max.
 VSWR: 1.38:1 Max.
 Operating Temperature: 0°C to +50°C
 Circulator Power: 100W Avg, 500W Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL ISOLATOR		
DRAWN: Paiboon Luekhamhan		PART NO.: IS-106		
DATE: 03-17-2009		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 03-17-2009		
THIRD ANGLE PROJECTION		SIZE: N/A		
		REV: N/A		
		DWG NO.: 84327		
DO NOT SCALE THE DRAWING				