


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

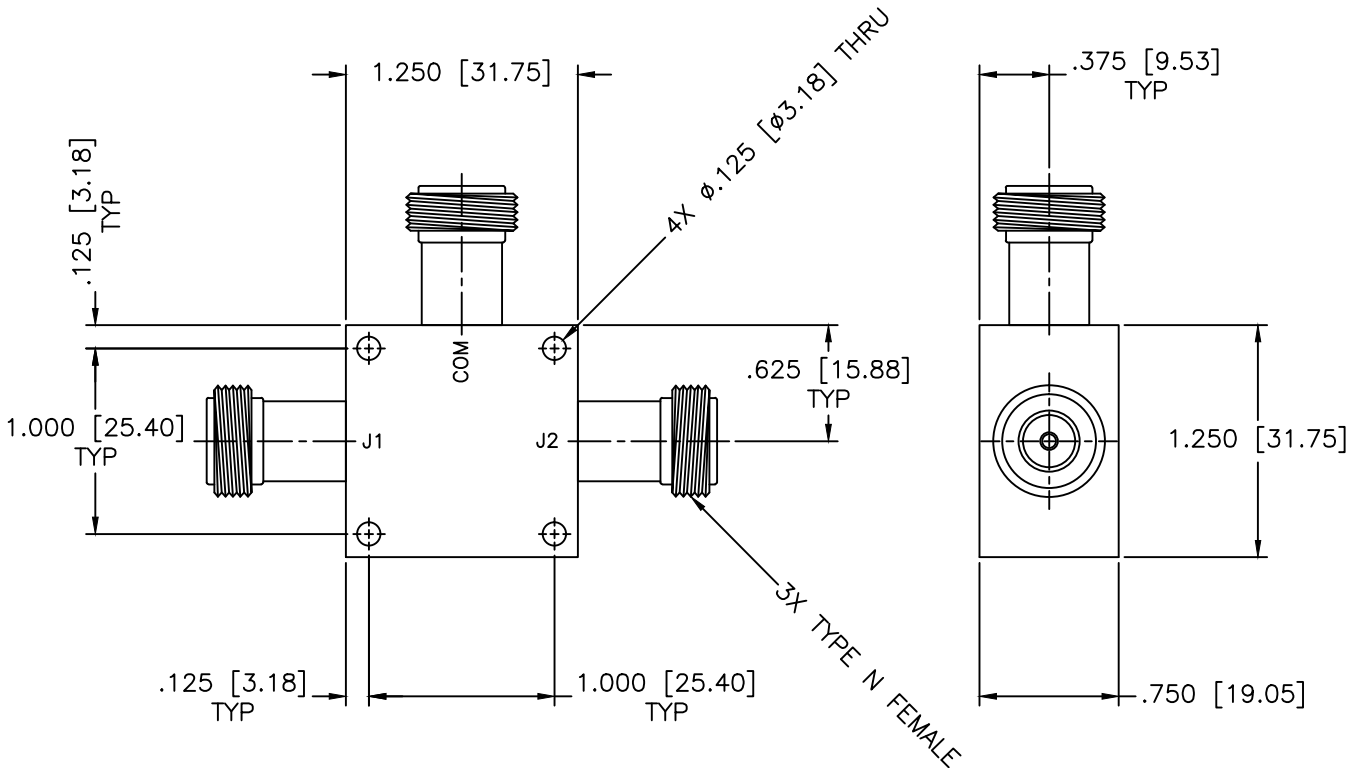

SPECIFICATIONS

Frequency Range: 0.3–60 MHz
 Isolation: 35dB Min.
 Insertion Loss: 0.5dB Max.
 Amplitude Balance: ±0.2dB Max.
 VSWR: 1.30:1 Max.
 Phase Balance: ±1.0dB Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-22-1997
APPROVED: T. Nguyen	DATE: 10-22-1997

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DRAWING TITLE: 2-WAY POWER DIVIDER	
PART NO. PL2-1/NF		CAGE CODE: OD2L5	
THIRD ANGLE PROJECTION 		SIZE: A DO NOT SCALE THE DRAWING	REV: N/A DWG NO. 80115