


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

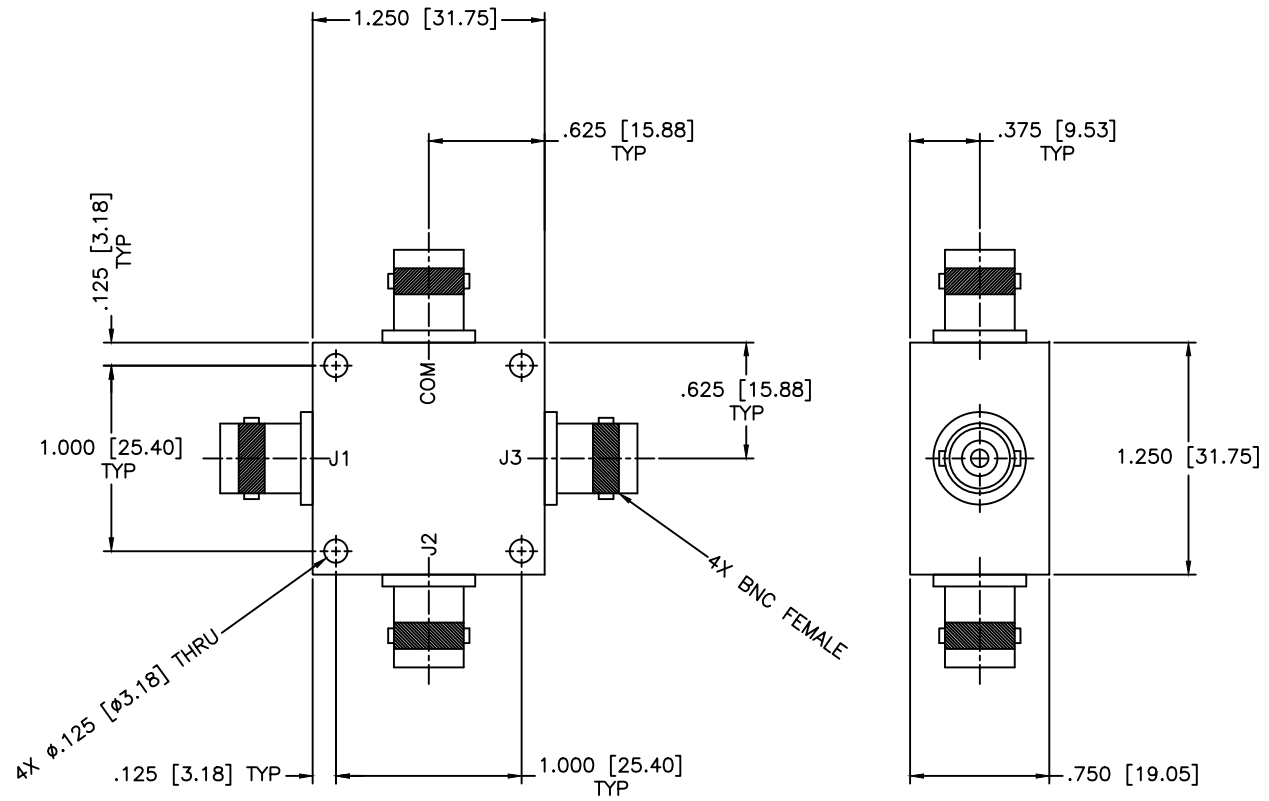

SPECIFICATIONS

Frequency Range: 10–500 MHz
 Isolation: 30dB Min.
 VSWR: 1.30:1 Max.
 Insertion Loss: 0.7dB Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±2 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 3-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 12-21-2006		PART NO. PL3-2-75/BF		
APPROVED: T. Nguyen		DATE: 12-21-2006		CAGE CODE: OD2L5	SIZE: A	REV: N/A
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DWG NO. 81743		DO NOT SCALE THE DRAWING

